


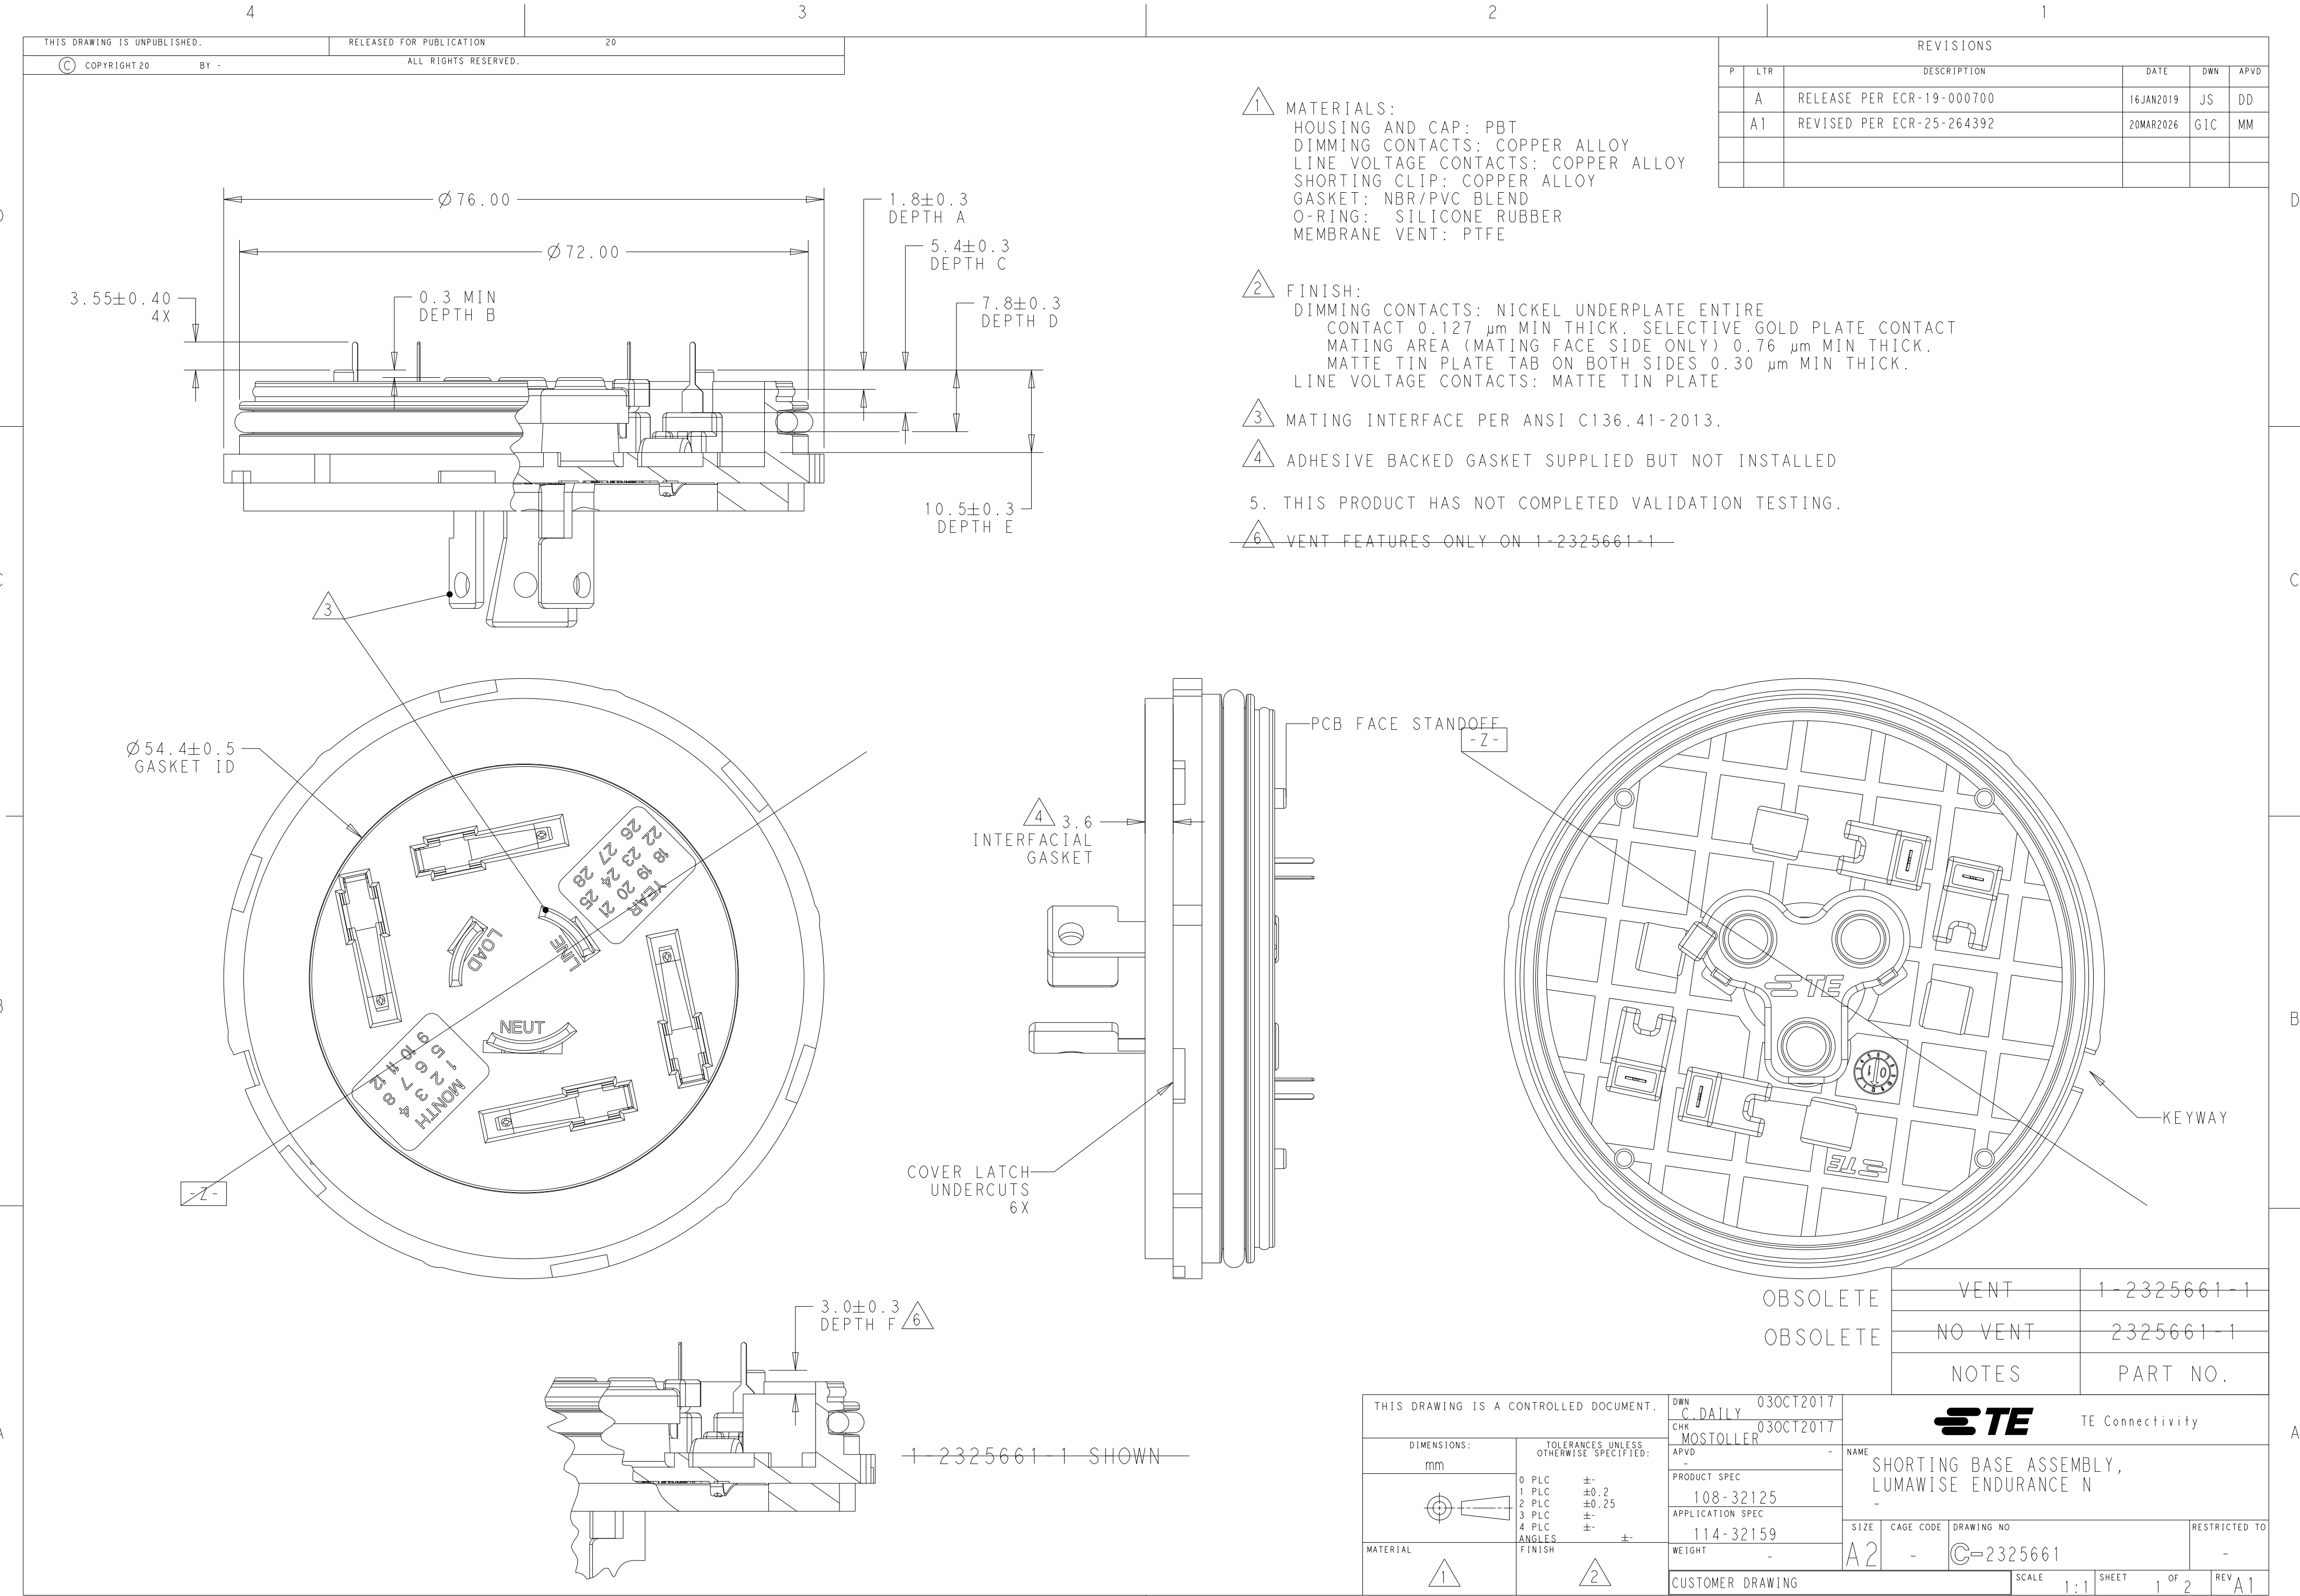

1 MATERIALS:
HOUSING AND CAP: PBT
DIMMING CONTACTS: COPPER ALLOY
LINE VOLTAGE CONTACTS: COPPER ALLOY
SHORTING CLIP: COPPER ALLOY
GASKET: NBR/PVC BLEND
O-RING: SILICONE RUBBER
MEMBRANE VENT: PTFE

2 FINISH:
DIMMING CONTACTS: NICKEL UNDERPLATE ENTIRE
CONTACT 0.127 µm MIN THICK. SELECTIVE GOLD PLATE CONTACT
MATING AREA (MATING FACE SIDE ONLY) 0.76 µm MIN THICK.
MATTE TIN PLATE TAB ON BOTH SIDES 0.30 µm MIN THICK.
LINE VOLTAGE CONTACTS: MATTE TIN PLATE

3 MATING INTERFACE PER ANSI C136.41-2013.


4 ADHESIVE BACKED GASKET SUPPLIED BUT NOT INSTALLED

5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.


6 VENT FEATURES ONLY ON 1-2325661-1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE PER ECR-19-000700	16JAN2019	JS	DD
	A1	REVISED PER ECR-25-264392	20MAR2026	GIC	MM

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	03OCT2017	STE TE Connectivity	
			CHK	03OCT2017		
			APVD	-	NAME	
			PRODUCT SPEC	108-32125	SHORTING BASE ASSEMBLY, LUMAWISE ENDURANCE N	
			APPLICATION SPEC	114-32159	SIZE	
			WEIGHT	-	CAGE CODE	
			CUSTOMER DRAWING	SCALE	DRAWING NO	
				1:1	C-2325661	
				SHEET	RESTRICTED TO	
				1 OF 2	-	
					REV A1	

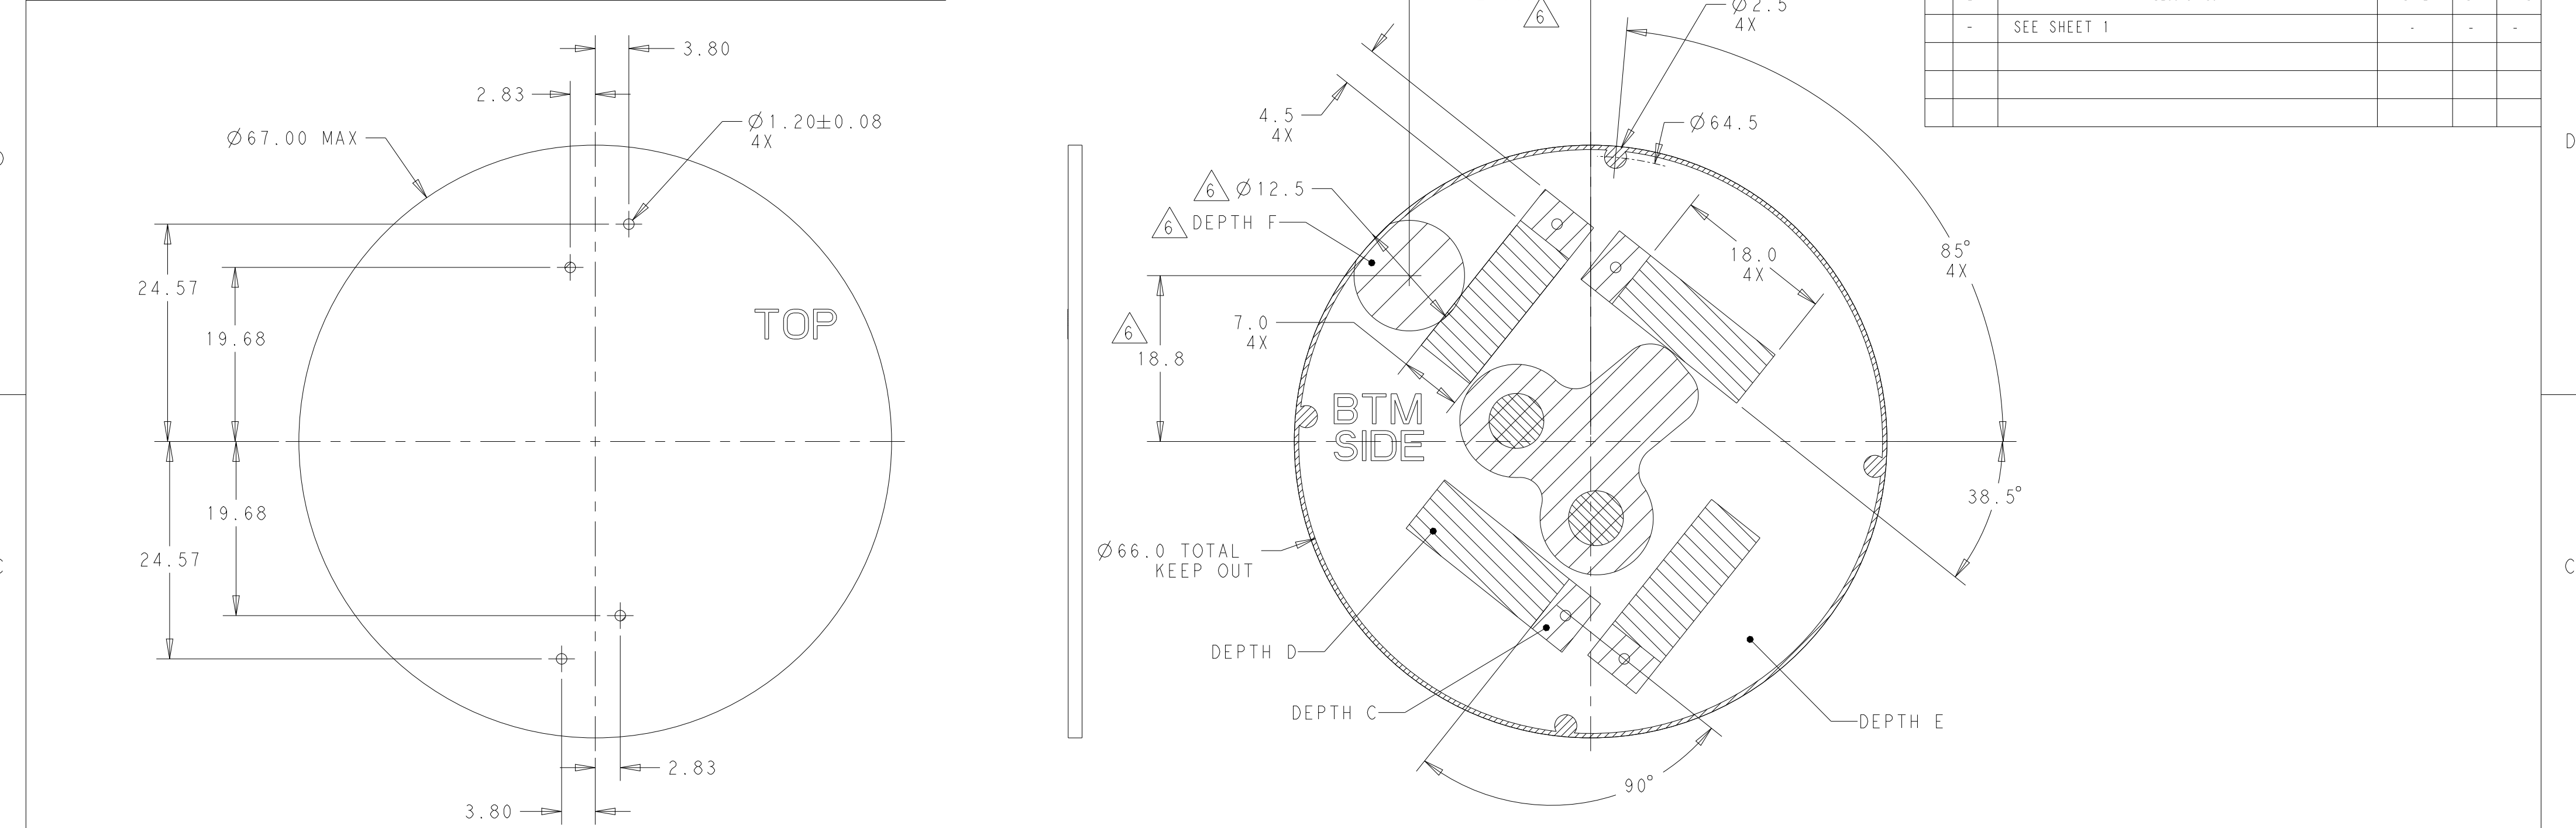

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

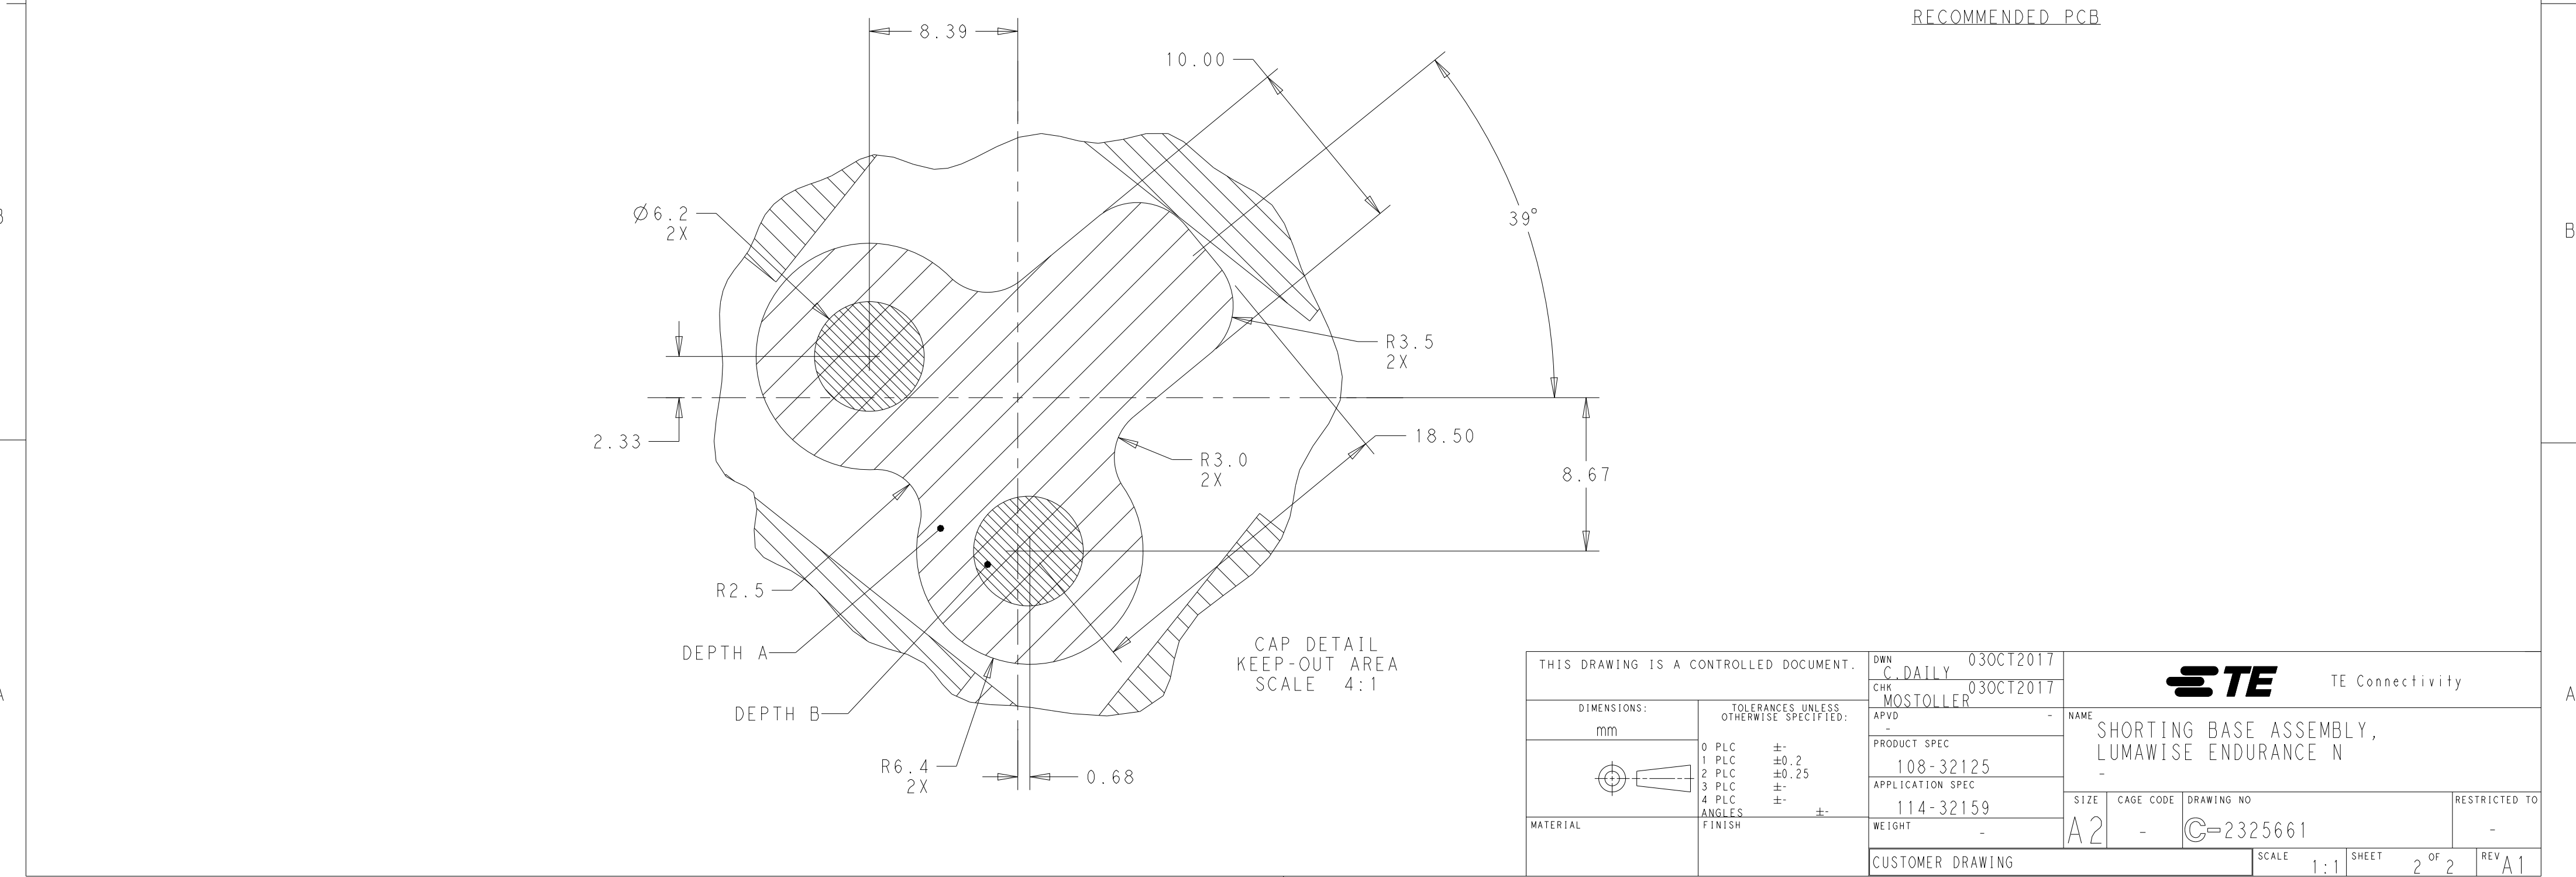

RECOMMENDED PCB

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY 03OCT2017	TE Connectivity			
DIMENSIONS:		CHK M. STOLLER 03OCT2017				
mm		APVD -	NAME SHORTING BASE ASSEMBLY, LUMAWISE ENDURANCE N			
		PRODUCT SPEC 108-32125	SIZE A2			
		APPLICATION SPEC 114-32159				
MATERIAL		WEIGHT -	CAGE CODE -	DRAWING NO C-2325661	RESTRICTED TO -	
		CUSTOMER DRAWING	SCALE 1:1	SHEET 2 OF 2	REV A1	