

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS					
CM		52		P	LTR	DESCRIPTION	DATE	OWN	APVD
					AH3	REVISED PER ECR-24-208420	15MAY24	SK	JP
					AH4	REVISED PER ECR-26-282871	30JUN26	MX	JP



△ 0.00038 MIN SELECTIVE GOLD PLATING ON INSIDE OF RECEPTACLE AND WIRE BARREL OVER NICKEL OVER ALL UNDERPLATE.

△ 0.00076 MIN SELECTIVE GOLD PLATING ON INSIDE OF RECEPTACLE AND WIRE BARREL OVER NICKEL OVER ALL UNDERPLATE.



3. WIRE RANGE: 0.2 - 0.6 MM² (24 - 20 AWG)

4. INSULATION RANGE: 1.14 - 1.78


△ REVERSED REELED.

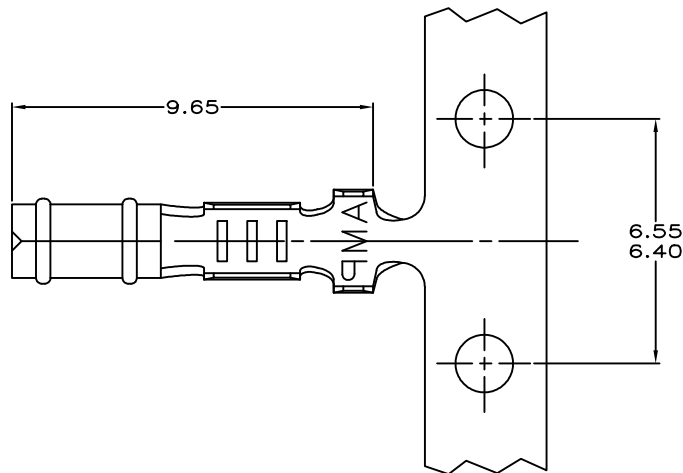

SECTION A-A

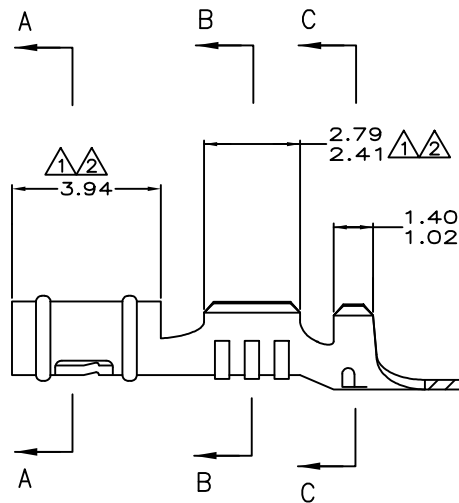

SECTION B-B



SECTION C-C

SUPERSEDED BY 1-60598-0

△	0.25 BE CU	1-60598-0
△	0.25 BE CU	60598-9
△	0.25 BE CU	60598-8
△	0.25 PH BRZ	60598-7
△	0.25 PH BRZ	60598-6
△	0.25 PH BRZ	60598-5
△	MATTE TIN	0.25 BE CU
	PRE-TIN	0.25 PH BRZ
	MATTE TIN	0.25 BE CU
△	PRE-TIN	0.25 PH BRZ
	FINISH	MATERIAL
		PART NUMBER

1.14	.045	1.91	.075	2.79	.110	-	-
1.02	.040	1.78	.070	2.54	.100	9.65	.380
0.25	.010	1.486	.0585	2.41	.095	6.55	.258
0.13	.005	1.47	.058	2.24	.088	6.40	.252
0.00076	.000030	1.40	.055	2.16	.085	3.94	.155
0.00038	.000015	1.359	.0535	1.93	.076	2.92	.115
MM	IN	MM	IN	MM	IN	MM	IN

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRN T. BECK 5-08-97	TE Connectivity	
DIMENSIONS: mm		CHK R. SWING 5-08-97	NAME RECEPTACLE, .058 DIAMETER, 24-20 AWG, .045-.070 INSULATION, P.C. CONTACT	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. BEDDICK 8-22-97	RESTRICTED TO	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-1025 APPLICATION SPEC 114-1008	SIZE A2	
MATERIAL SEE TABLE		FINISH SEE TABLE	CAGE CODE 00779	
		WEIGHT -	DRAWING NO C=60598	
		CUSTOMER DRAWING		SCALE 10:1
		SHEET 1 of 1		REV AH4