
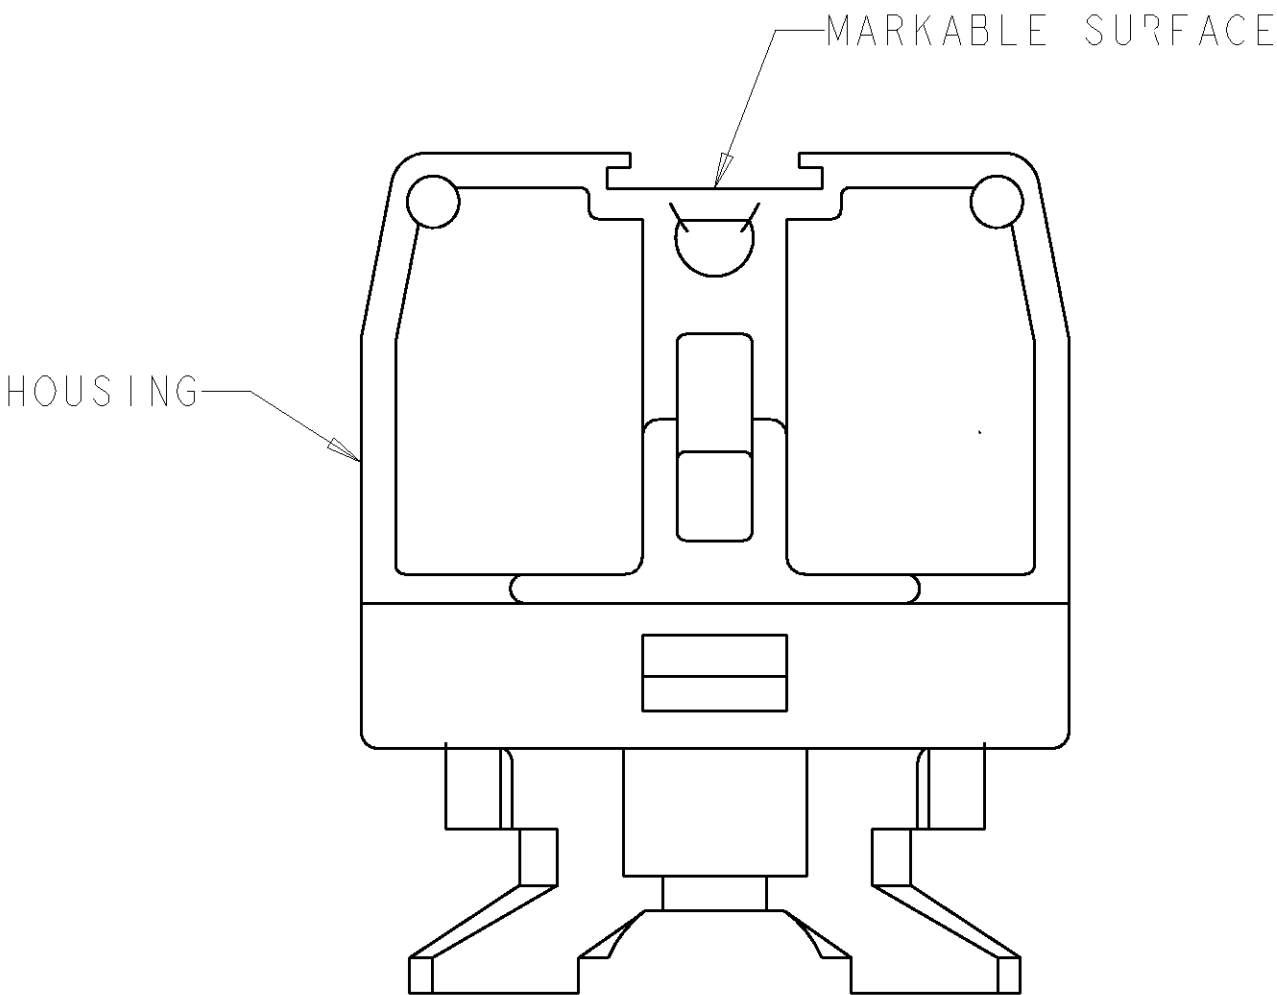
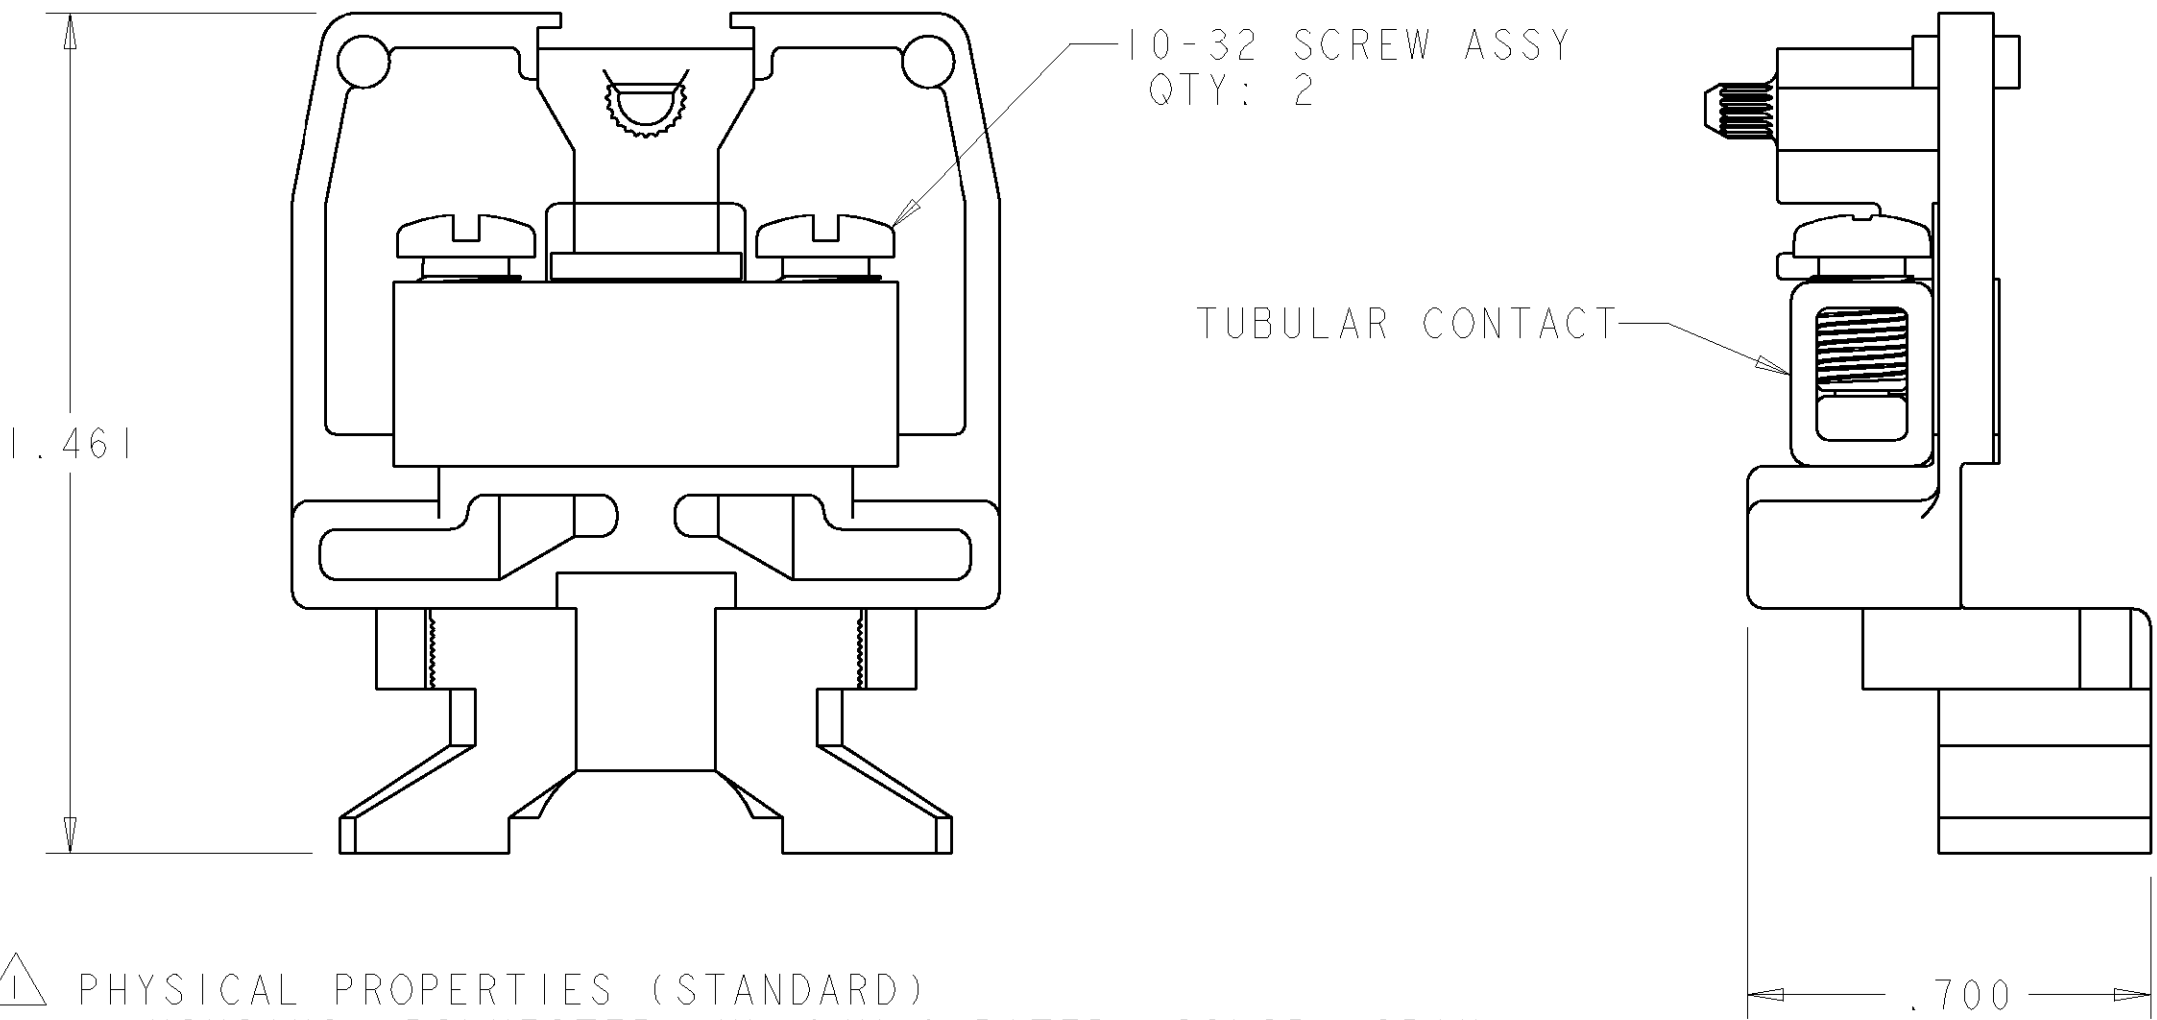


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
	0		F	DRAWING REV UPDATED TO MATCH PART REVISION	23FEB2015	NV	PS

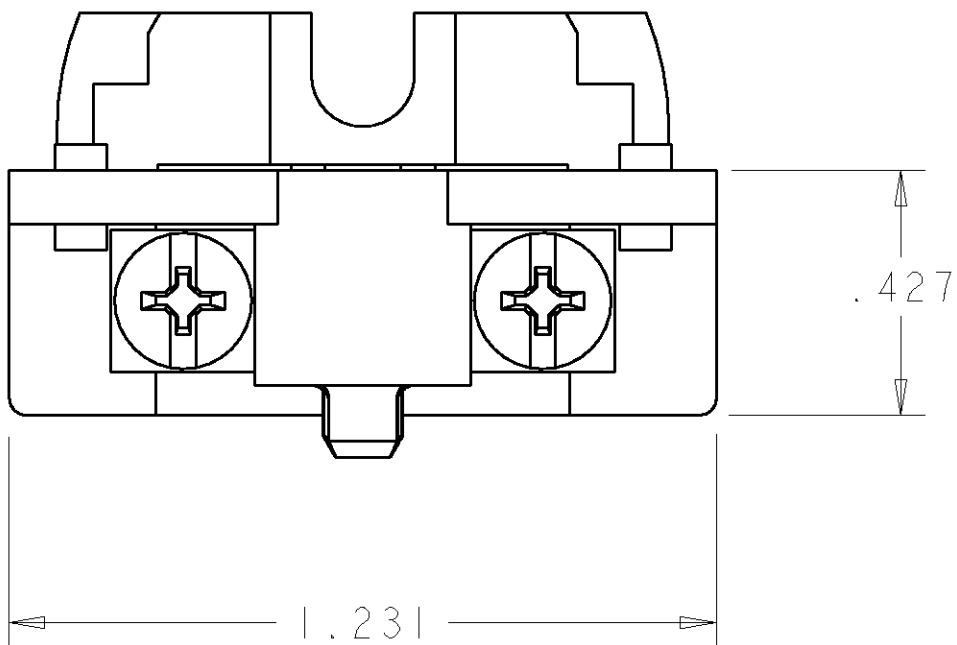

1. PHYSICAL PROPERTIES (STANDARD)
HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
TUBULAR CONTACT: COPPER ALLOY, ZINC PLATED.
SCREW ASSY - SCREW: STEEL, ZINC PLATED CLEAR CHROMATE.
CUP CLAMP: COPPER ALLOY, UNPLATED.

2. PHYSICAL PROPERTIES (DURAMAX)
HOUSING: POLYESTER, UL 94V-0 RATED, COLOR: GRAY.
TUBULAR CONTACT: COPPER ALLOY, NICKEL PLATED.
SCREW ASSY - SCREW: STEEL, NICKEL PLATED.
CUP CLAMP: COPPER ALLOY, NICKEL PLATED

3. MECHANICAL
PITCH: .375
MOUNTING: STANDARD CHANNEL AND CLAMP.
OPERATING TEMPERATURE: 150°C MAX.
TORQUE: RECOMMENDED TIGHTENING TORQUE IS 8 IN-LBS.

4. ELECTRICAL
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 600 V
WIRE RANGE: 10-22 AWG.

5. SEE RESTRICTED CUSTOMER DRAWING 4-1437394-6.

-	4-1437394-6	5
2	1546235-2	
1	1546235-1	
MATERIAL / FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN S. WELDON 15JAN2002	TE Connectivity			
DIMENSIONS: INCHES		CHK S. YODER 15JAN2002				
		APVD S. YODER 15JAN2002	NAME ASSEMBLY, TERMINAL BLOCK, NEMA, DOVETAIL BASE, MEDIUM DUTY, TUBULAR CLAMP			
		PRODUCT SPEC	SIZE A2			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE 00779			
0 PLC ± 1 PLC ±0.0 2 PLC ±0.00 3 PLC ±0.010 4 PLC ±0.0000 ANGLES ±		WEIGHT	DRAWING NO 1546235			
FINISH		CUSTOMER DRAWING	RESTRICTED TO			
SEE TABLE		SCALE 3:1	SHEET 1 OF 1			
			REV F			