

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
U		REVISED PER ECR-24-213594	01JUL2024	RK	FJS

D

C

B




A

D

C

B

A

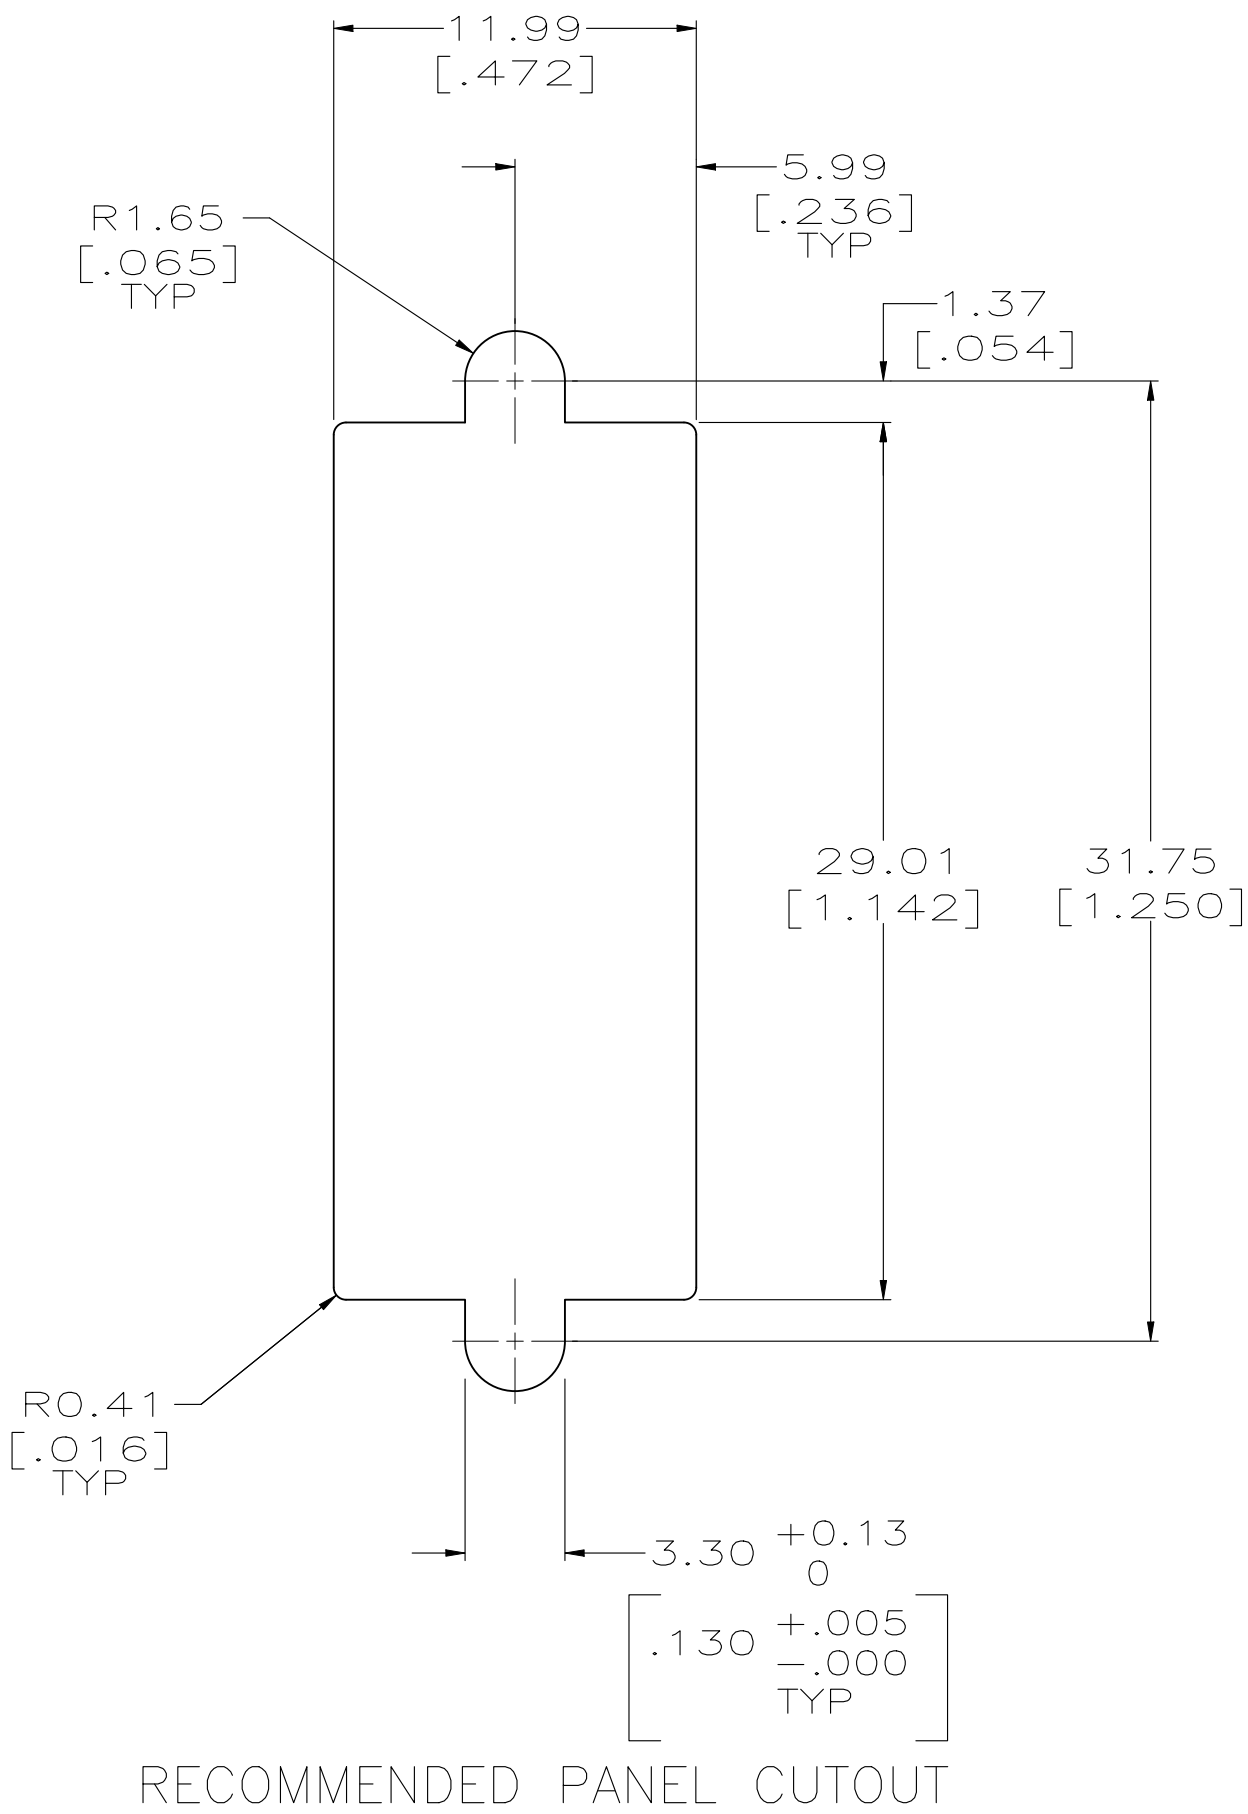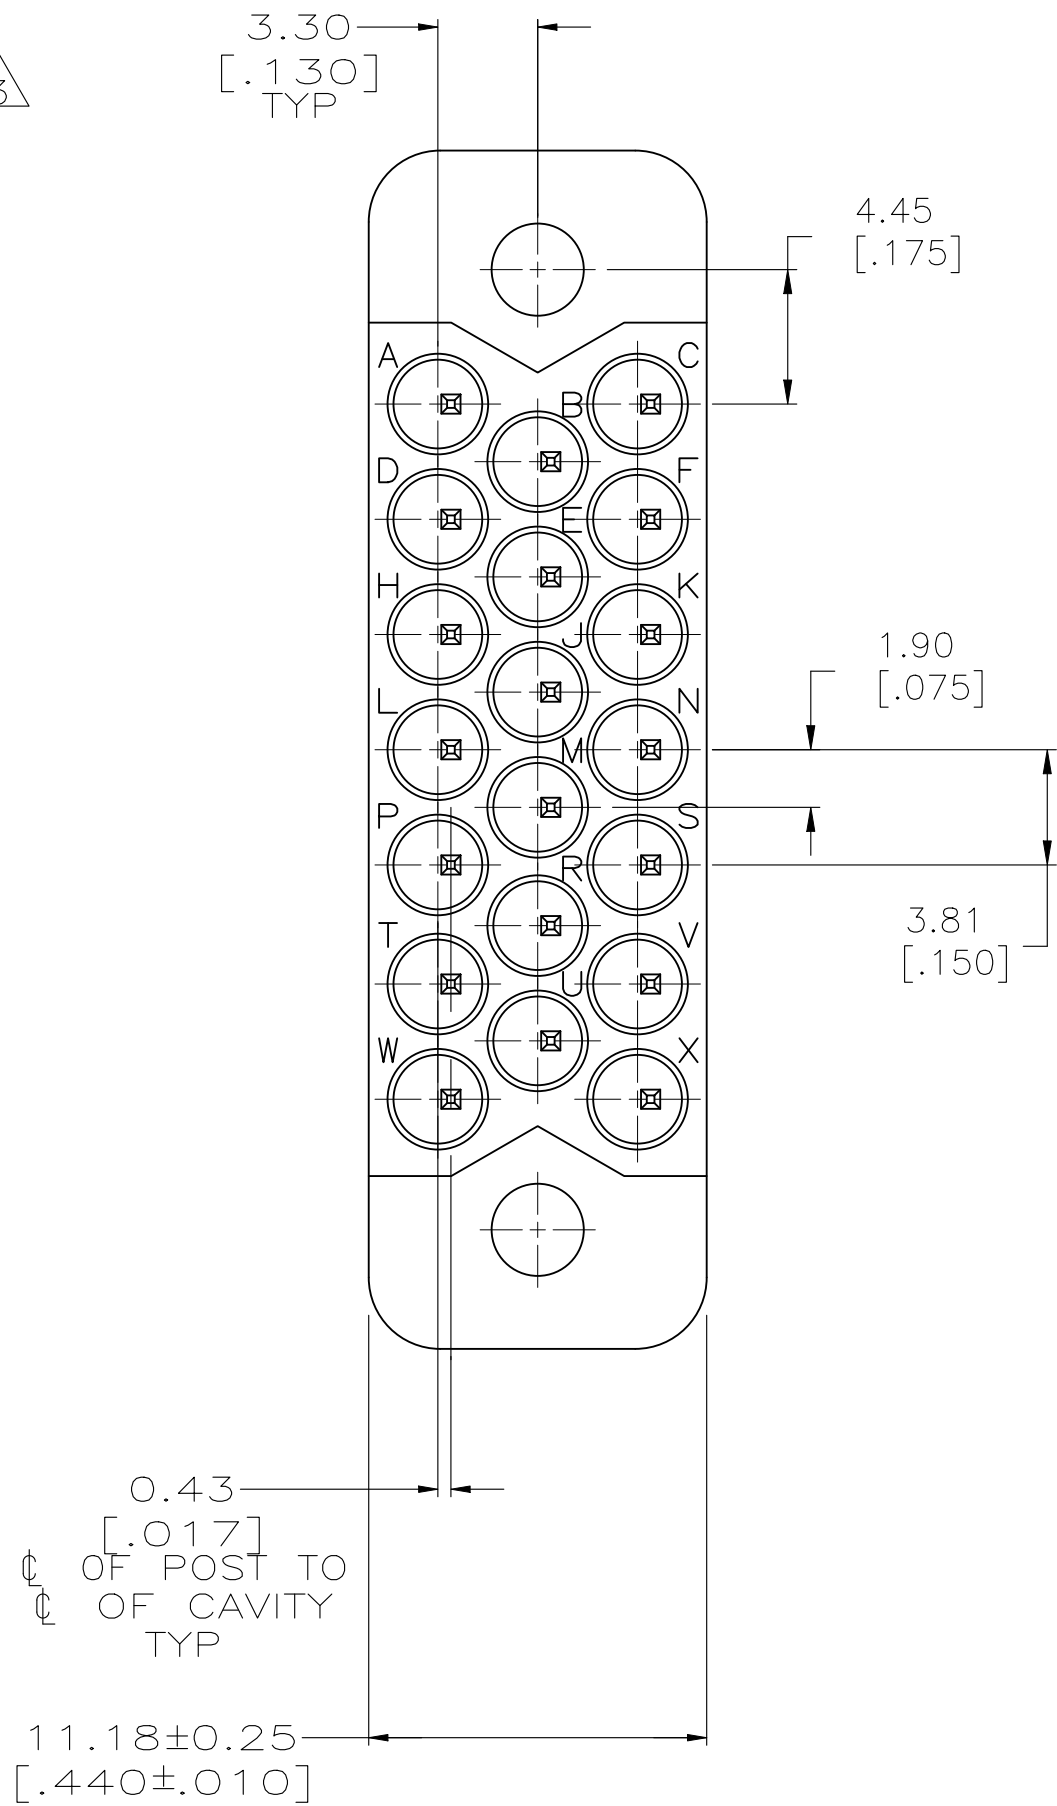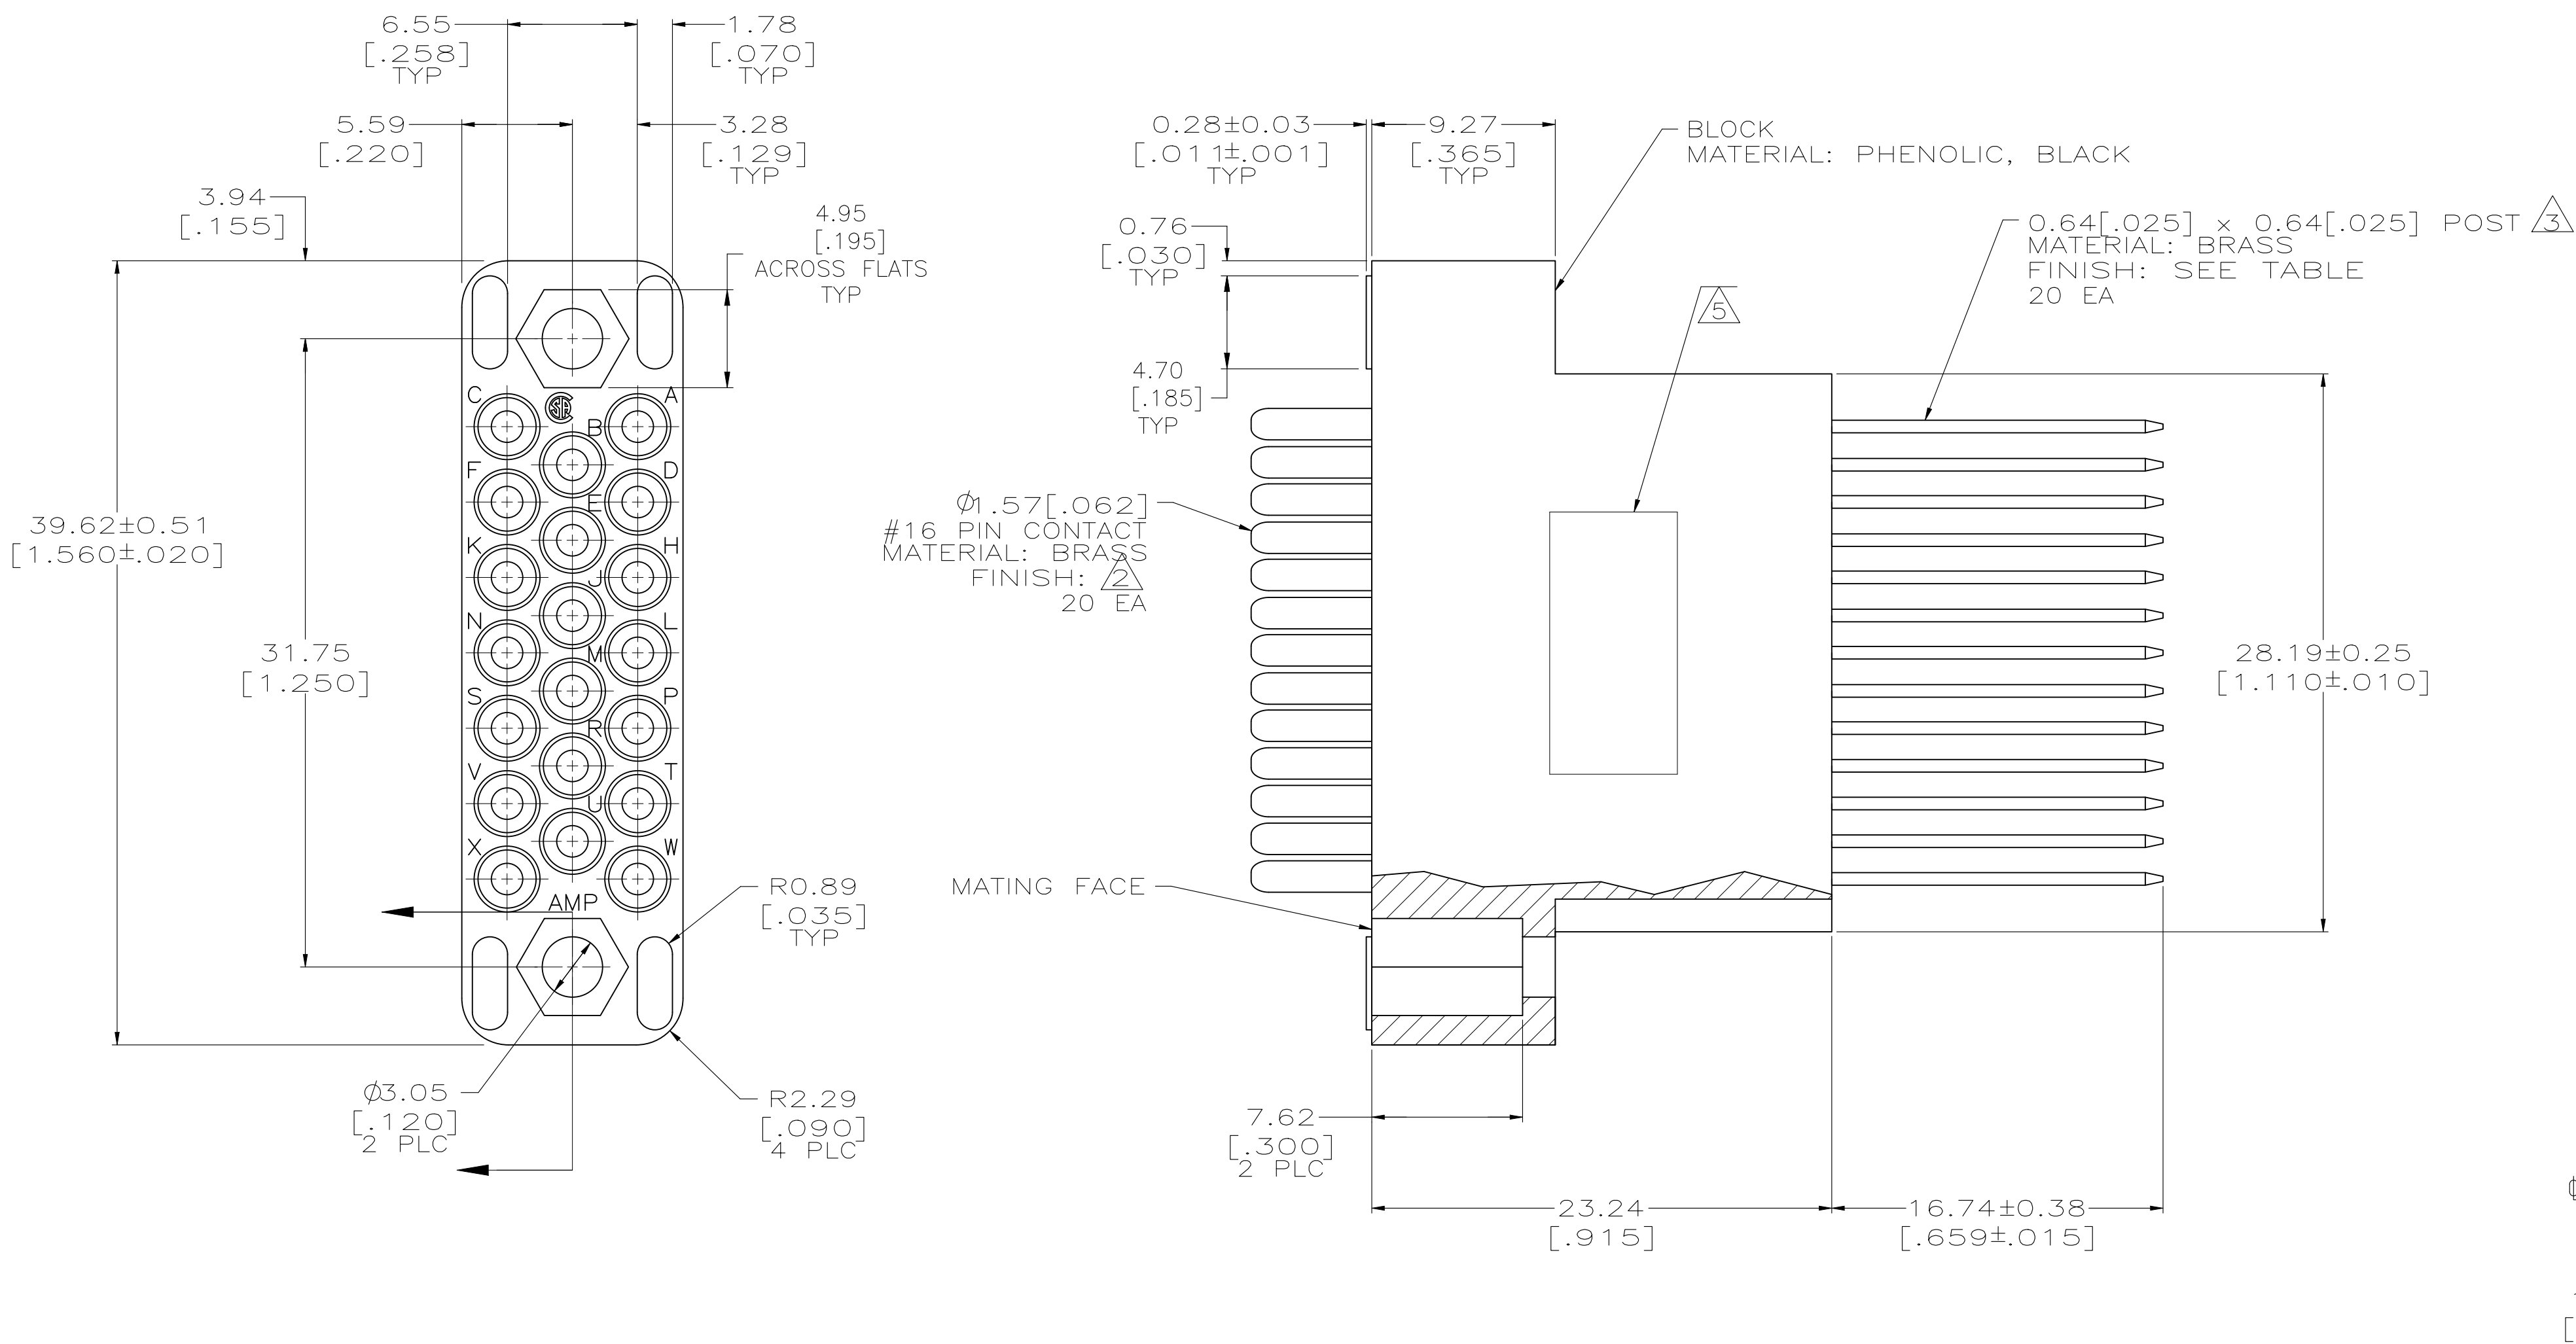

- Δ 2.54µm[.000100] MIN TIN-LEAD OVER 1.27µm[.000050] MIN NICKEL.
- Δ 0.76µm[.000030] MIN PRECIOUS METAL PLATE FOR A LENGTH OF 6.35[.250] FROM MATING END WITH GOLD FLASH ON REMAINDER, ALL OVER 1.27µm[.000050] MIN NICKEL.
- Δ POSTS ARE SEMI-AUTOMATICALLY WIREABLE AND WILL ACCEPT 3 TERMINATIONS.
- 4. #24 AWG MAX WIRE TO BE USED WITH THIS CONNECTOR.
- Δ AMP, PART NUMBER, DATE CODE & THE LETTER P MARKED IN THIS AREA.
- Δ 2.54µm[.000100] MIN TIN OVER 1.27µm[.000050] MIN NICKEL.

	Δ	4-205509-7
OBSOLETE	Δ	205509-1
	POST PLATING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. REIFSNYDER 12 FEB 96		
		CHK R. STONE 22 FEB 96		
DIMENSIONS: mm [INCHES]		APVD M. MCALONIS 22 FEB 96	NAME	
		PRODUCT SPEC		
		APPLICATION SPEC		
		WEIGHT		
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	SIZE CAGE CODE DRAWING NO	
			RESTRICTED TO	
			CUSTOMER DRAWING	
			SCALE 4:1 SHEET 1 OF 1 REV U	