



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
M3		REVISED PER ECN-25-331124	07JUL2025	NG	SA

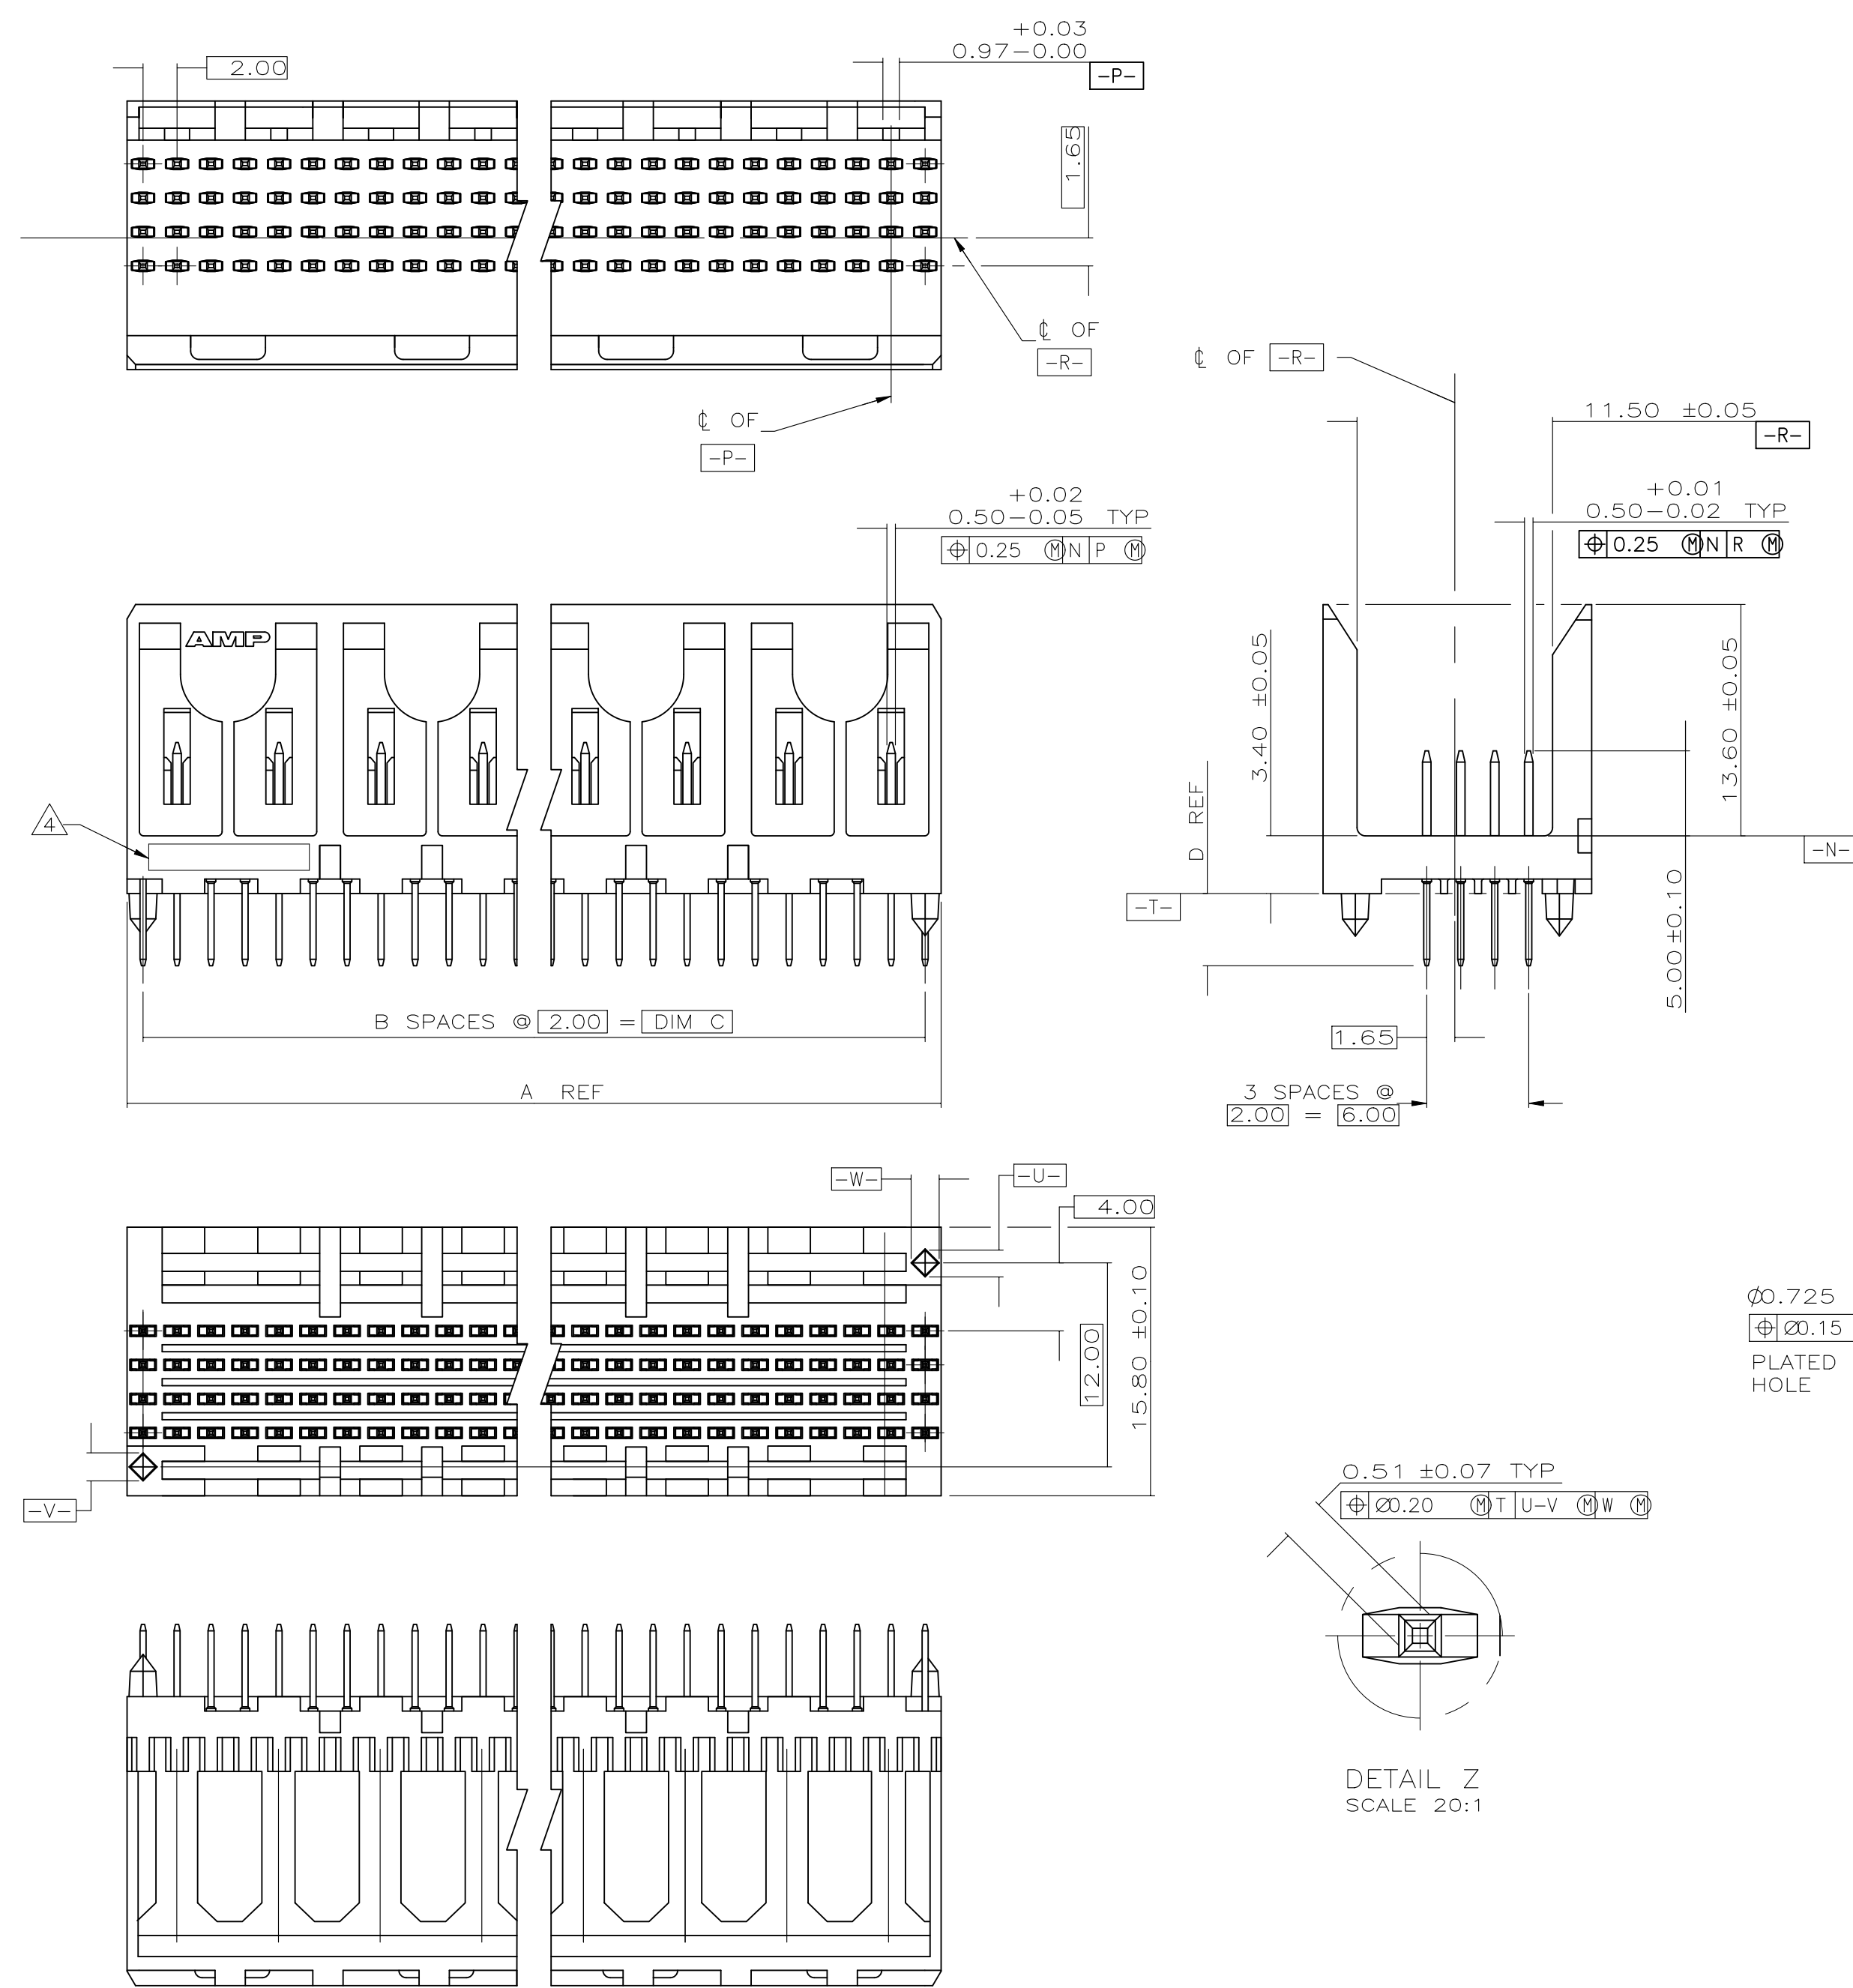

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER ASTM D5138 LCP000 G30A 32250.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE.
- 3 CONTACT FINISH:
 - UNDERPLATE (ENTIRE CONTACT): 0.00127 MIN NICKEL.
 - ON MATING SURFACES: CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT.
 - ON LEADS: 0.00381 MIN TIN-LEAD OVER UNDERPLATE.
 - LUBRICATION (ENTIRE CONTACT): SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- 4 PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.

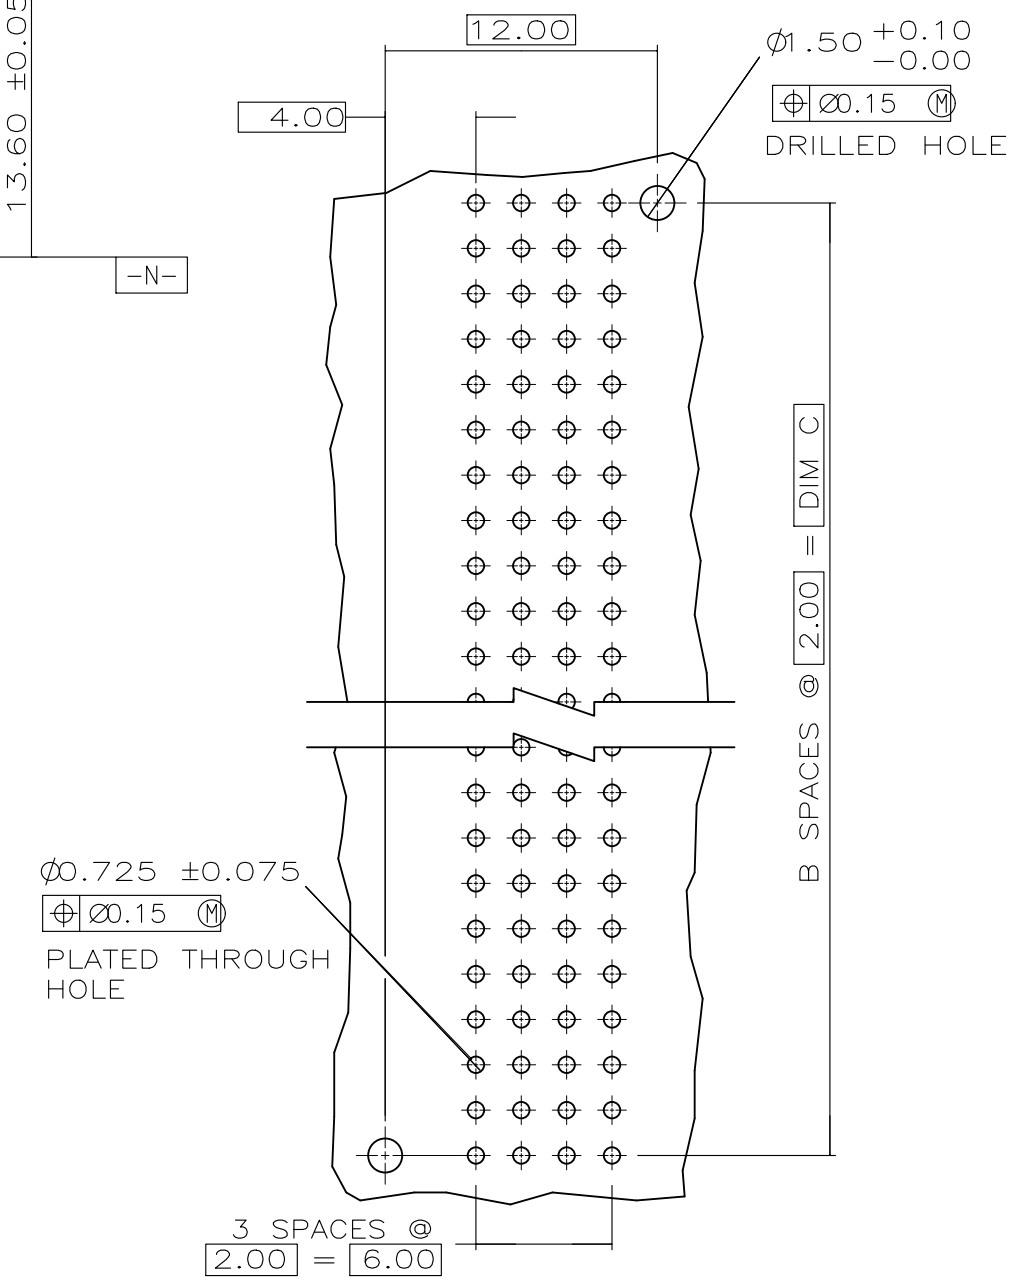

RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

	4.25	70.00	35	71.88	3	144	536513-5
	4.25	94.00	47	95.88	3	192	536513-4
M3	OBSOLETE	4.25	46.00	23	47.88	3	96
M2	OBSOLETE	4.25	22.00	11	23.88	3	48
M2	OBSOLETE	4.25	10.00	5	11.88	3	24
	D	C	B	A	FINISH	NO. OF POSN	NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	04/01/93	TE Connectivity			
		CHK	04/05/93				
		APVD	04/02/93	NAME			
		PRODUCT SPEC		PIN ASSEMBLY, SIGNAL MODULE, Z-PACK 2mm FB			
		APPLICATION SPEC		2mm			
		WEIGHT	0.000000	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		CUSTOMER DRAWING		A2	00779	C=536513	-
		SCALE	4:1	SHEET	1 of 1	REV	M3