

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

(C) COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

DESCRIPTION

DATE

DWN

APVD

P

LTR




C2

REVISED PER ECR-14-013099

09DEC2014

NK

GJ

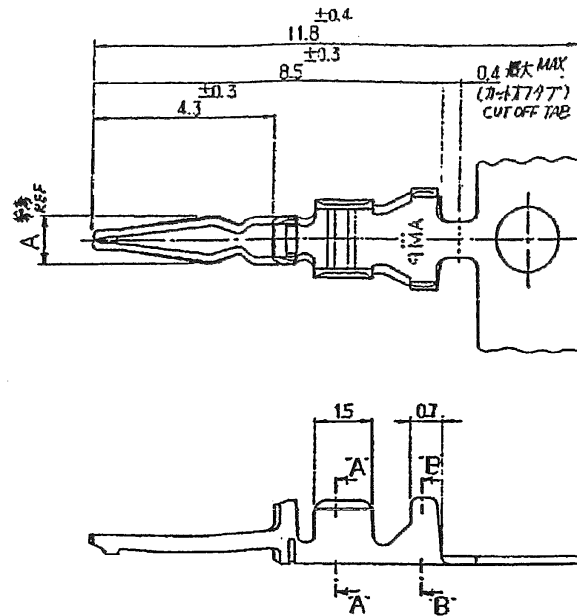

NOTES:


1. APPLICABLE HDR HSG :172520(2.5PITCH)
:172890(2.0PITCH)
 2. PRODUCT SPEC:108-5163
 3. CRIMPING SPEC:114-5062
COMMON APPLICATOR FOR 2/2.5MM PITCH
HDR HSG:P/N 755764-X
EXCLUSIVE APPLICATOR FOR 2.5MM PITCH
HDR HSG:P/N 752829-X
 4. INSTRUCTION SHEET:IS-206J,207J,208J
5. LOOSE PIECE 172797-X SUPERSEDED
BY CONTINUOUS 172781-X.

注記

1. 適用ハウジング型番:172520(2.5MMピッチ用)
:172890(2.0MMピッチ用)
2. 製品規格: 108-5163
2/2.5MMピッチ・ヘッダーハウジング
専用アプリケーション型番: 755764-X
2.5MMピッチ・ヘッダーハウジング
専用アプリケーション型番: 752829-X
4. 取扱説明書: IS-206J,207J,208J

1.2	1-0.05 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-4
0.95	0.8±0.1 DIA	1.2-1.6	5	POST-TINNED BRASS 0.2t 錫めっき仕上黄銅0.2t	172781-3
1.2	1-0.05 DIA	1.2-1.6	5	PRE-TINNED BRASS 0.2t	172781-2
0.95	0.8±0.1 DIA	1.2-1.6	5	錫めっき済黄銅0.2t	172781-1
A REF	APPLICABLE PCB HOLE AND THK	LOOSE PIECE CONTACT P/N	MATERIAL	PART NO.	型番
参考 A寸法	適用基板穴径と板厚	バラ状端子型番	材料		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 純
mmMATERIAL
材料
SEE TABLETOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差10 ≤ ± 0.2
10 < ≤ 30 ± 0.25
30 < ≤ 100 ± 0.3
ANGLES ± 5°FINISH
仕上

DWN J.SATO 120CT05

CHK N.YAMASAKI 120CT05

APVD N.YAMASAKI 120CT05

PRODUCT SPEC
製品規格APPLICATION SPEC
取付適用規格

WEIGHT

CUSTOMER DRAWING

NAME

名称

SIZE

CAGE CODE

DRAWING NO

番号

RESTRICTED TO

TE Connectivity

LOW PROFILE MINI AMP-IN CONTACT

A3 00779

C-172781

SCALE
尺度

SHEET 1 OF 1

REV C2