

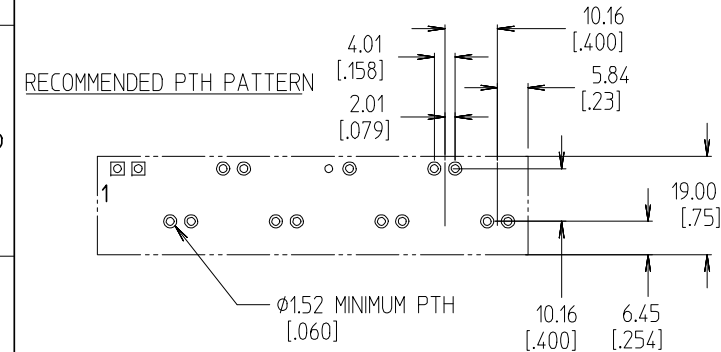
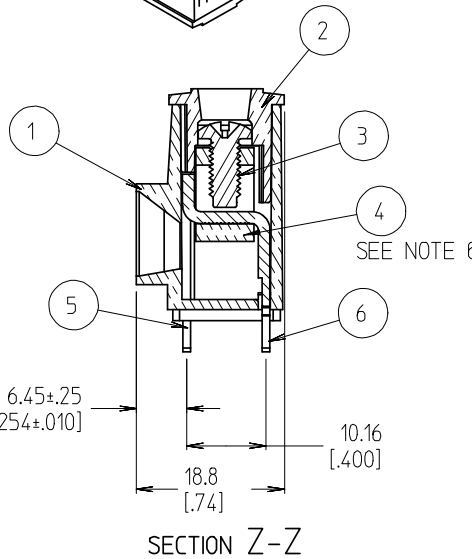
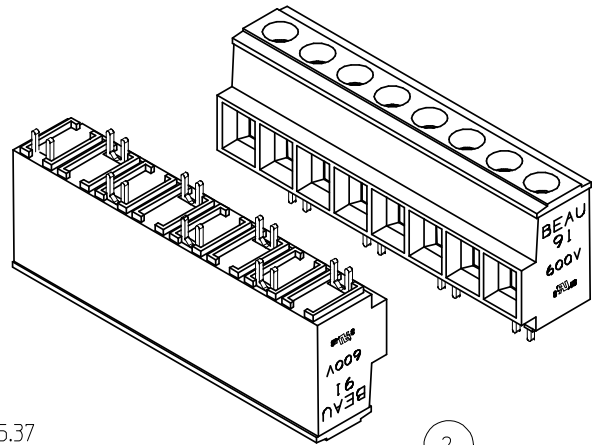


	10	9	8	7	6	5	4	3	2	39910
	MATERIAL NO. W/ CAGES CLOSED	NUMBER OF CIRCUITS	"A" DIM.	"B" DIM.						
F	-	02	21.8 [.86]	10.16 [.400]						
	-	03	32.0 [1.26]	20.32 [.800]						
	-	04	42.2 [1.66]	30.48 [1.200]						
	-	05	52.3 [2.06]	40.64 [1.600]						
	-	06	62.5 [2.46]	50.80 [2.000]						
	-	07	72.6 [2.86]	60.96 [2.400]						
	-	08	82.8 [3.26]	71.12 [2.800]						
	-	09	93.0 [3.66]	81.28 [3.200]						
	399100910	10	103.1 [4.06]	91.44 [3.600]						
E	-	11	113.3 [4.46]	101.60 [4.000]						
	399100912	12	123.4 [4.86]	111.76 [4.400]						
	-	13	133.6 [5.26]	121.92 [4.800]						
	-	14	143.8 [5.66]	132.08 [5.200]						

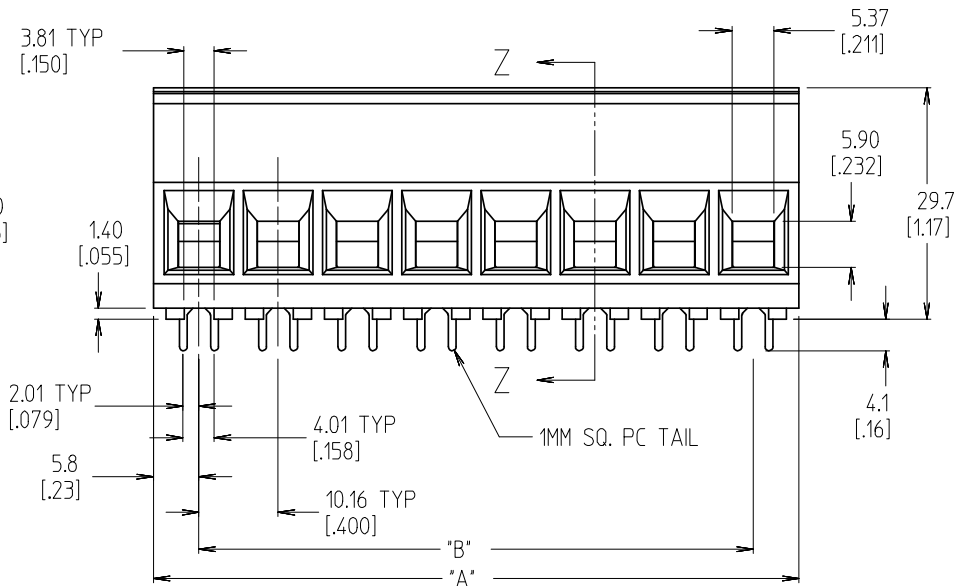

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. INCH DIMS ARE SHOWN IN BRACKETS [XXX].
 4. DESIGNED TO MEET UL 1059 CLASS C 600 VOLTS
 5. "XX" REFERS TO THE NUMBER OF CIRCUIT POSITIONS.
 6. SCREWS ARE DRIVEN DOWN FULLY TO CLOSE CAGE CLAMPS.
 7. ASSEMBLY IS ROHS COMPLIANT BY EXEMPTION. COMPONENTS MARKED WITH AN ASTERISK (*) ARE ROHS COMPLIANT BY EXEMPTION, ALL OTHERS ARE ROHS COMPLIANT.

6	A/R	REAR TERMINAL	COPPER	TIN PLATE
5	A/R	FRONT TERMINAL	COPPER	TIN PLATE
4	XX	CAGE CLAMP (*)	BRASS	NICKEL PLATE
3	XX	SCREW, M4, #2 POZI-SLOT	BRONZE	TIN PLATED
2	1	COVER	PBT	BLACK
1	1	BODY	PBT	BLACK
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

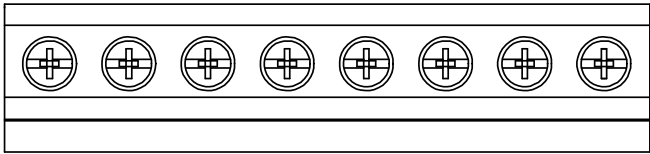

INITIAL RELEASE EC NO: ETC2007-0418 DRWN: CLYORK 2007/05/15 CHKD: MACNEIL 2007/05/15 APPR: MACNEIL 2007/05/15 A	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .01 1 PLACE ± 0.3 ± --- ANGULAR ± 2 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DIMENSION STYLE MM/IN DRAWN BY C. YORK DATE 2007/05/11 CHECKED BY J. MACNEIL DATE 2007/05/11 APPROVED BY J. MACNEIL DATE 2007/05/11 MATERIAL NO. SEE CHART SIZE B	SCALE 3:2 DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE 10.16MM [.400"] SR BTS 6 AWG ASSY, 60 AMP, 600V W/ CAGES CLOSED MOLEX INCORPORATED DOCUMENT NO. SD-39910-003 SHEET NO. 1 OF 1