

Bluetooth and WiFi 6 Modules

- [BC15C](#), [BC15M](#), [BC15P](#) (\$4.11@1K pcs): compact nRF54L15 modules; both 32M and 32K crystals embedded; size from 6.0x6.3mm. Certified for portable.
- [BM05M](#), [BM05F](#), low cost nRF54L05 modules; 500KB flash/96KB RAM, price from \$2.86 @ 1K pcs.
- [BM15C](#), [BM15E](#), [BM15M](#) (\$3.21@1K pcs) nRF54L15 BLE 6.0 modules. Cortex M33 at 128 MHz, 1.5MB flash, 256 KB RAM; +8 dBm TX power, -98 dBm receiver sensitivity at 1Mbps; PSA level 3 security.
- **Bluetooth 5.4 and WiFi 6 Combo:** [WT02C40C](#), [WT02E40C](#), [WT02P40P](#), [WT02V40V](#), [WT02E40E](#) (\$10.86@1K pcs). Nordic nRF7002 and nRF5340 combo, quad-radio (5GHz WiFi6; 2.4 GHz WiFi 6, BLE 5.4, 802.15.4) modules.

- [WM02C](#), [WM02E](#), [WM02V](#), [WM02P](#), [WM02F](#) (\$4.20@1K pcs): nRF7002 Companion 2.4GHz+5 GHz WiFi 6, IEEE 802.11 a/b/g/n/ac/ax
- [BM833P-T](#), [BM833F-T](#) (\$5.95@1K pcs), nRF52833 modules with operating temperature verified from **-40°C to +125°C**. They are not certified for automobile applications. Production Q3 2025.

Coming Soon!

- [BMH20C](#), [BMH20E](#), [BMH20M](#) (\$11.30@1K pcs): nRF54H20 Bluetooth 6.0 modules: Dual core Cortex M33, up to 320MHz; Dual core RISC-V, up to 320MHz; 2MB flash, 1MB RAM; +10dBm TX power, -100 dBm receiver sensitivity at 1Mbps; USB port at 480 Mbps, a CAN FD controller, 14-bit ADC, I3C interfaces; PSA level 3 security. Samples Q1 2026.



Nordic nRF54L15 Compact Bluetooth 6.0 Modules. No external component required.

Module	BC15C	BC15E	BC15M	BC15P
Size, mm	6.0x11.0	6.0x10.5	6.0x9.6	6.0x6.3
SoC features	nRF54L15, Cortex M33 at 128MHz; 1524KB flash, 256 KB RAM			
Features	Max. TX power, + 8 dBm; Receiver sensitivity, -98 dBm; PSA level 3 security; NFC; directional finding			
GPIOs	30 GPIOs; 36 LGA pins			
Embedded crystals	32M+32K	32M+32K	32M+32K	32M+32K
Antenna	High performance chip	u.FL	PCB trace	Pads
Range, 1Mbps (2 ways)	90 meters		100 meters	400 M, est.
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
Certifications	BLE + 802.15.4; FCC,ISED,CE,UK,RCM,TELEC,NCC			
Eval board	EV-BC15C	EV-BC15E	EV-BC15M	EV-BC15P
1K price, ea.	\$4.70	\$4.27	\$4.32	\$4.11
Availability	Q3, 2025	Q3, 2025	Q3, 2025	Q3, 2025

Nordic nRF54L15 Bluetooth 6.0 Modules.

Module	BM15C	BM15E	BM15M	BM05M	BM05F
Size, mm	10x15.8	10x15.0	10x14	10.0 x 14.0	
SoC features	nRF54L15, Cortex M33 at 128MHz; 1524KB flash, 256 KB RAM			nRF54L05,Cortex M33,128MHz;500KB flash,96KB RAM	
Features	Max. TX power, + 8 dBm; Receiver sensitivity, -98 dBm; PSA level 3 security; NFC; directional finding.				
GPIOs	45 LGA pins, 32 GPIOs				
Embedded crystals	32M	32M	32M	32M	32M
Antenna	High perform. chip	u.FL	PCB Trace	PCB Trace	High perform. PCB
BLE Range,1Mbps/125Kbps	1000/2500 meters, est.		400/1000 meters, est.		
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
peak current RX					
Certifications	BLE + 802.15.4; FCC,ISED,CE,UK,RCM,TELEC,NCC			BLE; FCC,ISED,CE,UK,RCM,TELEC,NCC	
Eval board	EV-BM15C	EV-BM15E	EV-BM15M	EV-BM05M	EV-BM15F
1K price, ea.	\$3.91	\$3.55	\$3.21	\$2.86	\$3.49
Availability	Production	Production	Production	Q3, 2025	Q3, 2025

nRF54H20 BLE 6.0, 802.15.4 and WiFi 6 Combo



- No external component required. It uses minimum host PCB area. Both 32 MHz and 32.768 kHz crystals embedded.
- Will be certified for BLE and 802.15.4

- **Sample date of nRF54H20 modules is delayed to 2026.**

Nordic nRF54H20 Bluetooth 6.0 Modules. No external component required.

Module	BMH20M	BMH20C	BMH20E
Size, mm	10x14.0	10x15.8	10x15.0
SoC	nRF54H20, dual core Cortex M33, up to 320MHz; dual core RISC-V, up to 320 MHz		
Memory	1120KB total RAM, 2MB flash		
Features	USB at 480Mbps; a CAN FD controller; 14 bit ADC; I3C interfaces; PSA level 3 security;		
Features	NFC; Directional finding; Audio PLL, 2 x TDM, PDM; High speed SPIS, SPIM, UART;		
Features	SIMIF smart card interfaces;		
Embedded crystals	32M+32K	32M+32K	32M+32K
GPIO, pins	64 GPIOs; 90 LGA pins		
Antenna	PCB Trace	Chip	u.FL
Range, 1Mbps/125kbps	500/1200 meters, est.	1100/3000 meters, est.	
Max TX, SoC	+10 dBm	10 dBm	+10 dBm
Receiver sensitivity, at 1Mbps	-100 dBm	-100 dBm	-100 dBm
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
peak current RX			
Certifications			
Eval board	EV-BMH20M	EV-BMH20C	EV-BMH20E
1K price, ea.	\$11.30	\$12.52	\$11.92
Availability, samples	Q1, 2026	Q1, 2026	Q1, 2026

Nordic nRF54H20 Bluetooth 6.0 and nRF7002 WiFi 6 combo Modules. No external component required.

Module	WM02PH20P	WM02CH20C	WM02EH20E	WM02EH20C
Size, mm	10x14			
SoC	nRF7002 + nRF54H20, dual core Cortex M33, up to 320MHz; dual core RISC-V, up to 320 MHz			
Memory	1120KB total RAM, 2MB flash			
Features	USB at 480Mbps; a CAN FD controller; 14 bit ADC; I3C interfaces; PSA level 3 security;			
Features	NFC; Directional finding; Audio PLL, 2 x TDM, PDM; High speed SPIS, SPIM, UART;			
Features	SIMIF smart card interfaces;			
Embedded crystals	32M+32K+40M	32M+32K+40M	32M+32K+40M	
GPIO, pins	64			
Antenna	Pads/Pads	Chip/Chip	u.FL/u.FL	U.FL/Chip
Range, 1Mbps				
Max TX, SoC	+10 dBm	10 dBm	+10 dBm	
Receiver sensitivity, at 1Mbps	-100 dBm	-100 dBm	-100 dBm	
Operating temp.	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	
peak current RX				
Certifications				
Eval board				
1K price, ea.				
Availability, samples	Q1, 2026	Q1, 2026	Q1, 2026	Q1, 2026

nRF54L15 BLE 6.0, 802.15.4 and WiFi 6 Combo Modules



- nRF54L15 has more flash memories, higher processor speed, better receiver sensitivity, lower power consumption, and better security supports than nRF52840.
- BM15C is footprint upgradeable to BMH20C (nRF54H20).
- BM15C Series modules are certified for both Bluetooth and 802.15.4.
- BM05M, an nRF54L05 module, has less memories at lower cost.

Nordic nRF54L15 Bluetooth 6.0 Modules.

Nordic nRF54L15 Bluetooth 6.0 Modules.					
Module	BM15C	BM15E	BM15M	BM05M	BM05F
Size, mm	10x15.8	10x15.0	10x14	10.0 x 14.0	
SoC features	nRF54L15, Cortex M33 at 128MHz; 1524KB flash, 256 KB RAM			nRF54L05,Cortex M33,128MHz;500KB flash,96KB RAM	
Features	Max. TX power, + 8 dBm; Receiver sensitivity, -98 dBm; PSA level 3 security; NFC; directional finding.				
GPIOs	45 LGA pins, 32 GPIOs				
Embedded crystals	32M	32M	32M	32M	32M
Antenna	High perform. chip	u.FL	PCB Trace	PCB Trace	High perform. PCB
BLE Range,1Mbps/125Kbps	1000/2500 meters, est.		400/1000 meters, est.		
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
peak current RX					
Certifications	BLE + 802.15.4; FCC,ISED,CE,UK,RCM,TELEC,NCC			BLE; FCC,ISED,CE,UK,RCM,TELEC,NCC	
Eval board	EV-BM15C	EV-BM15E	EV-BM15M	EV-BM05M	EV-BM15F
1K price, ea.	\$3.91	\$3.55	\$3.21	\$2.86	\$3.49
Availability	Production	Production	Production	Q3, 2025	Q3, 2025

Nordic nRF54L15 Compact Bluetooth 6.0 Modules. No external component required.

Module	BC15C	BC15E	BC15M	BC15P
Size, mm	6.0x11.0	6.0x10.5	6.0x9.6	6.0x6.3
SoC features	nRF54L15, Cortex M33 at 128MHz; 1524KB flash, 256 KB RAM			
Features	Max. TX power, + 8 dBm; Receiver sensitivity, -98 dBm; PSA level 3 security; NFC; directional finding			
GPIOs	30 GPIOs; 36 LGA pins			
Embedded crystals	32M+32K	32M+32K	32M+32K	32M+32K
Antenna	High performance chip	u.FL	PCB trace	Pads
Range, 1Mbps (2 ways)	90 meters		100 meters	400 M, est.
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
Certifications	BLE + 802.15.4; FCC, ISED, CE, UK, RCM, TELEC, NCC			
Eval board	EV-BC15C	EV-BC15E	EV-BC15M	EV-BC15P
1K price, ea.	\$4.70	\$4.27	\$4.32	\$4.11
Availability	Q3, 2025	Q3, 2025	Q3, 2025	Q3, 2025

Dual Band WiFi 6 and BLE 5.4/WiFi 6 Combo Modules



Nordic nRF7002 supports IEEE 802.11 a/b/g/n/ac/ax in both 2.4 GHz and 5 GHz frequency bands.

- Combo module integrates an nRF5340 to support 4 radio interfaces, 5GHz WiFi 6, 2.4 GHz WiFi 6, BLE, and 802.15.4.
- WT02C40C, WT02E40E, WT02E40C are footprint upgradeable from BLE modules BT40F and BT40N.
- Companion module WM02C and WM02E are managed by a host MCU through SPI interface.

- For low cost applications, uses a BM15M@\$3.21, or a BT40@\$7.65 each at 1K pcs.
- For long range applications, use a BT40N with an nRF21540, \$10.92 each at 1K pcs.
- WiFi ranges are the average of 12 measurements with an iPhone 14. Module antenna points to the sky and is rotated by 30 degrees after each measurement.
- WM Series WiFi ranges are measured with Nordic SDK 2.50, default settings.

Nordic nRF7002 WiFi 6 Companion Modules. No external component required.

module	WM02C	WM02V	WM02E	WM02F	WM02P
Size, mm	12.0x19.1x2.0	12.0x25.3x2.0	12x16.8	12.0 (15.1) x 24..3	12.0x12.9x2.0
SoC	nRF7002	nRF7002	nRF7002	nRF7002	nRF7002
Antenna	Chip, horizontal	Chip, vertical	u.FL	High performance PCB	Pads
2.4GHzWiFi range	549 meters	505 meters	550 meters	493 meters	
5GHz WiFi range	413 meters	498 meters	510 meters	375 meters	
Carrier frequency	Trimmed to +/- 2 ppm in the 5GHz band				
Operating temp.	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Certifications	WiFi 2.4 GHz + 5GHz; FCC, ISCED, CE, UK, TELEC, RCM, NCC				
Eval board	EV-WM02C	EV-WM02V	EV-WM02E	EV-WM02F	EV-WM02P
1K price, ea.	\$4.74	\$4.74	\$4.30	\$4.20	\$4.13
Reel size, pcs	1000	1000	1000	1000	1000
Availability	Production	2025	Production	Production	Production

Nordic nRF7002 WiFi 6 and nRF5340 BLE 5.4 Combo Modules. No external component required.

module	WT02E40E	WT02C40C	WT02V40V	WT02E40C	WT02P40P
W(antenna)xHxT, mm	14.0(15.5)x23.0x2.0	14.0(25.0)x24.8x2.0	14.0(16.4)x30.5x2.0	14.0(15.5)x24.5x2.0	14(14)x18.5x2.0
SoC	nRF5340+7002	nRF5340+7002	nRF5340+7002	nRF5340+7002	nRF5340+7002
MCU/Flash/RAM	M33/256/64KB	M33/256/64KB	M33/256/64KB	M33/256/64KB	M33/256/64KB
MCU 2/Flash/RAM	M33/1024/512KB		M33/1024/512KB	M33/1024/512KB	M33/1024/512KB
NFC,802.15.4,USB,CryptoCell	Yes	M33/1024/512KB	Yes	Yes	Yes
GPIO pins	48, LGA	48, LGA	48, LGA/CAS	48, LGA/CAS	48, LGA/CAS
WiFi 6 frequencies	2.4GHz+5 GHz	2.4GHz+5 GHz	2.4GHz+5 GHz	2.4GHz+5 GHz	2.4GHz+5 GHz
Antenna, WiFi/BLE	u.FL/u.FL	Chip/Chip, Horizontal	Chip/Chip, Vertical	u.FL/Chip	Pads/Pads
2.4 GHz WiFi range					
5GHz WiFi range					
BLE range at 1Mbps					
Operating temp.	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
DCDC inductors, power switch	Integrated	Integrated	Integrated	Integrated	Integrated
Crystals	32M+32K+40M	32M+32K+40M	32M+32K+40M	32M+32K+40M	32M+32K+40M
Certifications	BLE + 802.15.4 + WiFi 2.4 GHz + 5 GHz; FCC, ISCED, CE, UK, TELEC, RCM, NCC				
Eval board	EV-WT02E40E	EV-WT02C40C	EV-WT02V40V	EV-WT02E40C	EV-WT02P40P
1K price, ea.	\$10.86	\$11.66	\$11.66	\$11.09	\$10.60
Reel size, pcs	1000	500	500	1000	1000
Availability	Production	Production	Production	Production	Production

nRF5340 BLE 5.4 Modules



- No external component required. It uses minimum host PCB area. Both 32 MHz and 32.768 kHz crystals embedded. DCDC converter inductors are embedded.
- Compact nRF5340 modules: [BC40C](#), [BC40M](#), [BC40P](#);
- Long Range nRF5340 modules: [BT40](#), [BT40F](#), [BT40E](#), BLE and 802.15.4 certified.
- nRF5340 with nRF21540 power amplifier: BT40N, BT40NE, BLE and 802.15.4 certified.
- **AP**protect: All nRF5340 modules support appprotect.

Nordic nRF53 Bluetooth 5.3 Modules. No external component required. Certified for both BLE and 802.15.4.

Module	BT40	BT40F	BT40E	BT40N	BT40NE
AP protect	BT40	BT40F	BT40E	BT40N	BT40NE
Size, mm	14x16x2.0	15x21x2.0	14x16x2.0	15x29.9x2.0	15x29.9x2.0
SoC	nRF5340	nRF5340	nRF5340	nRF5340+21540	nRF5340+21540
MCU/Flash/RAM	M33/256/64KB	M33/256/64KB	M33/256/64KB	M33/256/64KB	M33/256/64KB
MCU 2/Flash/RAM	M33/1024/512KB	M33/1024/512KB	M33/1024/512KB	M33/1024/512KB	M33/1024/512KB
NFC,802.15.4,USB	Yes	Yes	Yes	Yes	Yes
Directional Finding	Yes	Yes	Yes	Yes	Yes
CryptoCell-312	Yes	Yes	Yes	Yes	Yes
GPIO, pins	48, LGA/CAS	48, LGA/CAS	48, LGA/CAS	48, LGA/CAS	48, LGA/CAS
Antenna	PCB Trace/u.FL	High Perf. Trace	PCB Trace/u.FL	PA+PCB	PA+PCB+u.FL
Range,1Mbps	100 M, est.	700 meters, est.	1000 M, est.	>1100 meters	>1100 meters
Max TX, conducted, FCC	+3.4 dBm	+3.4 dBm	+3.4 dBm	+19.1 dBm	+19.1 dBm
Max TX, radiated, FCC	0 dBm	+4.3 dBm	+9.4 dBm	+20.0 dBm	+25.1 dBm
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
peak current RX	2.6 mA	2.6 mA	2.6 mA		
peak current TX	3.2 mA, 0dBm	3.2 mA, 0 dBm	3.2 mA, 0dBm		
DCDC inductors VDD,VDDH	Integrated	Integrated	Integrated	Integrated	Integrated
32.768kHz crystal	Integrated	Integrated	Integrated	Integrated	Integrated
Certifications	FCC, ISED, CE, RCM, TELEC (BLE+ 802.15.4), QDID			FCC, ISED, CE, RCM, TELEC (BLE+ 802.15.4), QDID	
Eval board	EV-BT40	EV-BT40F	EV-BT40E	EV-BT40NE	EV-BT40NE
1K price, ea.	\$7.65	\$9.02	\$8.68	\$10.92	\$12.24
Availability	Production	Production	Production	Production	Production

Nordic compact nRF53 Bluetooth 5.3 Modules. No external component required.

Module	BC40C	BC40M	BC40P
AP protect	BT40C	BC40M	BC40P
Size, mm	8.4x11.5x1.6	8.4(10.1)x12.7x1.6	8.4x9x1.6
SoC	nRF5340	nRF5340	nRF5340
MCU/Flash/RAM	M33/256/64KB	M33/256/64KB	M33/256/64KB
MCU 2/Flash/RAM	M33/1024/512KB	M33/1024/512KB	M33/1024/512KB
NFC,802.15.4,USB	Yes	Yes	Yes
Directional Finding	Yes	Yes	Yes
CryptoCell-312	Yes	Yes	Yes
GPIO pins	48, LGA	48, LGA	48, LGA
Antenna	Chip	PCB	Pads for external
Range,1Mbps			
Max. TX power, FCC	+3.60 dBm	+3.60 dBm	+3.60 dBm
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C
peak current RX	2.6 mA	2.6 mA	2.6 mA
peak current TX	3.2mA, +0dBm	3.2mA, +0dBm	3.2mA, +0dBm
DCDC inductors VDD,VDDH	Integrated	Integrated	Integrated
32.768kHz crystal	Integrated	Integrated	Integrated
Certifications	FCC, IC, CE, JPAU, QDID	FCC, IC, CE, JPAU, QDID	FCC, IC, CE, JPAU, QDID
Eval board	EV-BC40C	EV-BC40M	EV-BC40P
1K price, ea.	\$10.10	\$9.02	\$8.97
Availability	Production	Production	Production

The operating temperature of nRF52833 QIAA is specified at -40°C to +105°C. BM833F-T and BM833P-T use crystal and RF components with -40°C to +125°C operating temperature. Bluetooth carrier frequencies are measured to be within specifications (+/- 50 ppm) from -40°C to +125°C. Bluetooth data transmission and reception are also verified.

However, BM833F-T and BM833P-T are not certified for automobile applications.

Nordic nRF52 BM Series, Low Cost, Compatible Footprint

Modules	BM833	BM833E	BM833F	BM833F-T	BM833P-T
APprotect	BM833-p	BM833E-p		BM833F-T	BM833P-T
Sizes, mm	10.2x15x1.9	10.2x15x1.9	15x20.6x1.9	15x20.6x1.9	10.2x11.0x1.9
SoC	nRF52833	nRF52833	nRF52833	nRF52833	nRF52833
Flash/RAM	512KB/128KB	512KB/128KB	512KB/128KB	512KB/128KB	512KB/128KB
NFC/IEEE 802.15.4	Yes	Yes	Yes	Yes	Yes
GPIO pins	42	42	42	42	42
Pins	LGA	LGA	LGA	LGA	LGA
Antenna	PCB	u.FL	PCB Trace	PCB trace	pads
Range, 125kbps		3400M, est.	2300M, est.	2300M, est.	
Max. TX power, FCC	+8.13 dBm	+8.13 dBm	+8.13 dBm	+8.43 dBm	+8.43 dBm
peak current RX	4.6mA	4.6mA	4.6mA	4.6 mA	4.6 mA
peak current TX	4.8mA, +0dBm	4.8mA, +0dBm	4.8 mA, +0 dBm	4.8 mA at +0dBm	4.8 mA at +0dBm
DCDC inductors	Integrated	Integrated	Integrated	Integrated	Integrated
Operating temp.	-40°C to +105°C	-40°C to +105°C	-40°C to +105°C	-40°C to +125°C	-40°C to +125°C
32.768kHz crystal	Ext.	Ext.	Ext.	Ext	Ext
Certifications	FCC, IC, CE, JPAU, NCC, QDID, SAR	FCC, IC, CE, JPAU, NCC, QDID	FCC, IC, CE, JPAU, NCC, QDID	FCC, IC, CE, JPAU, NCC, QDID	FCC, IC, CE, JPAU, NCC, QDID
Eval board	EV-BM833	EV-BM833E	EV-BM833F	EV-BM833F	EV-BM840P-T
1K price, ea.	\$4.80	\$5.73	\$5.77	\$5.95	\$5.83
Availability	Production	Production	Production	Production	Production

Modules	BM833A	BM833AF	BM832A	BM832	BM832E
APprotect	BM833A	BM833AF	BM832A-p	BM832-p	BM832E-p
Sizes, mm	10.2x15x1.9	15x20.8x1.9	10.2x15x1.9	10.2x15x1.9	10.2x15x1.9
SoC	nRF52811	nRF52811	nRF52810	nRF52832	nRF52832
Flash/RAM	192KB/24KB	192KB/24KB	192KB/24KB	512KB/64KB	512KB/64KB
NFC/802.15.4	No	No	No	Yes	Yes
GPIO pins	32	32	32	32	32
Pins	LGA	LGA	47, LGA	47, LGA	47, LGA
Antenna	PCB Trace	PCB Trace	PCB trace	PCB trace	PCB u.FL
Range,125kbps	680M, est.	1400M, est.	340 meters	340 meters	
Ant at 1.52 m			270 meters	270 meters	
Max. TX power, FCC	+4.77 dBm	+4.77 dBm	+3.98 dBm	+3.98 dBm	+3.98 dBm
peak current RX	4.6mA	4.6mA	5.4 mA	5.4 mA	5.4 mA
peak current TX	4.6mA, +0dBm	4.6mA, +0dBm	7.5mA, +4dBm	7.5mA, +4dBm	7.5mA, +4dBm
DCDC inductors	Integrated	Integrated	Integrated	Integrated	Integrated
32.768kHz crystal	Ext.	Ext.	Ext.	Ext.	Ext.
Certifications	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,KR,QDID,SAR	FCC,IC,CE,JPAU,KR,QDID,SAR	FCC,IC,CE,JPAU,KR,QDID,SAR
Eval board	EV-BM833A	EV-BM833AF	EV-BM832A	EV-BM832	EV-BM832E
1K price, ea.	\$3.32	\$3.67	\$3.00	\$3.92	\$4.08
Availability	Production	Production	Production	Production	Production

Modules	BM840	BM840P
APprotect	BM840	BM840P
Sizes, mm	10.2x15x1.9	10.2x15x1.9
SoC	nRF52840	nRF52840
Flash/RAM	1MB/256KB	1MB/256KB
NFC/IEEE 802.15.4	Yes	Yes
GPIO pins	30	30
Pins	LGA	LGA
Antenna	PCB trace	pads
Max. TX power, FCC	+8.0 dBm	+8.0 dBm
peak current RX	4.6 mA	4.6 mA
peak current TX	4.8 mA at +0dBm	4.8 mA at +0dBm
DCDC inductors	Integrated	Integrated
32.768kHz crystal	Ext	Ext
Certifications	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,QDID
Eval board	EV-BM840	EV-BM840P
1K price, ea.	\$4.76	\$4.76
Availability	Production	Production

[illegible]

nRF52 BT Series, Long Range, Full Size with nRF21540 Modules



BT Series modules are full size with Bluetooth range up to 4500 meters. All BT modules have compatible footprint. An nRF52 module can be upgraded to an nRF53 module with a power amplifier or a BLE 5.3-WiFi 6 combo. BT modules are widely used in Fanstel pre-certified, market ready M.2 modules, basic, battery-powered, and PoE gateways.

- **M.2 modules:** nRF9160 + BT840F: [LN60E840F](#).
- **IP67 Battery-powered BLE-LTE-LoRa gateways** [SL40F6](#).

- **Medical IoT gateways:** [BLG840FB4](#).
- **IP65 BLE-LoRa to LTE, WiFi, PoE gateways** [LEWR840F6P](#).
- **BLE to WiFi 6 matter gateways:** BWG02C40F.
- Certified for both BLE and Thread, BT840F and BT840N Series are ready for Matter applications.

Nordic nRF52 BT Series, compatible footprint, upgradeable features and range

BLE 5 modules	BT832	BT832F	BT832A	BT832AF
APprotect	BT832-p	BT832F-p	BT832A-p	BT832AF-p
Sizes, mm	14x16x1.9	15x20.8x1.9	14x16x1.9	15x20.8x1.9
SoC	nRF52832	nRF52832	nRF52810	nRF52810
Flash/RAM	512KB/64KB	512KB/64KB	192KB/24KB	192KB/24KB
NFC	Yes	Yes	No	No
GPIO pins	32	32	32	32
Pins	40, CAS/LGA	40, CAS/LGA	40, CAS/LGA	40, CAS/LGA
Antenna	PCB trace	PCB trace	PCB trace	PCB trace
Range, 1 Mbps	100 meters	760 meters	100 meters	760 meters
Ant. at, 1.52m		390 meters		390 meters
Max. TX power, FCC	+2.55 dBm	+2.55 dBm	+2.55 dBm	+2.55 dBm
peak current RX	5.4 mA	5.4 mA	5.4 mA	5.4 mA
peak current TX	7.5mA, +4dBm	7.5mA, +4dBm	7.5mA, +4dBm	7.5mA, +4dBm
DCDC inductors	Integrated	Integrated	Integrated	Integrated
32.768kHz crystal	Ext.	Ext.	Ext.	Ext.
Certifications	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,QDID	FCC,IC,CE,JPAU,QDID
Eval board	EV-BT832	EV-BT832F	EV-BT832A	EV-BT832AF
1K price, ea.	\$4.46	\$4.93	\$3.43	\$3.79
Availability	Production	Production	Production	Production

Nordic nRF52 BT Series, compatible footprint, upgradeable features and range. Certified for BLE and 802.15.4.

BLE 5 modules	BT840F	BT840	BT840E	BT840N	BT840NE
APprotect	BT840F-p	BT840-p	BT840E-p	BT840N	BT840NE
Sizes, mm	15x20.8x1.9	14x16x1.9	14x16x1.9	15x29.9x1.9	15x29.9x1.9
SoC	nRF52840	nRF52840	nRF52840	nRF52840+21540	nRF52840+21540
MCU/flash/RAM	M4F/1MB/256KB	M4F/1MB/256KB	M4F/1MB/256KB	M4F/1MB/256KB	M4F/1MB/256KB
CryptoCell 310	Yes	Yes	Yes	Yes	Yes
IEEE 802.15.4,USB,NFC	Yes	Yes	Yes	Yes	Yes
GPIO pins	48	48	48	39	39
Pins	61, CAS/LGA	61, CAS/LGA	61, CAS/LGA	61, CAS/LGA	61, CAS/LGA
Antenna	PCB trace	PCB trace	u.FL	PA + PCB	PA + PCB+u.FL
Range, 1 Mbps	1000 meters	150 meters	>1000 meters, est.	1170 meters	>1100 meters, est.
Ant. at, 1.52m	390 meters	120 meters			
Range,125Kbps	2300 meters	320 meters	>2300 meters, est.	>4500 M, est.	>4500 M, est.
Ant at 1.52m	640 meters	210 meters			
Max. TX power, conducted	+8.49 dBm	+8.49 dBm	+8.49 dBm	+20.6 dBm	+20.6 dBm
Max. TX power, radiated	+9.4 dBm	+5.0 dBm	+14.5 dBm	+21.5 dBm	+26.6 dBm
peak current RX	4.6 mA	4.6 mA	4.6 mA		
peak current TX	13.6mA +8dBm	13.6mA +8dBm	13.6mA +8dBm		
DCDC inductors	Integrated	Integrated	Integrated	Integrated	Integrated
32.768kHz crystal	Ext.	Ext.	Ext.	Integrated	Integrated
Certifications	FCC,ISED,CE,RCM,TELEC (BLE+ 802.15.4), KCC, NCC, Anatel, QDID			FCC,ISED,CE,RCM,TELEC (BLE+ 802.15.4), QDID	
Eval board	EV-BT840F	EV-BT840	EV-BT840E	EV-BT840NE	EV-BT840NE
1K price, ea.	\$7.17	\$6.09	\$6.90	\$8.81	\$9.91
Availability	Production	Production	Production	Production	Production

Modules with Skyworks PA, Semtech LoRa



Modules with Skyworks PA

- nRF52832, nRF52840 with Skyworks power amplifier.

- LR62C: With a chip antenna and TCXO for better temperature stability.
- LR62XE**, SX1262 + PA, max. TX: +29.2 dBm.

Semtech LoRa Module

- LR62E**: SX1262 LoRa module with an u.FL.

Nordic nRF52 BT Series, compatible footprint, upgradeable features and range

BLE 5 modules	BT832X	BT832XE	BT840X	BT840XE
APprotect	BT832X-p	BT832XE-p	BT840X-p	BT840XE-p
Sizes, mm	15x28x1.9	15x28x1.9	15x28x1.9	15x28x1.9
SoC	nRF52832+SKY66112	nRF52832+SKY66112	nRF52840+SKY66112	nRF52840+SKY66112
Flash	512KB	512KB	1MB	1MB
RAM	64KB	64KB	256KB	256KB
CryptoCell 310			Yes	Yes
IEEE 802.15.4, USB			Yes	Yes
NFC	Yes	Yes	Yes	Yes
GPIO pins	29	29	45	45
Pins	40, CAS/LGA	40, CAS/LGA	61, CAS/LGA	61, CAS/LGA
Antenna	PCB trace	u.FL	PCB Trace	u.FL
Range, 1 Mbps	1140 meters	1140 meters	1170 meters	1170 meters
Ant. at, 1.52m	1120 meters	1120 meters	900 meters	900 meters
Range, 125Kbps			>4500 M	>4500 M
Ant at 1.52m			1240 meters	>1240M
Max. TX power, conducted	+18.75 dBm	+18.75 dBm	+21.0 dBm	+21 dBm
Max.TX power, radiated		+24.75 dBm		+27 dBm
peak current RX				
peak current TX	95mA,+20dBm	95mA,+20dBm		
DCDC inductors	Integrated	Integrated	Integrated	Integrated
32.768kHz crystal	Integrated	Integrated	Integrated	Integrated
Certifications	FCC,IC,QDID	FCC,IC,QDID	FCC,IC,CE,AU,QDID	FCC,IC,CE,AU,QDID
Eval board	EV-BT832X	EV-BT832XE	EV-BT840X	EV-BT840XE
1K price, ea.	\$9.69	\$9.87	\$12.50	\$12.75
Availability	Production	Production	Production	Production

Semtech LoRa Modules


Modules	LR62E	LR62E1	LR62XE	LR62XE1
Sizes, mm	10.2x15x1.9	10.2x15x1.9	10 (14) x22.3	10 (14) x22.3
SoC	SX1262	SX1262	SX1262+SKY65313	
Embedded crystal	32MHz	32MHz TCXO	32MHz	32MHz
Max TX power, conducted	+20.3 dBm	+20.1 dBm	+29.2 dBm	
Max TX power, radiated	+21.8 dBm	+21.4 dBm	+30.7 dBm	
Antenna	u.FL	Chip	u.FL	
Certifications	FCC,ISED,RCM	FCC, ISED	FCC, ISED,RCM	
Operating temp.	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Eval board	EV-LR62E		EV-LN60G	
1K price, ea.	\$7.32	\$8.24	\$13.81	
Availability	Production	Production	Production	

LTE,BLE 6.0,802.15.4,WiFi 6, M.2 Connector, E key



WB02C15C Series: 7-radios combo supporting 5 GHz WiFi 6, 2.4 GHz WiFi 6-BLE 6.0-802.15.4. An nRF54L15 and nRF7002 combo module for M.2 connector, E key.

Coming Soon: 9-radios combo supporting Cat-M, NB-IoT, 5 GHz WiFi 6, 2.4 GHz WiFi 6-BLE 6.0-802.15.4. An nRF9151, nRF54 and nRF7002 combo module for M.2 connector, E key.

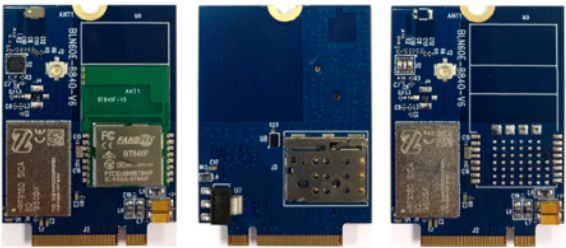

M2 Modules Supporting WiFi 6 and BLE 6.0/802.15.4			
Module	WB02E15E	WB02C15C	WB02E
M.2 size/key	2242/E	2242/E	2242/E
WiFi/BLE/LTE module	WM02E/BM15E	WM02C/BM15C	WM02E
WiFi/BLE/LTE antenna	u.FL/u.FL	Chip/Chip	u.FL
Certifications			
QDID			
1K price, each			
Availability			

LN60E840F Series LTE-BLE/802.15.4 Combo Modules

nRF52840 or nRF5340 module integrated with nRF9160 module. Bluetooth range can be > 4500 meters or 2.8 miles. An u.FL connector for external LTE antenna. A nano SIM card connector on board and SIM interface for external eSIM. GPS with integrated antenna and receiver amplifier, or an u.FL for external GPS antenna.


LW51E02E40E Series: 8-radios combo supporting Cat-M, NB-IoT, 5 GHz WiFi 6, 2.4 GHz WiFi 6-BLE 6.0-802.15.4. An nRF9151, nRF54L15 and nRF7002 combo module.

M262X840XE Series LoRa-BLE 5 Combo Module

nRF52840 and Semtech SX1262 combo module supporting BLE 5.2 and Long Range LoRa.

M.2 Connector

B or E key, 67 pins.

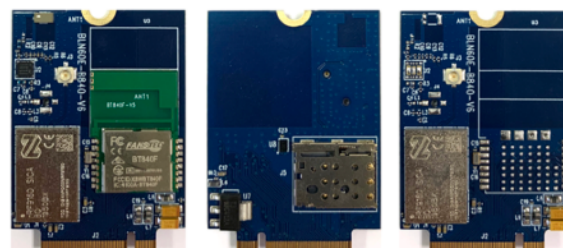

LN Modules Supporting LTE and BLE/802.15.4

Module	LN60E40F	LN60E40NE	LN60E840E	LN60E840F	LN60E840XE	LN60E
M.2 size/key	3042/B	3042/B	3042/B	3042/B	3042/B	3042/B
BLE module	BT40F	BT40NE	BT840E	BT840F	BT840XE	
BLE antenna	Integrated	u.FL+PCB+PA	u.FL	Integrated	PA + u.FL	
BLE TX power	+3.4 dBm		+8.5 dBm	+8.5 dBm	+21.0 dBm	
LTE module	nRF9160 SICA	nRF9160 SICA	nRF9160 SICA	nRF9160 SICA	nRF9160 SICA	nRF9160 SICA
LTE antenna	u.FL	u.FL	u.FL	u.FL	u.FL	u.FL
GPS antenna	u.FL	u.FL	u.FL	u.FL	u.FL	u.FL
Flash memory	16MB	16MB	None	None	None	None
Certifications	FCC,IC,TELEC (CE,RCM)		FCC,IC,TELEC (CE,RCM)	FCC,IC,TELEC (CE,RCM)	FCC,IC,(CE,RCM)	FCC,IC,TELEC (CE,RCM)
QDID	119517		108621	108621	108621	
1K price, each	\$49.48		\$40.56	\$40.56	\$57.11	\$32.75
Availability	Production		Production	Production	Production	Production


M2 Module Supporting BLE/802.15.4-LoRa

Module	M262840F	M262X840XE	M2840XE	M240E	M262X840F
M.2 size/key	3042/B	3042/B	3042/B	3042/B	3042/B
BLE module/TX	BT840F/+8.5dBm	BT840XE/+21dBm	BT840XE/+21dBm	BT40E	BT840F/+8.5dBm
BLE antenna	Integrated	PA + u.FL	PA + u.FL	u.FL	Integrated
LoRa module/TX	LR62E/+20.3dBm	LR62XE/+29.2dBm			LR62XE/+29.2dBm
LoRa antenna	u.FL	u.FL			u.FL
Certifications	FCC,IC,RCM	FCC,IC,RCM	FCC,IC,CE,RCM	FCC,IC,CE,RCM,TELEC	FCC,IC,RCM
QDID	108621	108621	108621	119517	108621
1K price, each	\$19.64	\$44.86			\$32.49
Availability	Production	Production	Non stock	Non stock	Production

BLE 6.0 to WiFi 6/LTE Gateway

Basic Gateways

BLG15C and BWG15C is an upgraded and cost reduced version of BLG840F and BWG840F, respectively. The Bluetooth protocols are upgraded to 6.0. The WiFi protocols are also upgraded to 6. Security is upgraded to PSA level 3. Sample availability is Q4 2025.

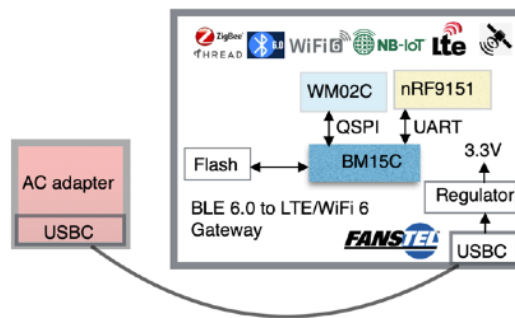


	LTE-BLE 6 gateway	WiFi 6-BLE 6 gateway	LTE-WiFi 6-BLE 6 gateway
Gateway	BLG15C	BWG15C	BLG02C15C
Radios	BLE 6.0/LTE	BLE6.0/WiFi 6	BLE6.0/WiFi 6/LTE
Flash memories	32MB	None	32MB
Max operating temp	-40°C to +80°C	-40°C to +80°C	-40°C to +80°C
Mounting	Wall or desk mount	Wall or desk mount	Wall or desk mount
Certifications			
1K price, each	\$48.93	\$21.62	\$55.35
Availability			

Battery Powered IP67 BLE 5.3,LTE,LoRa Gateway/Sensor

SL60F6 Series IP67 BLE-LTE-LoRa Gateways


This sensor is available in IP67 (yellow) or IP51 (black).

- The battery cartridge can accommodate 4 x AA, 3.6 volts lithium batteries with 30 watts power.

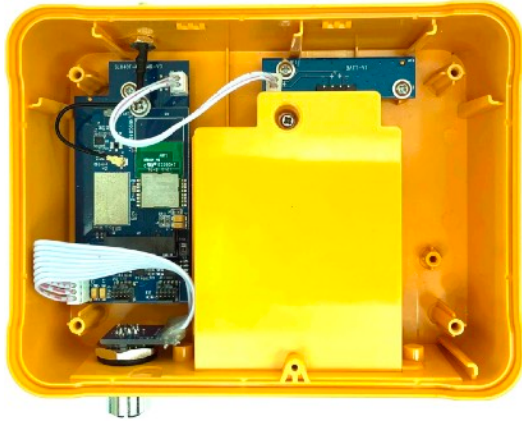

- The IP67 enclosure can have an optional 8-pins, M12 connector for external sensors.
- The IP51 enclosure can have an optional 8-pins RJ45 connector for external sensors.
- The host board has an M.2 connector for an LTE module, a BLE module, an **LN LTE-BLE module** or an **M2 BLE-LoRa module**.
- SL40F6** can be used as a sensor or a battery powered BLE to LTE gateway.

- M12 connector for external sensor
- Use 1 - 4 AA, 3.6V Lithium batteries. Max. 30 Amp-

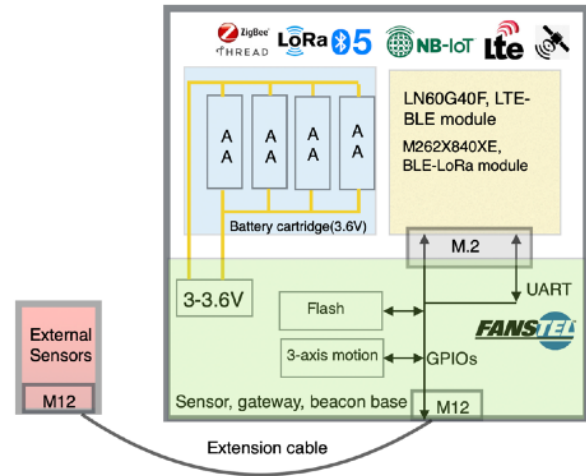

hours.

	LTE-BLE gateway	LTE-BLE gateway	LTE-BLE gateway	LoRa-BLE bridge	LTE-GPS beacon
	SL840F5R	SL40E6M	SL40F6N	SR840F6N	SLG6N
Ingress Protect/Color	IP51/black	IP67/yellow	IP67/yellow	IP67/yellow	IP67/yellow
Radios	BLE5.3	BLE5.3,LTE	BLE5.3,LTE	BLE5.3,LoRa	LTE
LN, M2 module	LN60E840F	LN60E40E	LN60E40F	M262840F	LN60G1
Sensors	LIS3DH, 3-axis motion	LIS3DH, 3-axis motion	LIS3DH, 3-axis motion	LIS3DH, 3-axis motion	LIS3DH, 3-axis motion
External antenna	0	1	0	1	0
Ext.sensor conn.	RJ45	M12	None	None	None
Power, not included	4AA, 3.6V Lithium	4AA, 3.6V Lithium	4AA, 3.6V Lithium	4AA, 3.6V Lithium	4AA, 3.6V Lithium
Max operating temp	-40°C to +80°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Mounting	Wall or pole mount	Wall or pole mount	Wall or pole mount	Wall or pole mount	Wall or pole mount
Certifications					
1K price, each	\$79.29	\$105.78	\$86.81	\$53.20	
Availability	Samples	Samples	Samples		

IP67 Industrial Multiple Network Gateways

- Basic edge computing industrial IoT gateways: IP67/ IP65 **LEW40E6P** (PoE), or IP51 LEW40E5P (PoE). BLE, 802.15.4 to LTE, WiFi, PoE gateways with dual core Cortex M33 processors up to 128 MHz. The PoE




gateway enclosure is IP67 rated. A silicone shield for the cable RJ45 plug is required for IP67 rated gateway.

IP51 Industrial Multiple Network Gateways

- Basic Bluetooth to WiFi, Ethernet gateway: **EW840F5P** (PoE) or EW840F5N (Non-PoE). IP51 for indoor applications.
- Multiple radio protocols, BLE/IEEE 802.15.4, LoRa to WiFi, Ethernet, LTE gateway: **LEWR840E5P**.

OpenSource Supports

- Mongoose OS** OpenSource codes for connecting to **Fanstel, AWS, MicroSoft, or Google Cloud platforms.**
- Firmware for BLE, WiFi, LTE modules.
- Android OS apps.
- Link to download document and source codes:
<http://www.fanstel.com/download-opensource/>

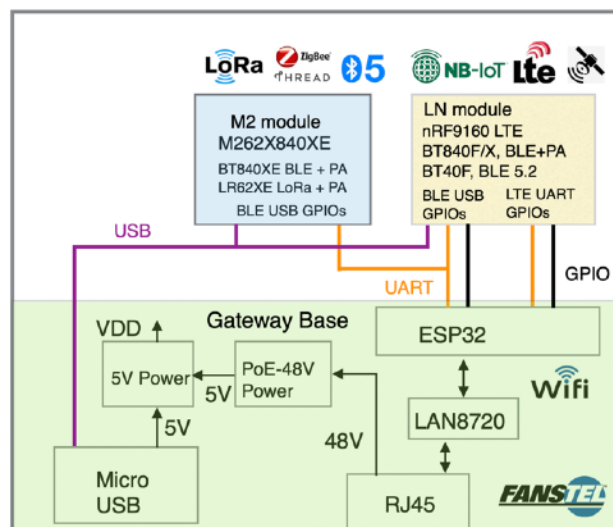

MultiNetwork, MultiProtocol Gateways with Ingress Protection

Ingress protect/color	IP51/black	IP51/black	IP51/black	IP51/black	IP65/yellow	IP65/yellow
Gateway	EW840F5N	EW840F5P	LEWR840E5P	LEW40E5P	LEW40F6P	LEWRX840XE6P
WiFi/Ethernet	ESP32M16	ESP32M16	ESP32M16	ESP32M16	ESP32M16	ESP32M16
LN Module			LN60E	LN60E40E	LN60E40F	
M2 Module	M2840F	M2840F	M262840E			
External antenna	0	0	3	2	0	3
GPS				Need ext. antenna	Need ext. antenna	
Power supply	AC adapter	PoE	PoE	PoE	PoE	PoE
Operating temp.	0°C to +40°C	-40°C to +80°C	-40°C to +80°C	-40°C to +80°C	-40°C to +85°C	-40°C to +85°C
Certifications						
QDID	108621	108621	108621	119517	119517	108621
1K price, each	\$61.35	\$66.51	\$117.00	\$109.89	\$130.39	\$161.14
Programming Kit	PK-LEW840X	PK-LEW840X	PK-LEW840X	PK-LEW840X	PK-LEW840X	PK-LEW840X
Availability	Production	Production	Production	Production	Production	Production

FANSTEL™
Since 1990


Remote Dongle

Open Source Medical and Matter IoT Gateways

Optimized for Remote Patient Monitoring

Features for remote patient monitoring:

- Flash memory to store patient data and forward to cloud upon LTE reconnection.
- A buzzer for audio alerting and a control button.

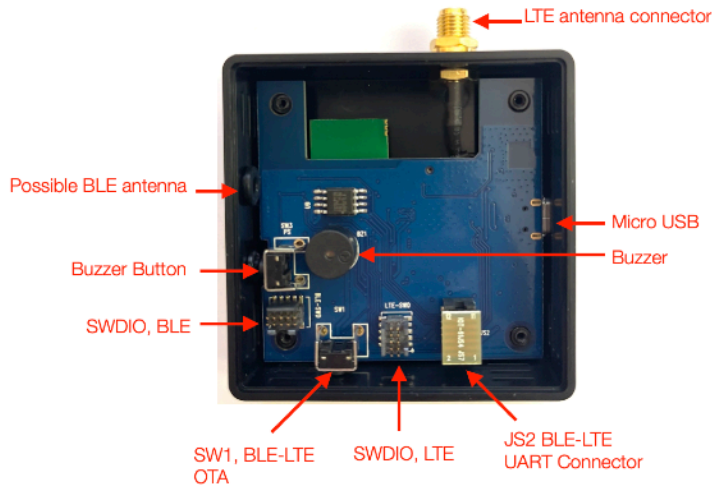

- **BLG40FB16** Edge computing medical IoT gateway with dual core Cortex M33 up to 128MHz, 16 MB flash memory for local storage..

BLE 5.3/Thread to WiFi 6 Gateways

- **MIG02C40F**, WiFi 6 to BLE 5.3/Thread gateway for Matter applications, 4MB flash for local storage.
- **MIG02V40NE**, a PA and external antennas for long range BLE 5.3/Thread to long range WiFi 6 gateway for Matter applications, 16MB flash for local storage.
- **MIG02C840F**, Low cost WiFi 6 to BLE 5.3/Thread gateways, 4MB flash for local storage. Not recommended for Matter applications.

OpenSource Supports

- OpenSource codes for connecting to **Fanstel**, **AWS**, **MicroSoft**, or **Google Cloud** platforms.
- Firmware for BLE, WiFi, LTE modules.
- Android OS apps.
- Link to download document and source codes:
<http://www.fanstel.com/download-opensource/>

Bluetooth to LTE Gateways

- **BLG840FB4, BLG840FB16**, Basic LTE-M/NB-IoT to BLE 5.3/802.15.4 gateways with 4MB or 16MB flash for local storage.

Medical IoT Gateway for Remote Patient Monitoring, Bluetooth to LTE			
	BLG840FB4	BLG840FB16	BLG40FB16
LTE module	nRF9160 SICA	nRF9160 SICA	nRF9160 SICA
BLE module/TX power	BT840F/+8.5 dBm	BT840F/+8.5dBm	BT40F/+3.4 dBm
Ext. flash memory	4MB	16MB	16MB
Certifications	FCC, ISSED	FCC, ISSED	FCC, ISSED
QDID	108621, 182626	108621, 182626	119517, 182626
1K price, each	\$63.98	\$65.98	\$70.53
Programming Kit	PK-BLG840F	PK-BLG840F	PK-BLG840F
Availability	Production	Non stock	Production

	Matter IoT Gateway	Long Range Matter Application	LE Audio Broadcasting	BLE to WiFi 6 gateway
	MIG02C40F	MIG02V40NE	BU40NE	MIG02C840F
WiFi 6 module	WM02C, 2.4GHz + 5 GHz	WM02V, 2.4GHz+5GHz	None	WM02C, 2.4GHz+5GHz
BLE/TX power/External antenna	BT40F/+3.4 dBm	BT40NE/+19.1 dBm/ANT000	BT40NE/+19.1 dBm/ANT000	BT840F/+8.5 dBm
Ext. flash memory	4MB	16MB	0	0
Certifications				
QDID				
1K price, each	\$28.93	\$40.15	\$31.14	\$25.34
Programming Kit				
Availability	samples			

OpenSource BLE 5.3-LoRa Sensors/Beacons/Dongles



SE Series BLE 5, LoRa Sensors

- **SE832AF-210, SE840F-210, SE840X-210**: BLE temperature, humidity sensors.
- **SE6233**: BLE-LoRa temperature, humidity, motion sensor.

SC Series BLE 5.3 Compact Sensor, Beacon

- Preloaded with iBeacon and Eddystone codes
- **SC833AF** beacon.
- **SC833F** temperature, humidity, motion sensors

nRF52840 USB Dongles

- Preloaded with Nordic USB CDC ACM secure DFU boot loader, USB dongle can be booted and firmware updated from a PC.
- **USB840F and USB840X** have pads for Tag-Connect cable TC2050-IDC-NL-050-ALL for programming nRF52840.
- Use USB840F to develop codes for **USB840M**.
- USB840F and USB840X with vertical antenna for near omni-directional range coverage.

- **BU840XE** remote dongle includes a 2-meters long USB cable, a wall mount bracket, an external antenna to maximize range by wall mounting to reduce obstruction.

nRF5340 USB Dongles

- Preloaded with Nordic USB CDC ACM secure DFU boot loader, USB dongle can be booted and firmware updated from a PC.
- **USB40F and USB40N** have pads for Tag-Connect cable TC2050-IDC-NL-050-ALL for programming nRF5340.
- USB40F and USB40N with vertical antenna for near omni-directional range coverage.
- **BU40NE** remote dongle includes a 2-meters long USB cable, a wall mount bracket, an external antenna to maximize range by wall mounting to reduce obstruction.

Wireless Sensor/Beacon, no Ingress Protection.							
	SE832AF-210	SE840F-210	SE840X-210	SC805M	SC833AF	SC833F	SE6233
BLE Module	BT832AF	BT840F	BT840X	BC805M	BM833AF, BLE	BM833F, BLE 5.1	LoRa+BLE5.1
Size, mm	60x60x22	60x60x22	60x60x22	30x31x10	30x31x10	30x31x10	60x60x22
Humidity, temp	ENS210	ENS210	ENS210			ENS210	ENS210
Motion sensor						LIS3DH	LIS3DH
Power, not included	2 AAA	2 AAA/micro USB	Micro USB, included	CR2032	CR2032	CR2032	2AAA/micro USB
Mounting	Desk, wall	Desk, wall	Desk, wall	Hook, 2 sided tape	Hook, 2 sided tape	Hook, 2 sided tape	Desk, wall
Certifications	FCC,IC	FCC,IC	FCC,IC				
QDID	97989	108621	108621	138610	138767	138767	138767
1K price, each	\$11.31	\$15.54	\$25.20	\$4.44	\$7.37	\$12.97	\$30.47
Availability	Production	Production	Production	Sample	Sample	Sample	Sample

nRF52840 Bluetooth 5.4 USB Dongle			Remote USB Dongle	
	USB840F	USB840M	USB840X	BU840XE
BLE Module	BT840F	BC840M	BT840X	BT840XE + ANT000
Size	52x21x21mm	26x15x6.0mm	52x21x21mm	60x60x22mm
LED indicators	2	1	2	2
Tag Connect pads	Yes	No	Yes	Connector
Certifications	FCC,IC,CE,RCM,TELEC,QDID	FCC,IC,CE,RCM,TELEC,QDID	FCC,IC,CE,RCM,QDID	FCC,IC,CE,RCM,QDID
1K price, each	\$10.67	\$10.67	\$19.99	\$33.33
Availability	Production	Production	Production	Production

nRF5340 Bluetooth 5.4 USB Dongle			Remote USB Dongle	
	USB40F	USB40N	USB40N	BU40NE
BLE Module	BT40F	BT40N	BT40N	BT40NE + ANT000
Size	52x21x21mm	52x21x21mm	52x21x21mm	60x60x22mm
LED indicators	2	2	2	2
Tag Connect pads	Yes	Yes	Yes	Connector
Certifications	FCC,IC,CE,RCM,TELEC,QDID	FCC,IC,CE,RCM,TELEC,QDID	FCC,IC,CE,RCM,TELEC,QDID	FCC,IC,CE,RCM,TELEC,QDID
1K price, each	\$13.59	\$13.59	\$19.99	\$31.14
Availability	Production	Production	Production	Production

Bluetooth, LoRa, and LTE Antennas

- Most antennas include a 100 mm long u.FL to SMA adapter cable. SMA connector with panel mounting hardware.
- ANT032 uses a P822602, globally certified with nRF9160, includes a 2-sided tape for mounting inside an enclosure.
- ANT032E uses a P822601, globally certified with nRF9160, includes panel mounting hardware .

Panel mountable antenna with 100 mm long SMA to u.FL adapter cable

Antenna	Band	Length	Ingress Protection	Certified with	1K price
ANT000	BLE, 2.4 GHz	50mm	IP67	FCC: BT840XE; CE/RCM/TELEC, BC833E, BM833E, BT840E	\$2.63
ANT020	BLE, 2.4 GHz	30mm		FCC/CE/RCM/TELEC: BM832E	\$2.63
ANT025	LoRa, 915MHz			FCC: LR62E, LR62XE	\$3.68
ANT025P	LoRa, 915MHz	198mm	IP67	FCC: LR62XE	\$3.68
ANT032	LTE, multiple	52mm		Uses a P822601, certified with nRF9160 globally. Glued to internal wall of enclosure.	\$5.03
ANT032E	LTE, multiple	78mm		Uses a P822601, certified with nRF9160 globally. Panel mountable, external antenna	\$7.42
ANT036	WiFi, 2.4G+5G	158.8mm		All: WM02E, WM02P, WT02E40E, WT02E40C, WT02P40P	\$3.68
ANT060	BLE, 2.4 GHz	195mm		FCC: BC833E, BM833E, BT840E, BT832XE. All: BT40E, BC40P	\$3.15
ANT060P	BLE, 2.4 GHz		IP67		\$3.68



Contact Fanstel

Fanstel Corporation | 7466 E. Monte Cristo Ave. Scottsdale, AZ 85260 USA
t: 1 480.948.4928 | e: info@fanstel.com | w: <http://www.fanstel.com>

