

BLM18TG601TN1#

“#” at the end indicates the package specification code.

● Discontinued

BLM18TG601TN1#

“#” at the end indicates the package specification code.



BLM18TG601TN1B, BLM18TG601TN1D

Last Time Order Due	End of Production	Alternative Products
9/30/2025	3/31/2026	> BLM18AG601SN1#

Applications

Unsuitable Applications	Please be sure to read and comply with these " Precautions for use ".
Specific Applications	<u>Consumer equipment, Industrial equipment except for transportation & facility & energy equipment, Medical equipment [GHTF A/B/C] except for implant & surgery & auto injector</u> Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.
Recommended Applications	Consumer equipment

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM18TG601TN1#

“#” at the end indicates the package specification code.

Appearance & Shape

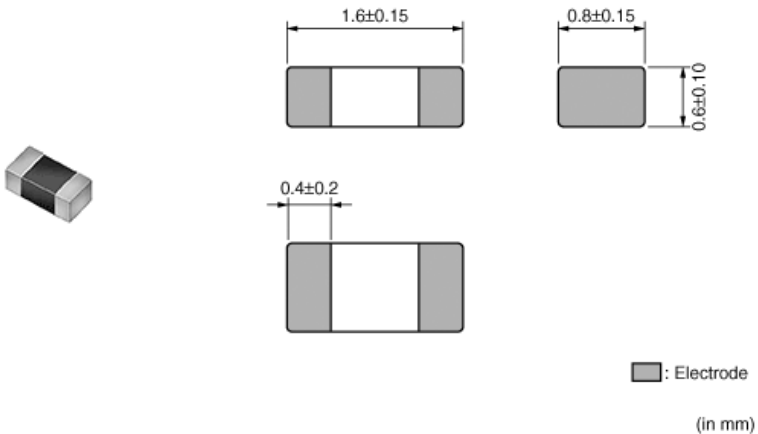

Length	1.6mm ±0.15mm
Width	0.8mm ±0.15mm
Thickness	0.6mm ±0.1mm
Size code in mm(inch)	1608/0603
Shape	SMD

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM18TG601TN1#

“#” at the end indicates the package specification code.

Specifications

Operating Temperature	-55 ~ 125°C
Number of Circuit	1
Rated Current (at 85°C)	200mA
Rated Current (at 125°C)	200mA
DC Resistance(max.)	0.45Ω
Impedance (at 100MHz)	600Ω ±25%

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM18TG601TN1#

“#” at the end indicates the package specification code.

Features

The chip ferrite beads BLM series is designed to function nearly as a resistor at noise frequencies, which greatly reduces the possibility of resonance and leaves signal wave forms undistorted.

BLM series is effective in circuits without stable ground lines because BLM series does not need a connection to ground.

The nickel barrier structure of the external electrodes provides excellent solder heat resistance.

BLM_T series generates an impedance from the relatively low frequencies. Therefore BLM_T series is effective in noise suppression in a wide frequency range (10MHz to several hundred MHz).

BLM_T series contributes further to miniaturizing portable equipment.

References

Packaging	Specifications 	Standard Packing Quantity
B	Bulk(Bag)	1000
D	180mm Paper Tape	10000

Mass(Typ.)	
1 piece	0.004g

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM18TG601TN1#

“#” at the end indicates the package specification code.

Attention


1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

BLM18TG601TN1#

“#” at the end indicates the package specification code.

Frequency Characteristic

周波数特性(|Z|+R+|X|)

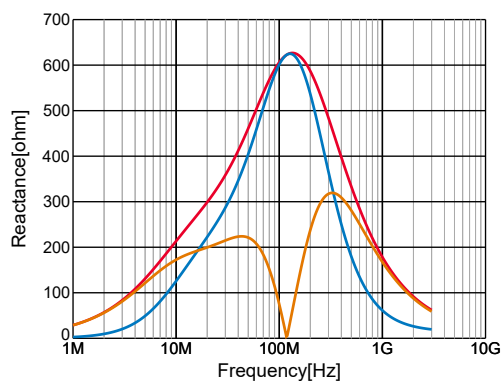

BLM18TG601TN1#, |Z|, DCR=0.45ohm, Rated Current=200mA

BLM18TG601TN1#, R, DCR=0.45ohm, Rated Current=200mA

BLM18TG601TN1#, |X|, DCR=0.45ohm, Rated Current=200mA


Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


BLM18TG601TN1#

“#” at the end indicates the package specification code.

Product Data

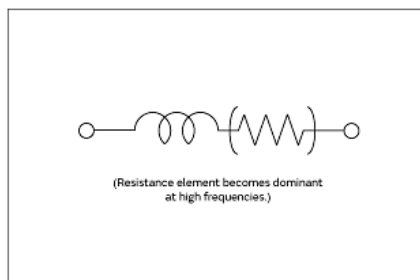

Equivalent Circuit

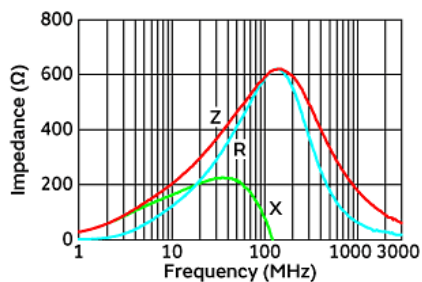

Impedance-Frequency Characteristics

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.