



External Antenna - Connector Mount

WXR

WXR1850 & WXR2400


Today's work and lifestyles require us to communicate anytime, anywhere whether on the move or sitting still. Bluetooth and 802.11 standards make wireless connections to computer networks and other devices possible, while at the same time enabling freedom of movement.

TE's practical and rugged external wireless device antennas are designed to fit into the portable devices used in office, industrial and home environments. The antennas feature flexible elements and many are $\frac{1}{2}$ wave coaxial dipole design for reduced ground dependence and improved performance.

FEATURES

- Injection molded high performance flexible cable antenna
- $\frac{1}{2}$ wave coaxial dipole design for improved performance

PARAMETER	SPECIFICATION
Frequency	1850-1990 MHz 2.4 - 2.5 GHz
VSWR	2:1 max at resonance
Polarization	Vertical
Gain	1.0 dBi
Nominal Impedance	50 ohms
Power Rating	50 watts
Temperature	-40° to +850°C
Length	7"
Drop Test	1M

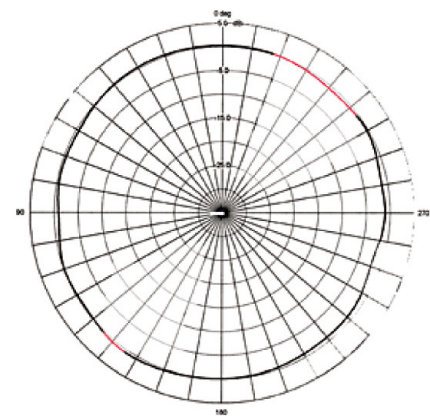

TYPICAL
AZIMUTH GAIN

CONNECTORS

MODEL#	PART#	CONNECTOR
WXR1850-TN	CAF28793	TNC-Male
WXR2400-TN	CAF28778	TNC-Male

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original