

2003

RELEASED FOR PUBLICATION


THIS DRAWING IS UNPUBLISHED.

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


© COPYRIGHT 2003

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	—		A	EGC0-0085-05	15.03.05	witt	—
			A1	ECR-06-026658	12NOV2006	witt	—
			B	ECR-15-016070	04NOV15	KH	CW

Crimpstempel, komplett
crimp punch, complete
1191-47001

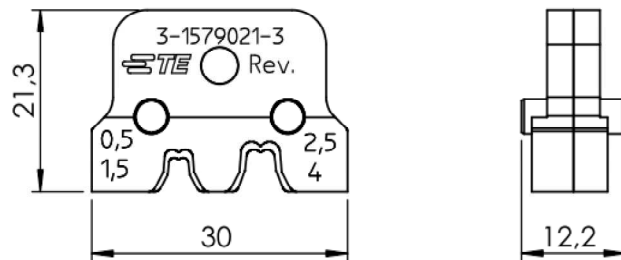

Crimpamboß, komplett
crimp anvil, complete
1191-47002

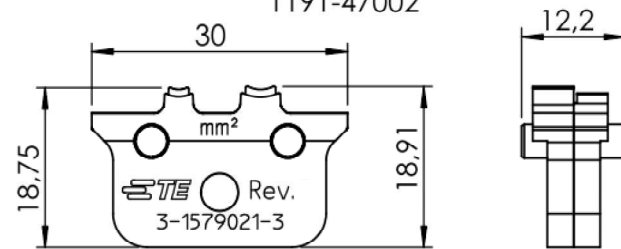

Spare die set for hand tool PN 654174-1

Kontakte	DGB (mm ²)	Drahtcrimp/Wire Crimp		Isolationscrimp/Insulation Crimp		Isolat.Ø
Contacts	Wire Size	Höhe/Height mm	Breite/Width mm	Höhe/Height mm	Breite/Width mm	Ins. Range
160773	0,5 - 1,5	1.45 ± 0.07	2.3 ± 0.05	-----	3.3 ± 0.1	2.3-3.3
341001	2,5 - 4,0	2.25 ± 0.07	3.3 ± 0.05	-----	4.6 ± 0.1	3.6-4.3

Die set with contact locator PN 6-1579015-5

DIMENSIONS:		DWN	Ch.Witt	15.03.05	MATERIAL	-	FINISH	-
mm		CHK	-	-	 TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	-				
0 PLC ±		PRODUCT SPEC	-	-	NAME DIE SET FOR POSITIVE-LOCK 0,5 - 4,0 mm ² Matrize für Positive-Lock 0,5 - 4,0 mm ²			
1 PLC ±		APPLICATION SPEC	-	-				
2 PLC ±		WEIGHT	-	-	SIZE	A 4	CAGE CODE	00779
3 PLC ±		CUSTOMER DRAWING		SCALE		SHEET 1 OF 1		REV B
4 PLC ±								
ANGLES ±°								
