


8			7							
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20				
© COPYRIGHT 20			BY -			ALL RIGHTS RESERVED.				
PART NUMBER		REV	FIRST USED		POWER UNIT		FEED TYPE		DESCRIPTION	
1852385-1		C	122500-1		LEADMAKER		POST FEED		CUTS CARRIER	
1852385-2		C	565435-5		BENCH MODEL K		PRE FEED		CUTS CARRIER	
1852385-3		C	354500-1		BENCH MODEL G		PRE FEED		CUTS CARRIER	
1852385-6		C	122500-1		LEADMAKER		POST FEED		CONTINUOUS CARRIER	
7-1852385-7		A	-		-		-		SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

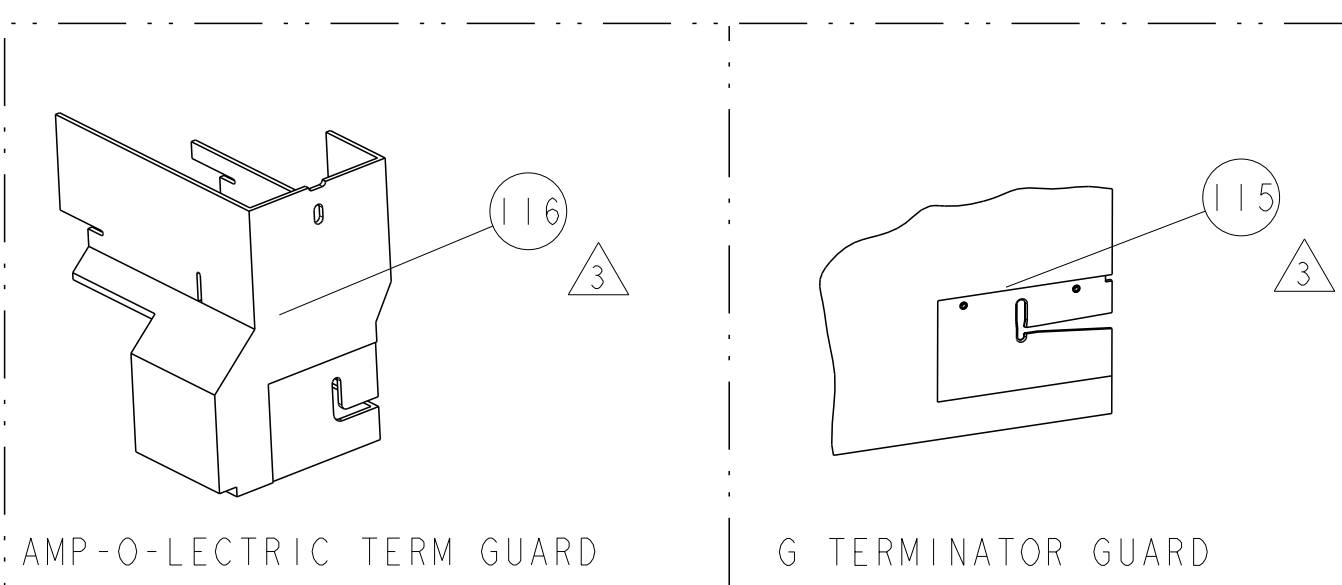

TERMINAL NAME: MX 150 RECEPTACLE TERMINAL					
TEC PN	MANF PN	MOLEX TERMINAL - MOLEX CRIMP SPECS			
1949221	33012-3002				
-	-	PAD LTR	CRIMP HEIGHT	WIRE SIZE	
-	-	A	1.30±0.05mm[.051±.002]	18AWG	
-	-	B	1.25±0.05mm[.049±.002]	20AWG	
-	-	C	-	-	
-	-	D	-	-	
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	2.08mm[.082]	F	18-20 AWG
-	-	INSUL	2.29mm[.090]	O	2.59 max
WIRE STRIP LENGTH 4.62-5.00		TERM APPL SPEC NONE	FEED 2.02	APPLICATOR INSTRUCTIONS 408-8040	SET UP GAGE 458637-1

LOC		DIST		REVISIONS											
A		66		P	LTR	DESCRIPTION				DATE	DWN	APVD			
				A1		MOLEX WAS AMP TERMINAL AND SPEC (ZONE D3)				JUNE2007	CMR	TB			
				B		ECR-07-022847				SEPT2007	CMR	GB			
				C		ECR-12-001955				31JAN2012	MY	GB			