

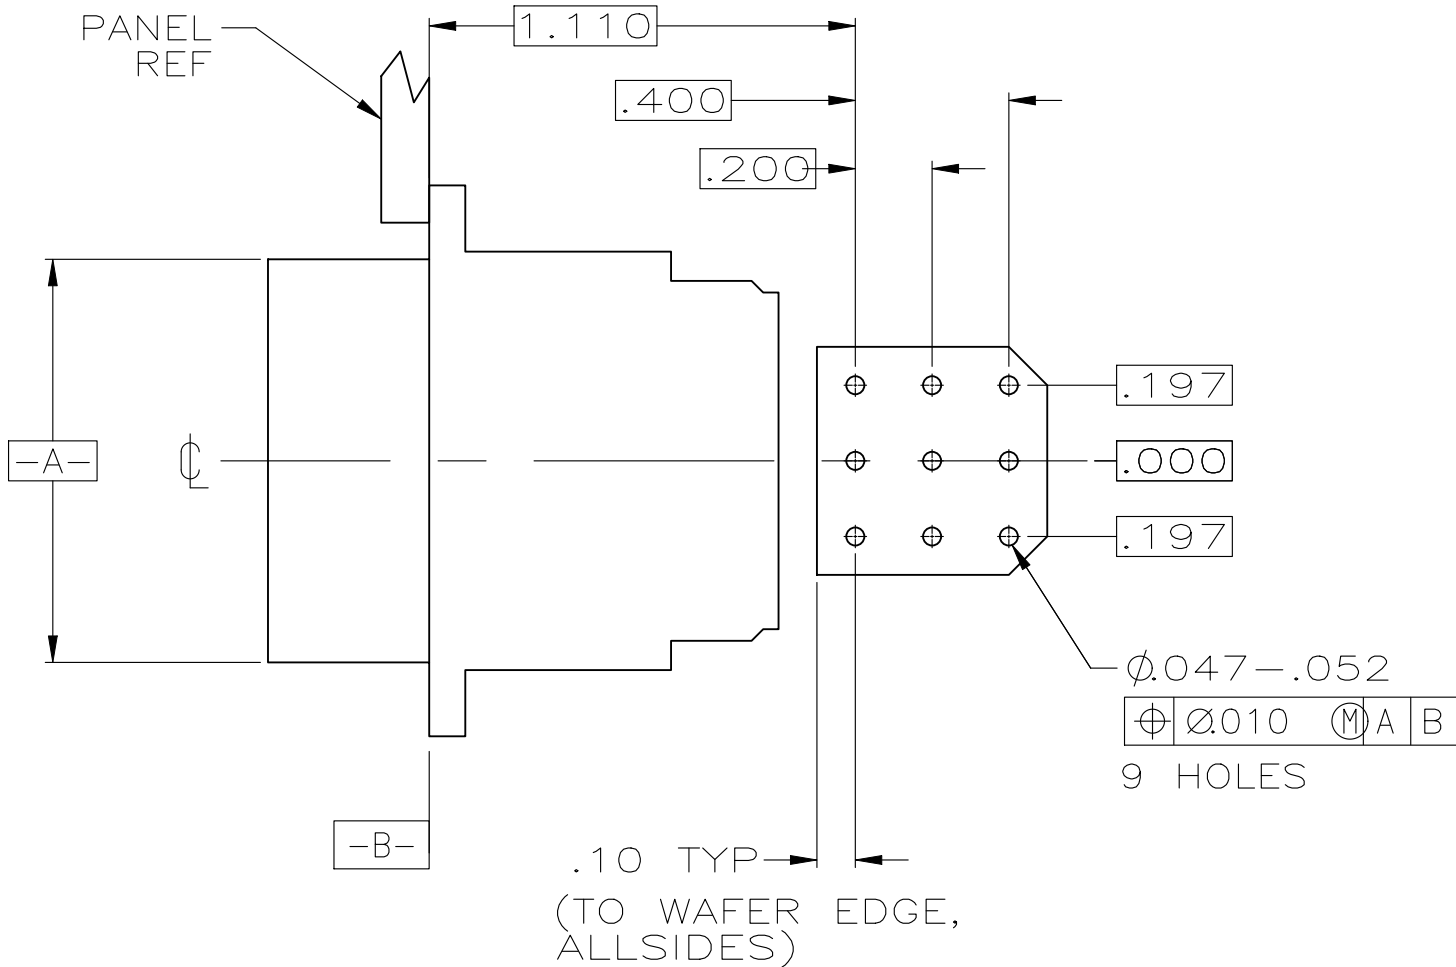
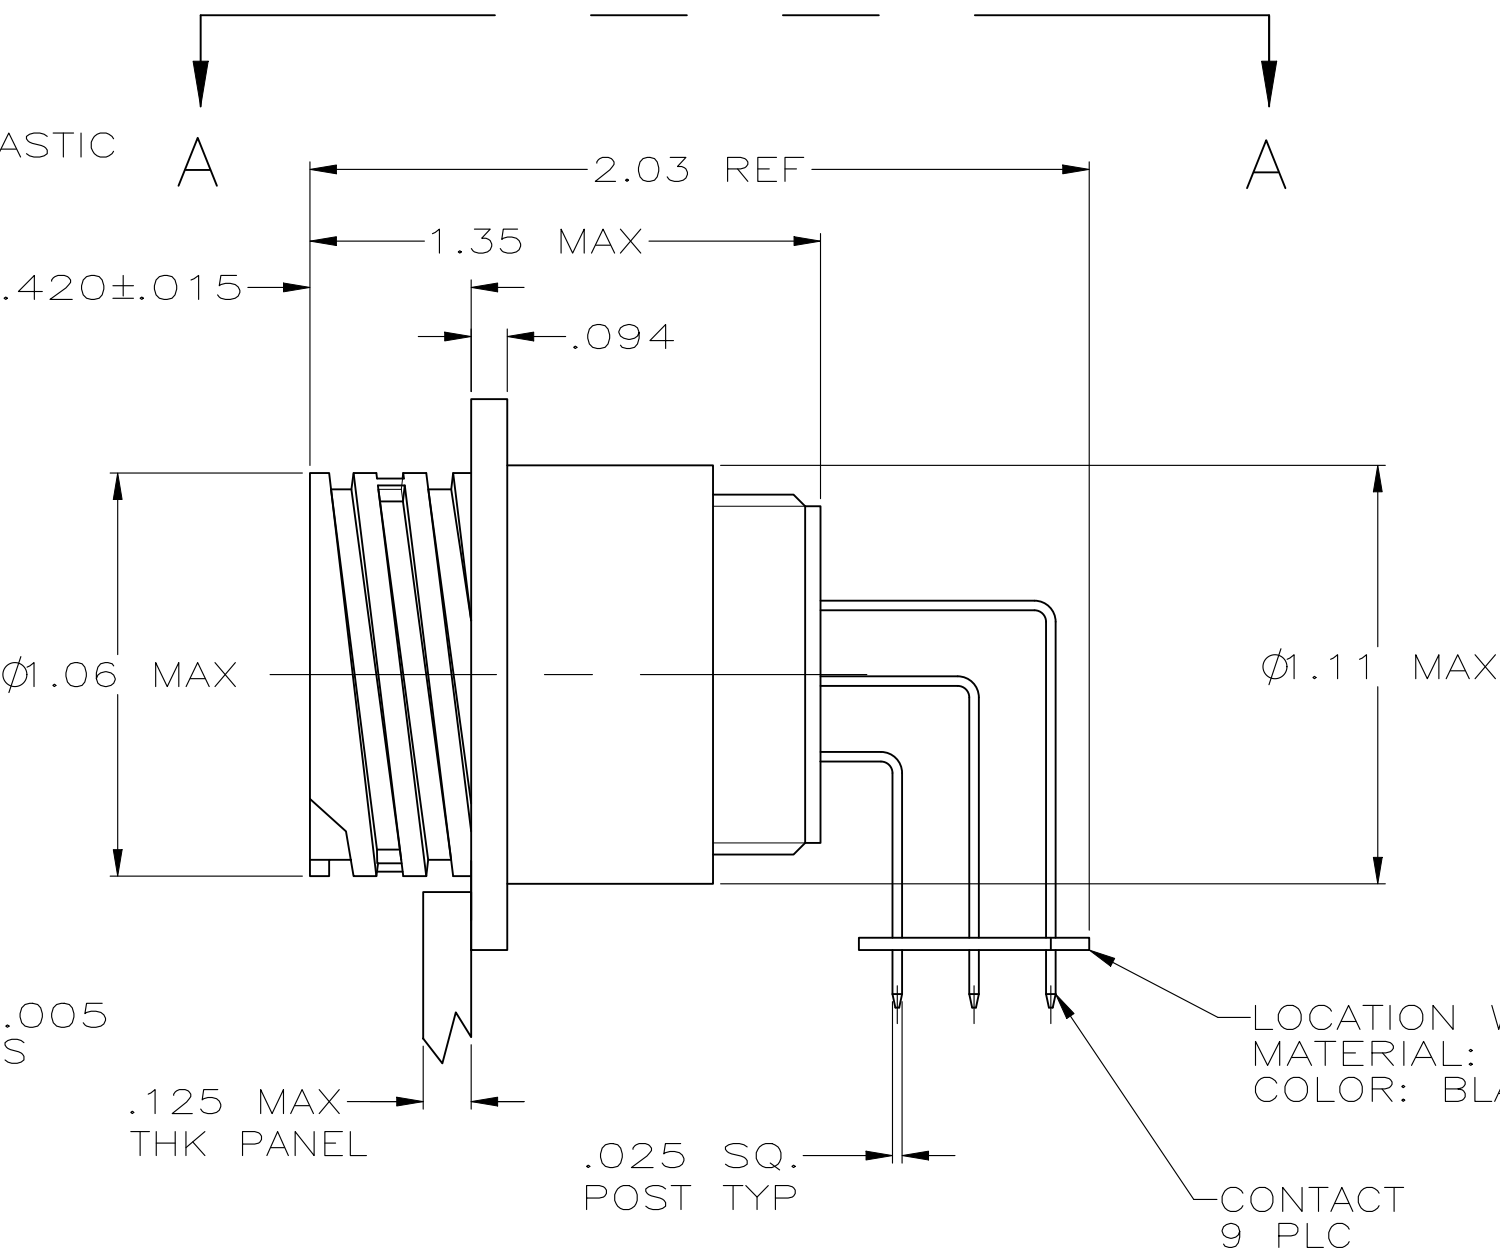


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-24-213594	04JUL2024	RK	FJS

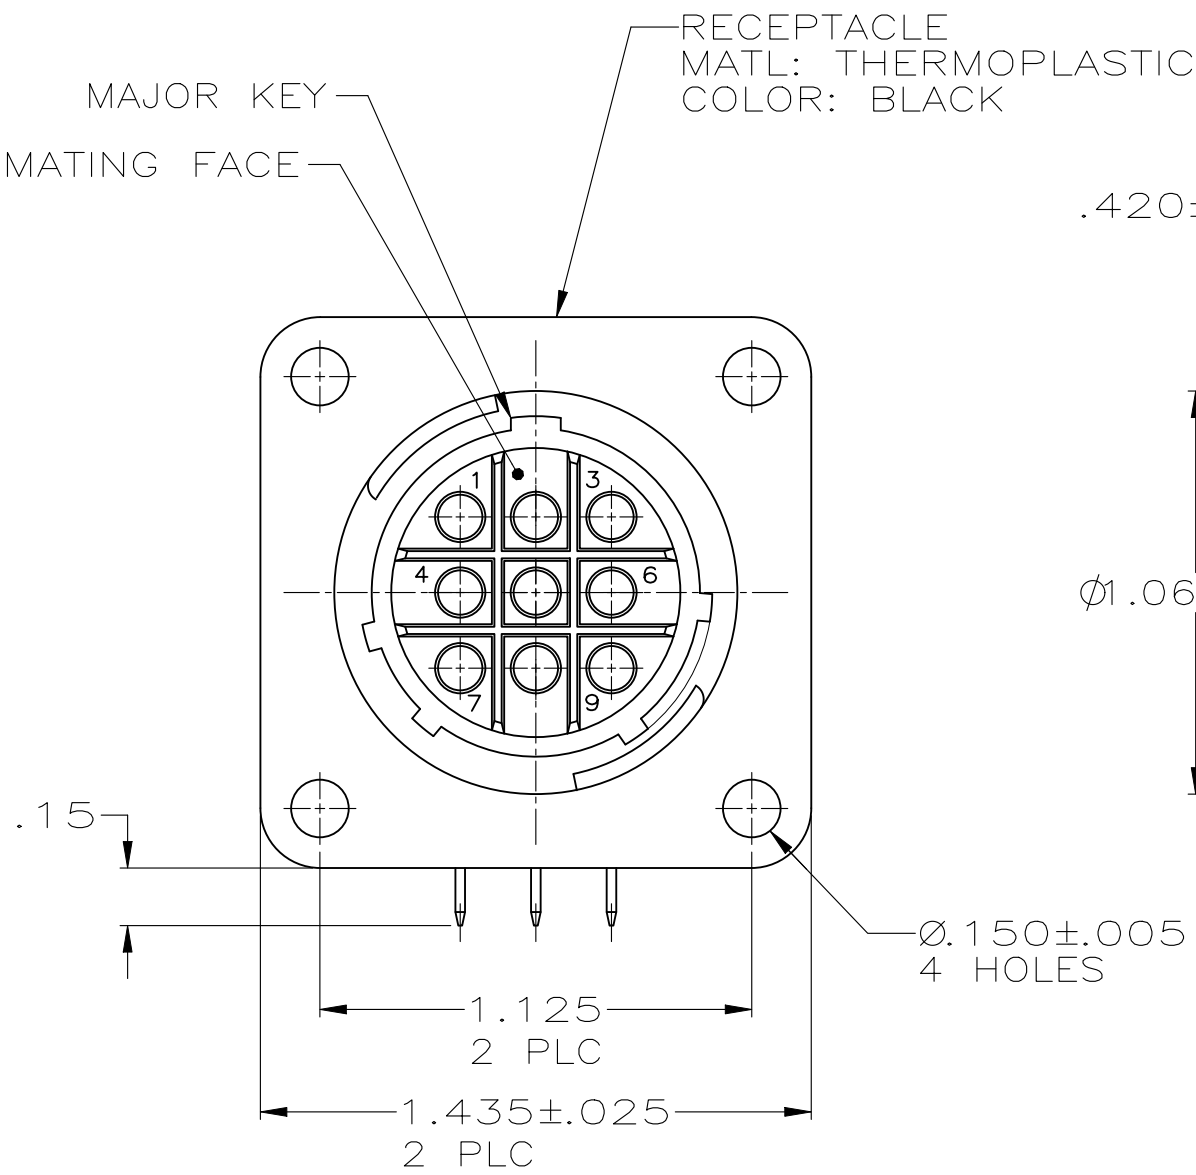

VIEW A-A 4
RECOMMENDED PC BOARD LAYOUT

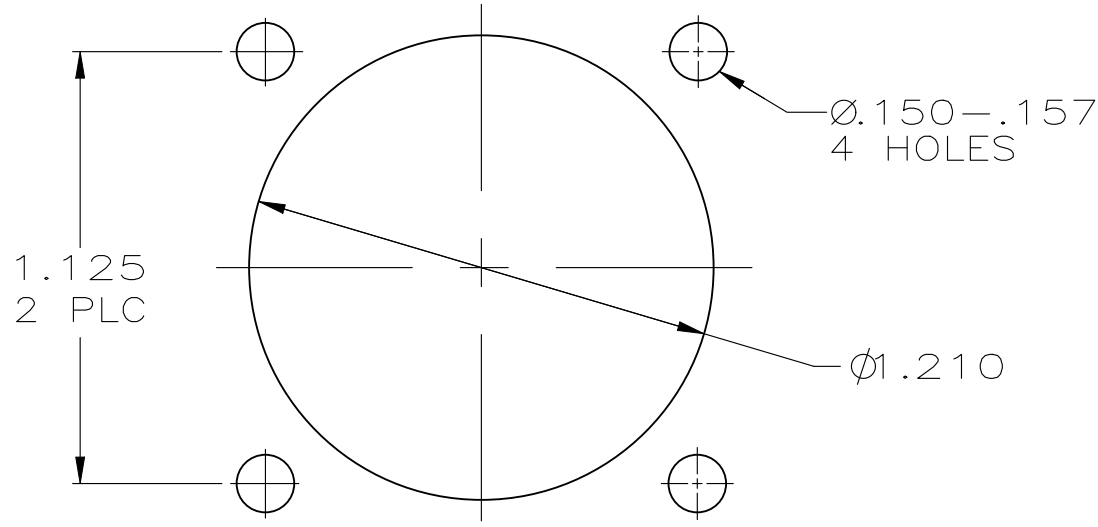

RECOMMENDED
PANEL CUTOUT

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 #6 FASTENER RECOMMENDED FOR MOUNTING.
- 3 CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000050 MIN NICKEL.
- 4 PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.
- 5 CONTACT BODY: .000030 MIN PRECIOUS METAL PLATE FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER .000050 MIN NICKEL.

OBSOLETE	5	1-796497-1
	3	796497-1
CONTACT FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN HAMNER 4-13-00		TE TE Connectivity		
DIMENSIONS: INCHES			CHK M.CHACKO 4-18-00	APVD M.CHACKO 4-18-00			
			TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
			0 PLC ± - 1 PLC ± - 2 PLC ± .03 3 PLC ± .010 4 PLC ± - ANGLES ± - FINISH		PRODUCT SPEC APPLICATION SPEC		
MATERIAL -			WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-796497
CUSTOMER DRAWING			SCALE 2:1		SHEET 1 OF 1	REV C	