


8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
© COPYRIGHT 20			BY -			ALL RIGHTS RESERVED.		
PART NUMBER		REV	FIRST USED		POWER UNIT		FEED TYPE	
1852447-1		A	122500-1		LEADMAKER & BENCH MODEL G		POST FEED	
1852447-2		A	565435-5		BENCH MODEL K		POST FEED	
7-1852447-7		A	-		SPARE PARTS		-	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

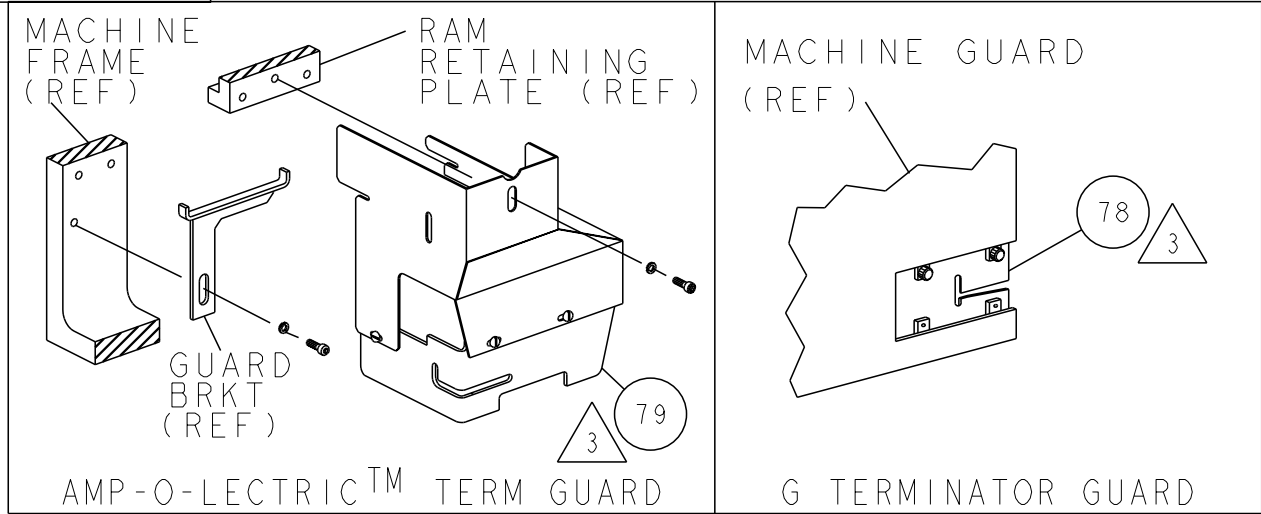

TERMINAL NAME: 90 DEGREE FLAG					
TEC PN	MFR PN	VAN ENG. TERMINAL - VAN ENG. CRIMP SPECS			
1949299-1	FL100-B-01				
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE
-	-	A	.090±.002[2.29±0.05mm]		12AWG
-	-	B	.085±.002[2.16±0.05mm]		14AWG
-	-	C	.080±.002[2.03±0.05mm]		16AWG
-	-	D	.075±.002[1.91±0.05mm]		18AWG
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	.140 [3.56mm]	F	18-12 AWG
-	-	INSUL	.180 [4.57mm]	F	Ø.115-.165
WIRE STRIP LENGTH .230 -.245	TERM APPL SPEC NONE	FEED .774	APPL INSTRUCTIONS 408-8039	SET UP GAGE 458638-1	

LOC		DIST		REVISIONS				
A	66	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		A		RELEASED	22JUN2007	BH	BH	
		B		ECR-12-004693	13MAR2012	MY	GB	

-	1	1	-	2-460680-2	FEED FINGER ASSEMBLY	175
-	2	2	-	3-21000-3	SCR, SKT HD CAP 8-32 X 1.500	174
-	1	1	-	692655-7	AIR FEED VALVE ASSEMBLY	173
-	1	1	-	692655-5	AIR FEED VALVE ASSEMBLY	170
-	1	1	-	460277-1	AIR FEED ASSY	169
-	2	2	-	3-354779-8	PIN, WIRE DISC, .3180	129
-	2	2	-	2-354779-8	PIN, WIRE DISC, .3130	128
-	2	2	-	1-354779-8	PIN, WIRE DISC, .3080	127
-	2	2	-	354779-9	PIN, WIRE DISC, .3035	126
-	1	1	-	455888-1	SPACER, CRIMPER	81
-	REF	-	-	455745-1	GUARD WINDOW	79
-	-	REF	-	679532-1	INSERT, GUARD	78
-	1	1	-	690603-1	SPRING ASSIST AMP-O-MATOR APPLICATOR	74
-	1	1	-	217238-1	GENERAL INSTRUCTION PKG	72
-	1	1	-	4088039	EF APPL INST 408-8039	71
-	1	1	-	461264-1	PLATE, IDENTIFICATION	67
-	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	-	986950-1	WASHER, FLAT PRECISION	64
-	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	-	23030-1	SCR, SKT HD CAP 6-32 x .25	62
-	2	2	-	1-21000-3	SCR, SKT HD CAP 4-40 X .250	59
-	2	2	-	2-21000-6	SCR, SKT HD CAP 8-32 X .375	58
-	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	57
-	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	56
-	2	2	-	21018-4	NUT, HEX, REG 4-40	54
-	2	2	-	21022-2	NUT, LOCK, HEX, TORQUE, 8-32	53
-	2	2	-	2-21006-6	SCR, SET, CUP POINT 4-40 X .625	52
-	1	1	-	1-21002-7	SCR, BTN SKT CAP 6-32 X .375	49
-	1	-	-	690501-3	CAM, POST FEED, 1 1/8	48
-	-	1	-	690501-4	CAM, POST-FEED 1 5/8	47
-	1	1	-	1633570-1	SUB ASSY, APPLICATOR FRAME	46
-	1	1	-	690191-1	PLUG, NYLON	45
-	1	1	-	2-819307-5	RAM, SIDE FEED	44
-	1	1	-	690125-1	SHIM SUB-ASSY	43
-	1	1	-	690124-1	WASHER, RAM (.115)	42
-	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	-	23241-6	BALL, STEEL	40
-	1	1	-	690170-1	SPRING, COMPRESSION	39
-	1	1	-	1-690142-1	DISC, INSULATION	38
-	1	1	-	354777-1	WIRE DISC, ASSEMBLY	37
-	1	1	-	22480-5	SPRING, COMPRESSION	36
-	1	1	-	690212-1	POST, RAM	35
-	2	2	-	21024-5	WASHER, SPRG LOCK, REG NO 10	34
-	8	8	-	21024-4	WASHER, SPRG LOCK, REG NO 8	32
-	2	2	-	4-21000-0	SCR, SKT HD CAP 10-32 X 1.250	31
-	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	29
-	1	1	-	690451-1	SPACER, STRIPPER	28
-	1	1	-	690455-9	STRIPPER, FRONT CASTING	27
-	2	2	-	22354-8	STUD, THREADED	25
-	1	1	-	2-458803-1	PLATE, STRIP GUIDE, SLOTTED	24
-	2	2	-	4-22281-1	SPRING, DRAG	22
-	1	1	-	464451-1	ARM, STOCK DRAG	21
-	1	1	-	1-464452-1	DRAG, STOCK	20
-	1	1	-	454204-2	GUIDE, LOWER STRIP	19
-	1	1	-	1633575-1	GUIDE, LOWER STRIP	18
-	4	4	-	3-21002-3	SCR, BTN SKT HD CAP 1/4-20 X .500	17
-	1	1	-	683875-1	PLATE, DRAG LOCATOR	15
-	1	1	-	1633558-2	REAR SHEAR PLATE	11
-	2	2	-	8-240645-0	SPACER, SHEAR PLATE	10
-	1	1	-	1633557-1	ANVIL, INSULATION	9
-	1	1	-	1633342-2	ANVIL, WIRE	8
-	1	1	-	1633573-1	FORMING TOOL	7
-	1	1	-	1633567-1	BLADE, SHEAR	6
-	1	1	-	3-240641-9	SPACER	5
-	1	1	-	238009-1	BLOCK, FL CRIMPER SPACER	4
-	1	1	-	1633560-1	CRIMPER, INSULATION F	3
-	1	1	-	2-455888-9	SPACER, CRIMPER	2
-	1	1	-	1633581-1	CRIMPER, WIRE PREMIUM	1

-77	-2	-1	U/M	PART NO	DESCRIPTION	ITEM NO
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±.01 7 PLC ±.01 5 PLC ±.01 3 PLC ±.001 4 PLC ±.0001 ANGLES ±.0001 FINISH -				DWN B. HIGMAN 05APR2007 CBY B. HIGMAN 05APR2007 APVD T. ELBIN 05APR2007	NAME	END FEED HDM APPLICATOR
MATERIAL -				PRODUCT SPEC -	APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO
				WEIGHT -	A100779C=1852447	
				CUSTOMER ACCESSIBLE PRODUCTION DRAWING		
				SCALE 3:5	SHEET 1 OF 1	REV B