
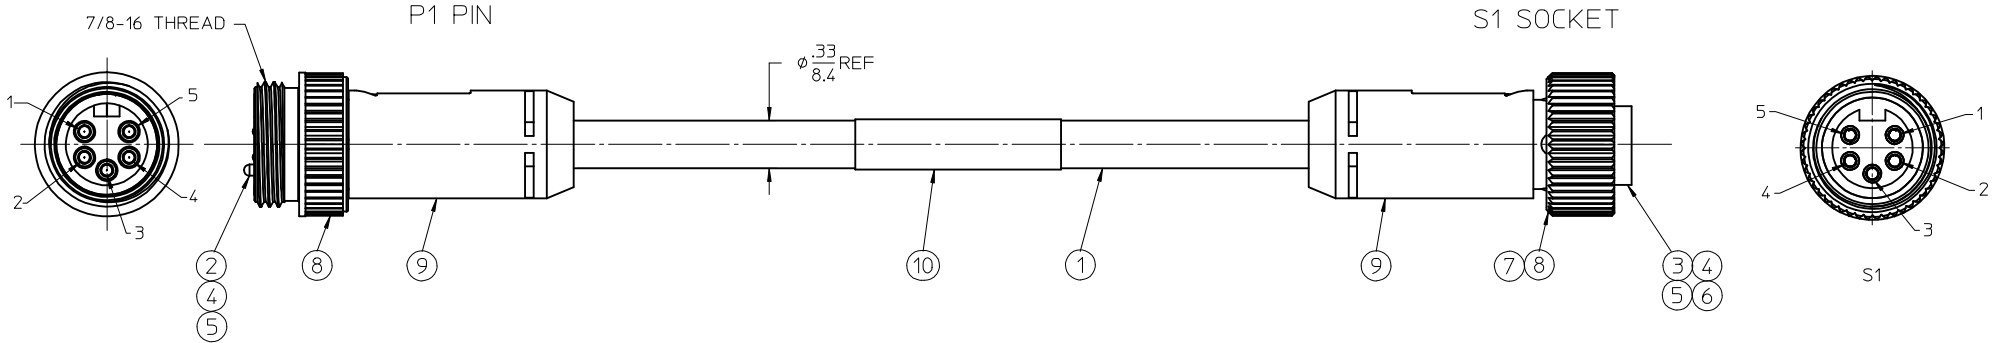
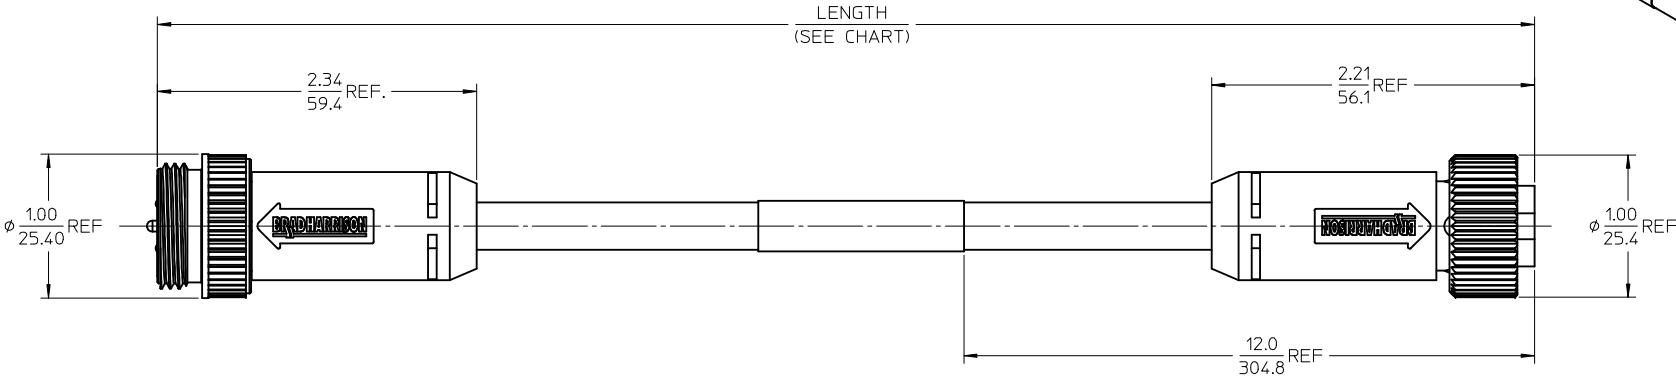


PART NUMBER	ENGINEERING NO.	LENGTH
1300250233	DNB11A-M010	3' 3" +2.19 - 0 [1.0M +55.6 - 0]
1300250235	DNB11A-M030	9' 10" +3.50 - 0 [3.0M +88.9 - 0]
1300250237	DNB11A-M050	16' 5" +6.50 - 0 [5.0M +165.1 - 0]

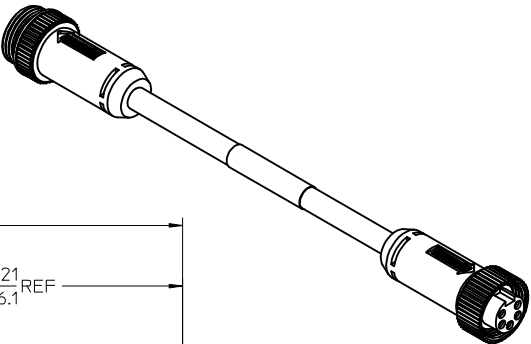

- NOTES:
1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. CABLE ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BARCODE LABEL ATTACHED TO OUTSIDE OF BAG
 4. WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
 5. MATES WITH: MINI CHANGE, A-SIZE 5 POLE
 6. ELECTRICAL SPECIFICATIONS:
VOLTAGE RATING: 300V
CURRENT RATING: 4 AMPS
 7. ASSEMBLY IS RoHS COMPLIANT

P1		S1
1	DRAIN	1
2	RED +V	2
3	BLACK -V	3
4	WHITE CAN H	4
5	BLUE CAN L	5

WIRING DIAGRAM

10	1	LABEL	PLASTIC FILM	BLACK/YELLOW
9	1	OVERMOLD	PVC	GRAY
8	1	COUPLING NUT	ZINC DIE CAST	BLACK
7	1	FRICTION RING	NYLON	WHITE
6	5	SOCKET SLEEVE	ST. STEEL	
5	3	CONTACT, 20 AWG	BRASS	GOLD PLATED
4	2	CONTACT, 16 AWG	BRASS	GOLD PLATED
3	1	INSERT, FEMALE, 5 POLE	PVC	GRAY
2	1	INSERT, MALE, 5 POLE	PVC	GRAY
1	1	CABLE - MID, DEV-NET, TRUNK, 20/2, 16/2	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: WNA2010-0048 DRAWN:BRUPERT CHKD: APPR:J.MURPHY A	DESCRIPTION 2009/07/17 2009/07/20	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1.5:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY B. RUPERT	DATE 2009/07/07	TITLE MINI-CHANGE 5 POLE M/F, DEVICE NET TRUNK CABLE - MID				
			4 PLACES	± ---	± ---	CHECKED BY B. WOODMAN	DATE 2009/07/07					
			3 PLACES	± ---	± ---							
			2 PLACES	± ---	± ---							
			1 PLACE	± ---	± ---	APPROVED BY J. MURPHY	DATE 2009/07/07	MOLEX INCORPORATED				
			ANGULAR ±1/2°		MATERIAL NO.	DOCUMENT NO.	SHEET NO.					
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-130025-009					
			REV			SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					