
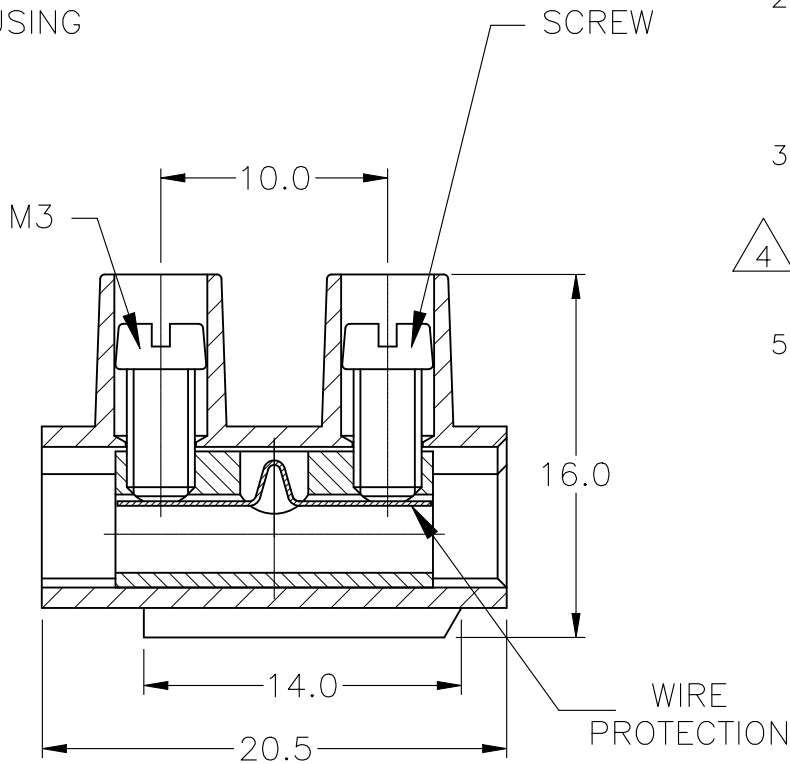


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P2	PART STATUS CHANGE TO DISCONTINUNACE	29JUN2026	NS	PS

1. MATERIAL:
HOUSING: POLYAMIDE 6, UL94V-2.
COLOR: NATURAL (OFF WHITE).
TUBULAR CONTACT: BRASS, TIN PLATED.
SCREW: M3, STEEL, ZINC PLATED W/ NON-
HEXAVALENT CHROMATE (CHROME III).
WIRE PROTECTION: STAINLESS STEEL.
2. ELECTRICAL:
CURRENT RATING: 30A, 250V, 10-22 AWG.
CURRENT RATING: 25A, 250V, 12-24 AWG.
WIRE RANGE: 10-24 AWG.
3. ENVIRONMENTAL:
CONTINUOUS WORKING TEMP.: -35°C TO +100°C.
- 4 CUTTING PROJECTION CAN BE ON BOTH SIDES
DEPENDING ON CUTTING LOCATION
5. CUTTING BURR MAX. 1mm ALLOWED.

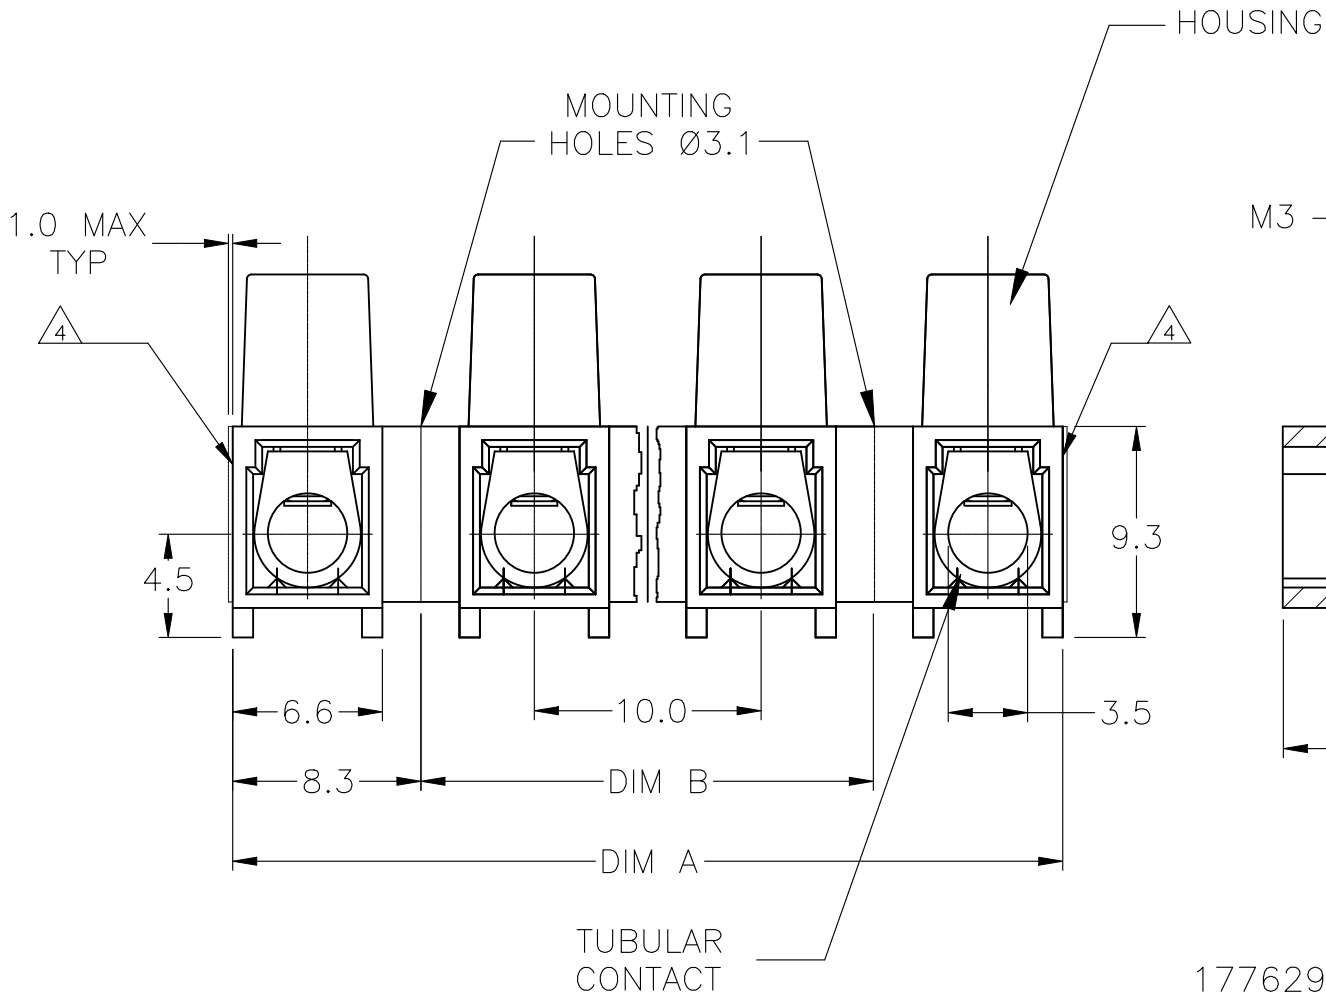

1776296-4 AS SHOWN

OBSOLETE	100.0	116.6	TSB500 1231DS	1-1776296-2
	90.0	106.6	TSB500 1131DS	1-1776296-1
	80.0	96.6	TSB500 1031DS	1-1776296-0
	70.0	86.6	TSB500 0931DS	1776296-9
	60.0	76.6	TSB500 0831DS	1776296-8
	50.0	66.6	TSB500 0731DS	1776296-7
	40.0	56.6	TSB500 0631DS	1776296-6
	30.0	46.6	TSB500 0531DS	1776296-5
	20.0	36.6	TSB500 0431DS	1776296-4
	10.0	26.6	TSB500 0331DS	1776296-3
	-	16.6	TSB500 0213DS	1776296-2
	-	6.6	TSB500 0131DS	1776296-1
	DIM B	DIM A	T & B PART NUMBER	TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 3/18/05		TE Connectivity				
DIMENSIONS: mm		CHK C RICHARD 3/18/05						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2'		APVD C RICHARD 3/18/05		NAME EUROPA TERMINAL BLOCK W/WIRE PROTECTOR MOUNTING HOLES DIA 3.1, 10mm PITCH -			
			PRODUCT SPEC -					
			APPLICATION SPEC -					
			WEIGHT -					
MATERIAL SEE NOTES	FINISH SEE NOTES		SIZE A3		CAGE CODE 00779	DRAWING NO C-1776296	RESTRICTED TO -	
CUSTOMER DRAWING						SCALE NTS	SHEET 1 OF 1	REV P2