

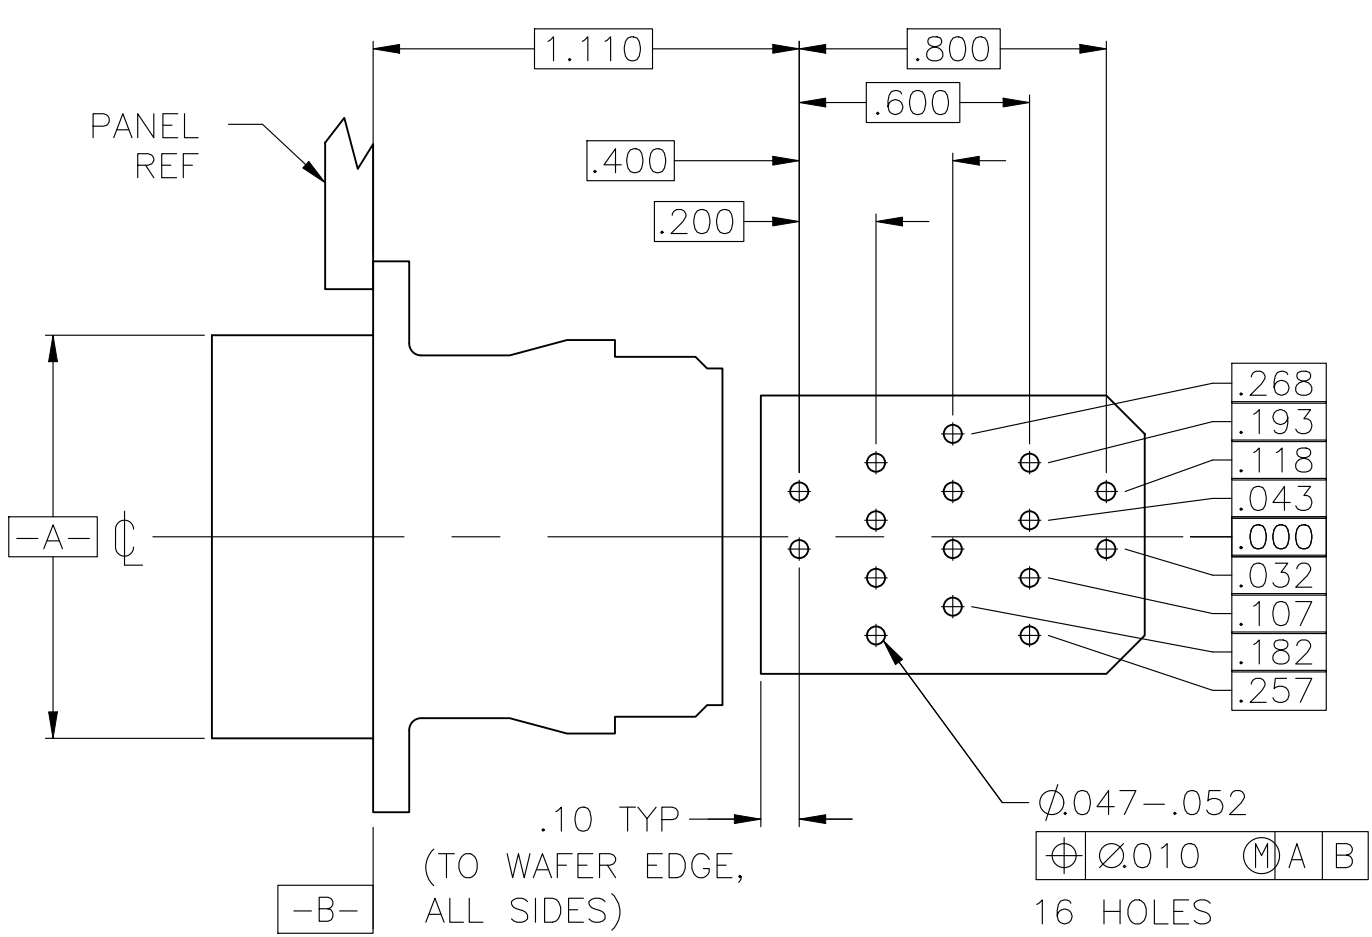


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-24-213594	04JUL2024	RK	FJS

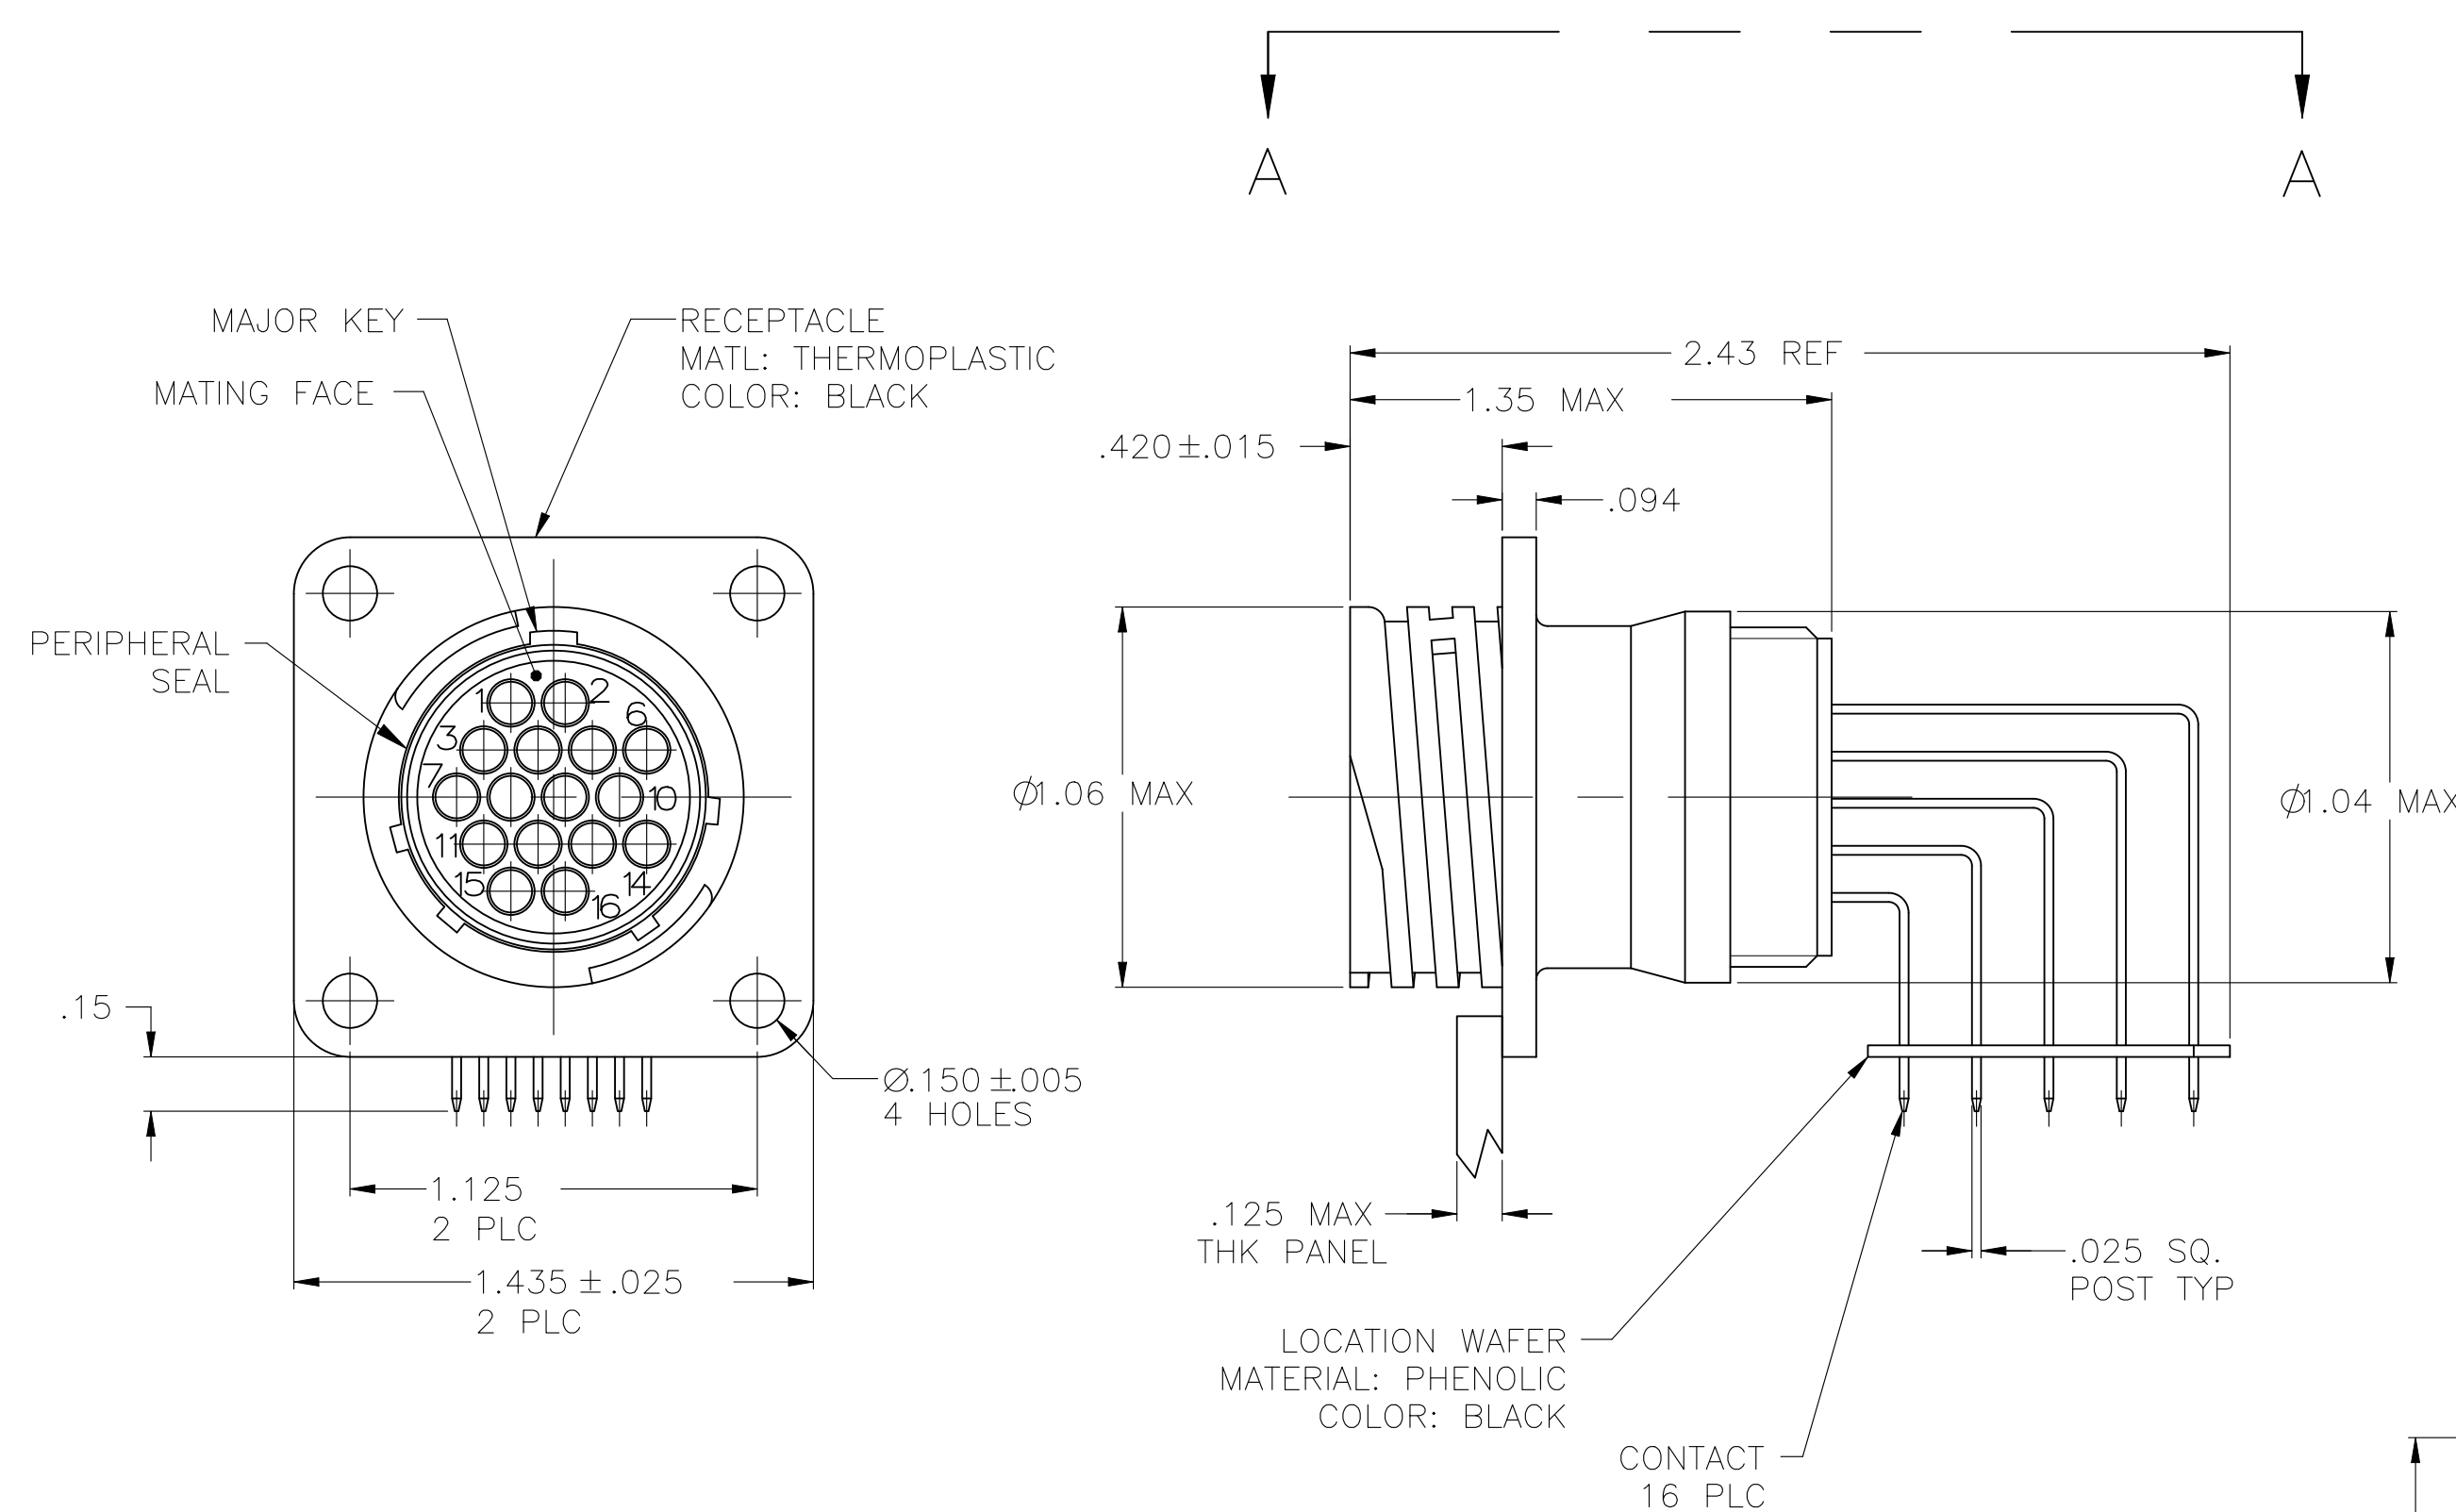

VIEW A-A
RECOMMENDED PC BOARD LAYOUT

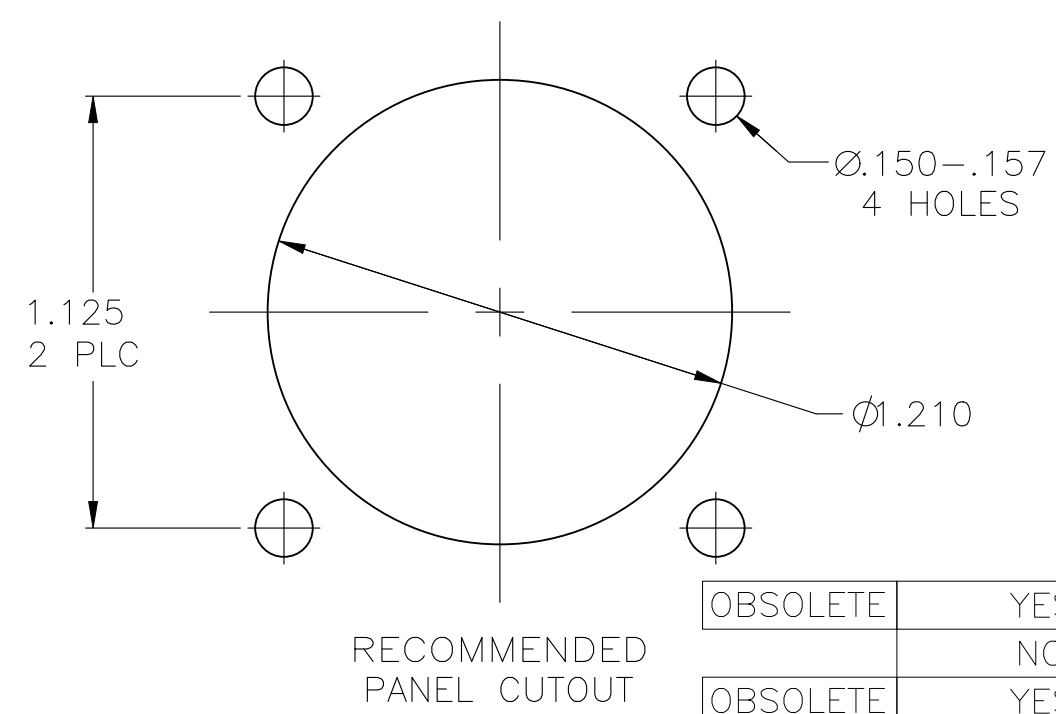

RECOMMENDED
PANEL CUTOUT

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 #6 FASTENER RECOMMENDED FOR MOUNTING.
- 3 CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.
- 4 PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.
- 5 CONTACT BODY: .000030 MIN PRECIOUS METAL PLATE FOR A LENGTH OF .250 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER .000100 MIN COPPER.
- 6 CONTACT BODY AND POST PLATED TIN OVER NICKEL

OBSOLETE	YES	6	1-796404-2
OBSOLETE	NO	5	1-796404-1
OBSOLETE	YES	3	796404-2
OBSOLETE	NO	3	796404-1

PERIPHERAL SEAL	CONTACT FINISH	PART NUMBER
-----------------	----------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	4-5-00	TE Connectivity	
		CHK	4-6-00		
		APVD	4-6-00		
		PRODUCT SPEC			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	RECEPTACLE ASSY, POSTED, RT ANGLE, STD SEX, SIZE 17-16, SERIES 1, CPC	
		1 PLC	± -		
		2 PLC	± .03		
		3 PLC	± .010		
		4 PLC	± -	SIZE	
		ANGLES	± -	CAGE CODE	
		FINISH	-	DRAWING NO	
				RESTRICTED TO	
				A2 00779 C=796404	
				CUSTOMER DRAWING	
				SCALE 2:1 SHEET 1 OF 1 REV E	