
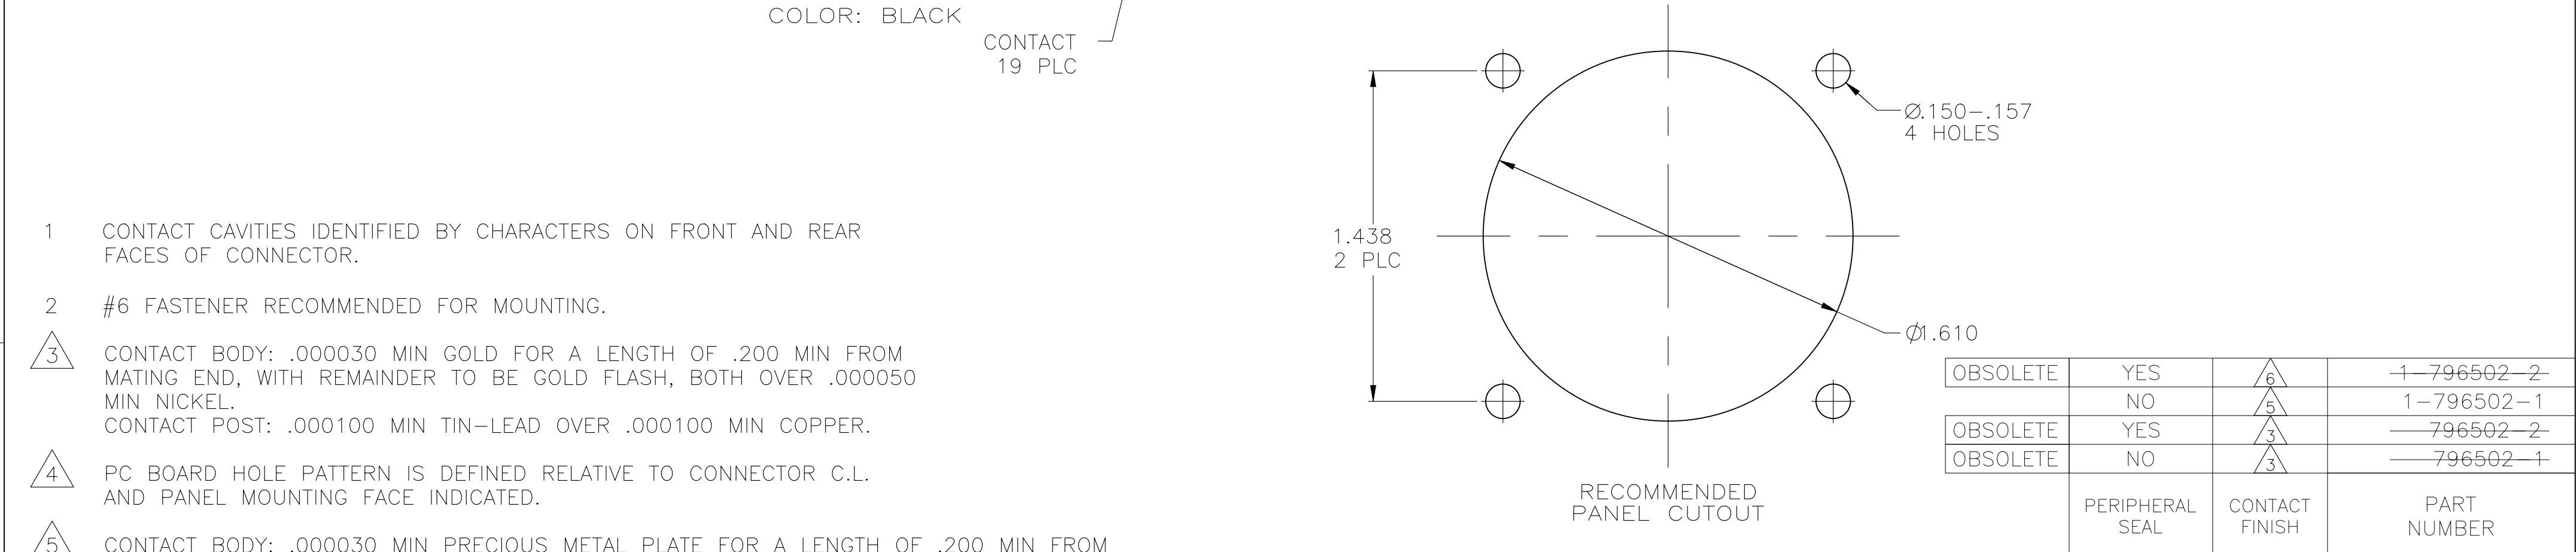


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-24-213594	04JUL2024	RK	FJS

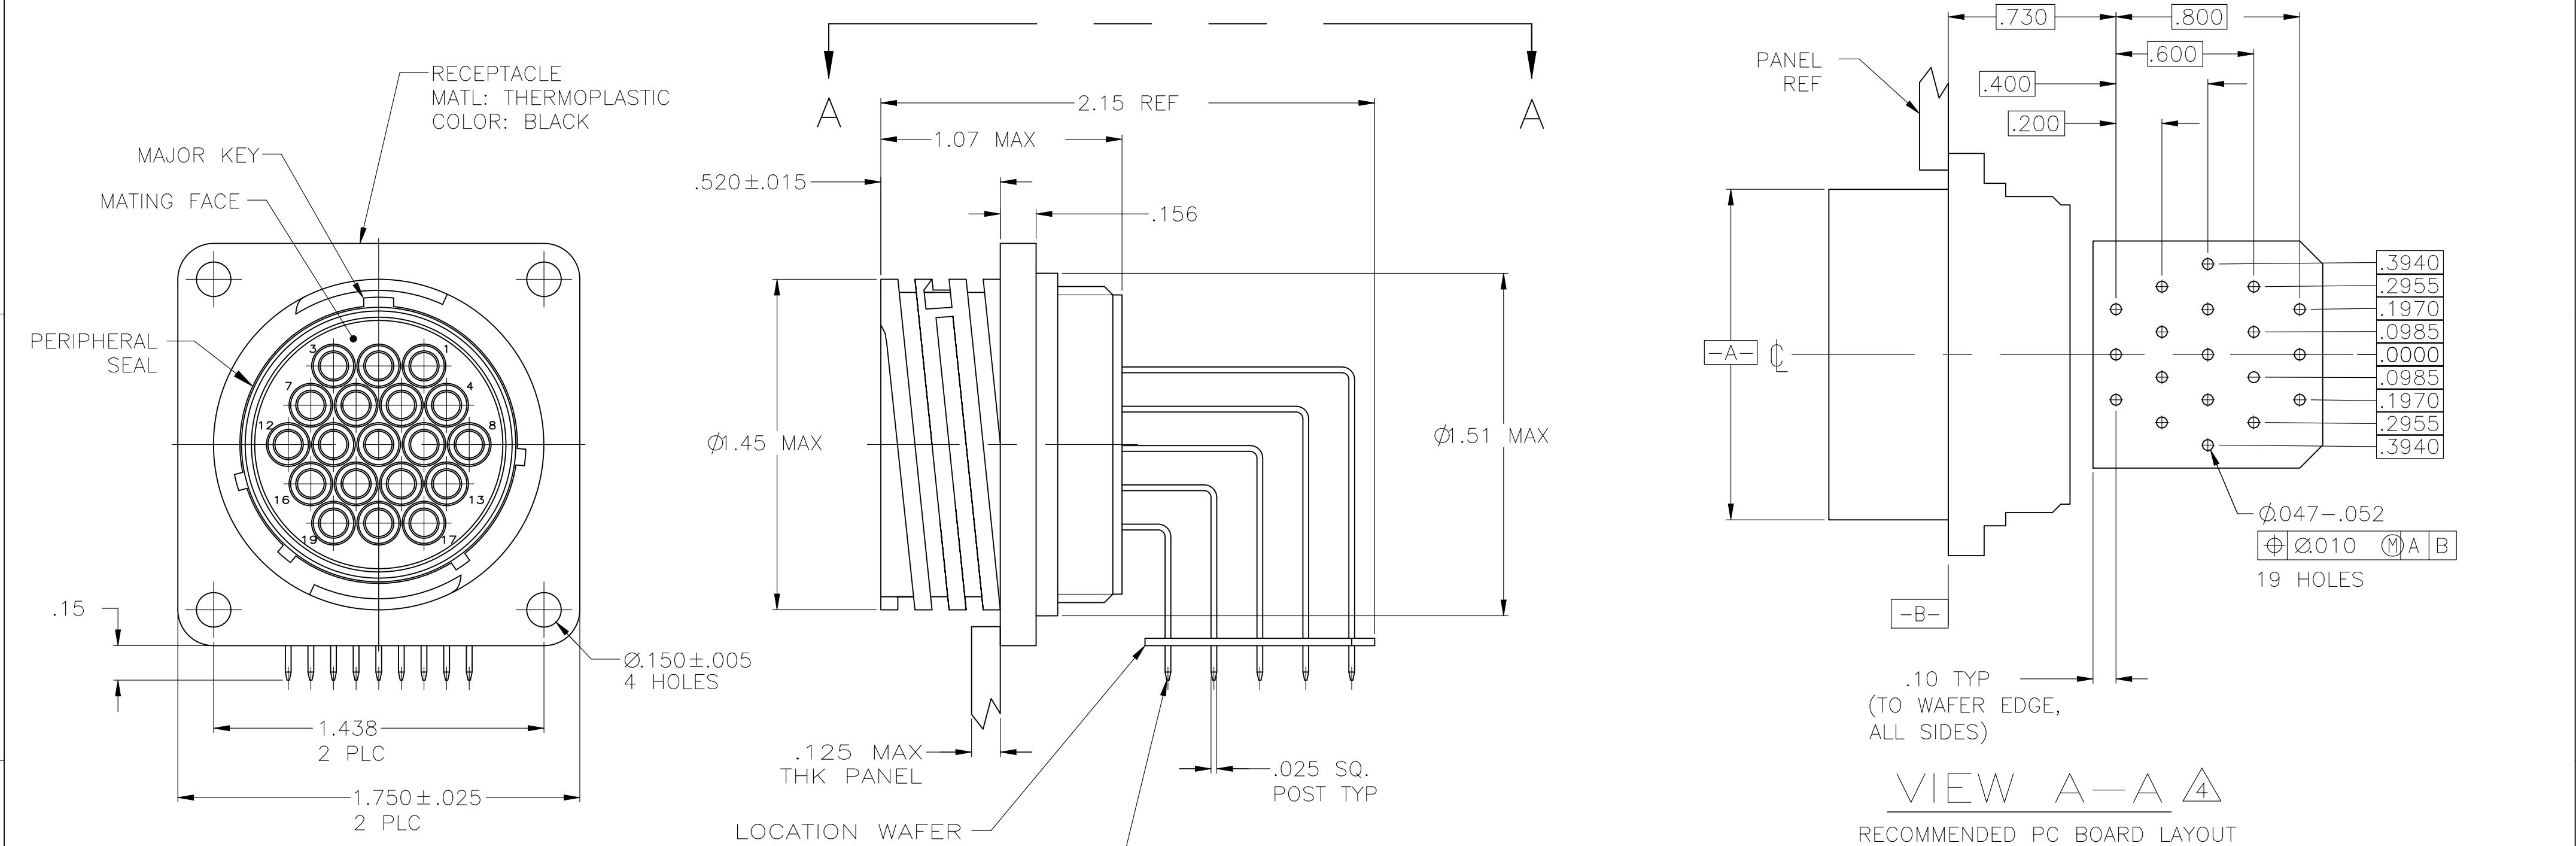

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
- 2 #6 FASTENER RECOMMENDED FOR MOUNTING.
- 3 CONTACT BODY: .000030 MIN GOLD FOR A LENGTH OF .200 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN-LEAD OVER .000100 MIN COPPER.
- 4 PC BOARD HOLE PATTERN IS DEFINED RELATIVE TO CONNECTOR C.L. AND PANEL MOUNTING FACE INDICATED.
- 5 CONTACT BODY: .000030 MIN PRECIOUS METAL PLATE FOR A LENGTH OF .200 MIN FROM MATING END, WITH REMAINDER TO BE GOLD FLASH, BOTH OVER .000050 MIN NICKEL.
CONTACT POST: .000100 MIN TIN OVER .000100 MIN COPPER.
- 6 CONTACT BODY AND POST-TIN/NICKEL PLATE

OBSOLETE	YES	6	1-796502-2
	NO	5	1-796502-1
OBSOLETE	YES	3	796502-2
OBSOLETE	NO	3	796502-1

PERIPHERAL SEAL	CONTACT FINISH	PART NUMBER
-----------------	----------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN HAMNER 4-12-00		 TE Connectivity				
DIMENSIONS: INCHES		CHK M.CHACKO 4-13-00						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M.CHACKO 4-13-00		NAME RECEPTACLE ASSY, POSTED, RT ANGLE, RVS SEX, SIZE 23-19, SERIES 1, CPC —			
	0 PLC ± — 1 PLC ± — 2 PLC ± .03 3 PLC ± .010 4 PLC ± — ANGLES ± —		PRODUCT SPEC —					
	—		APPLICATION SPEC —					
	—		—					
MATERIAL —	FINISH —		WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C=796502	RESTRICTED TO —
CUSTOMER DRAWING					SCALE 2:1	SHEET 1 of 1		REV D