
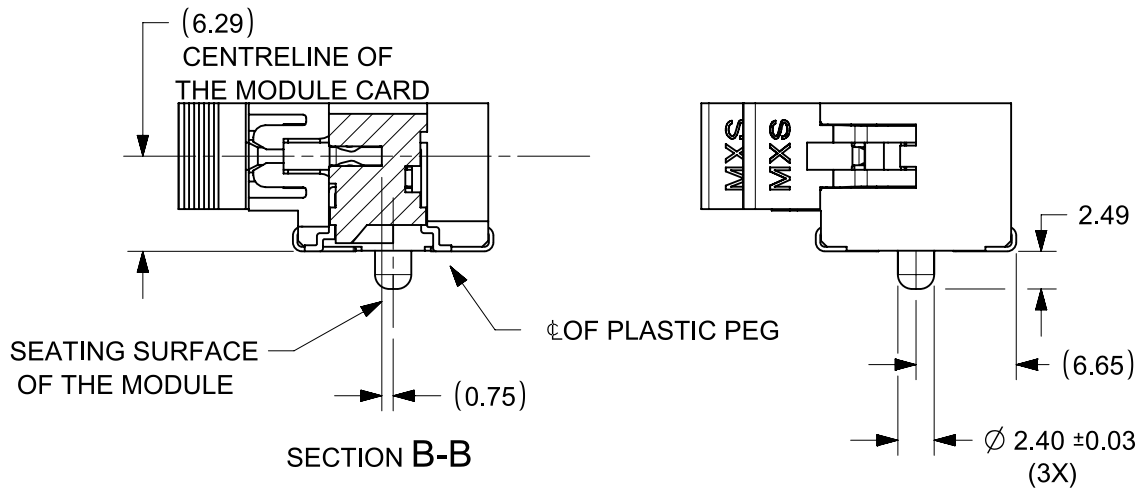
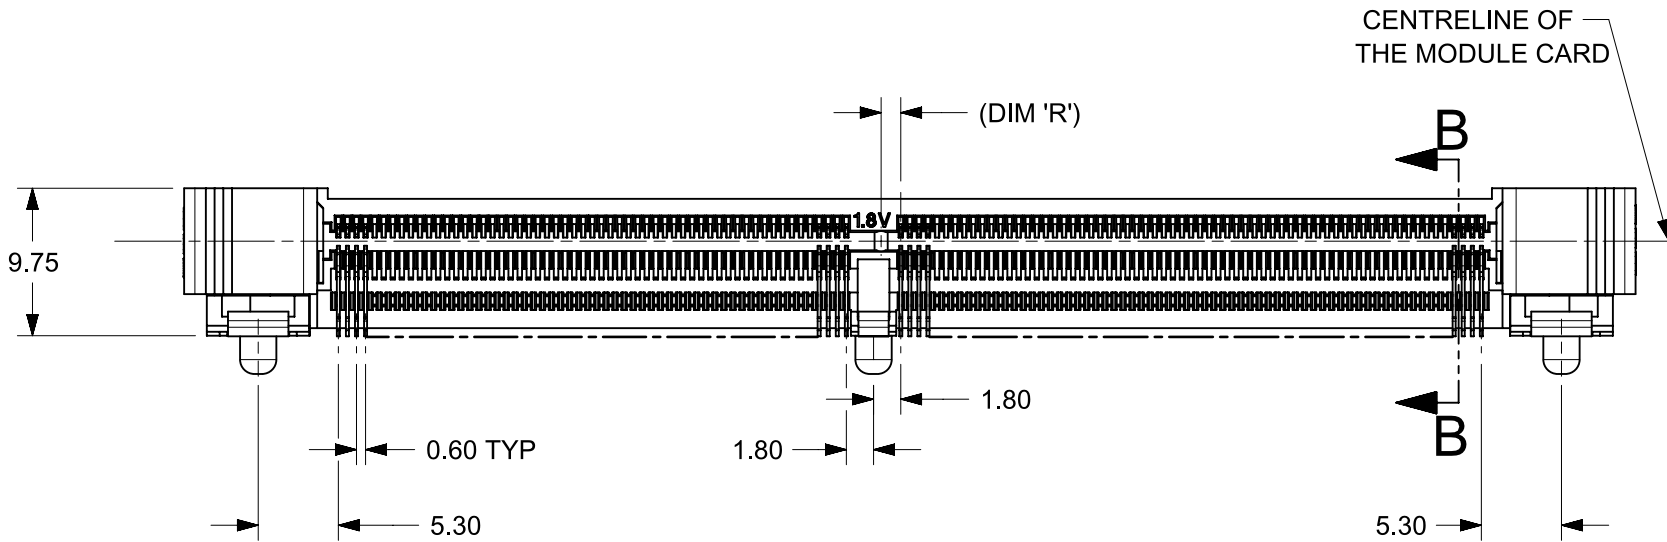


NOTES :

- 1) MATERIAL :
HOUSING : HIGH TEMPERATURE LIQUID CRYSTAL POLYMER, UL94V-0
COLOUR : BLACK
CONTACTS : COPPER ALLOY
LATCHES : HIGH TEMPERATURE NYLON, UL94V-0
COLOUR : NATURAL (OFF-WHITE)
- 2) FINISH :
CONTACT AREA : 0.76 MICROMETER (30 MICROINCH) MIN GOLD OVER
1.25 MICROMETER (50 MICROINCH) MIN NICKEL
SOLDER LEADS : 2.54 MICROMETER (100 MICROINCH) MIN TIN OVER
1.25 MICROMETER (50 MICROINCH) MIN NICKEL
- 3) ACCEPTS 1.0 mm THICK MEMORY MODULE PER JEDEC MO-244
FOR 244 CKTS AND MO-258 FOR 200 CKTS.
- 4) PRODUCT SPECIFICATION : PS-87918-001
- 5) PACKAGING SPECIFICATION: PRODUCT SHALL BE PACKED IN TRAY.
SEE TABLE ON SHEET 4.

6) DATE CODE SHALL BE MARKED LEGIBLY AS SHOWN :YYDDD

7) PART NUMBER SHALL BE MARKED LEGIBLY AS SHOWN.
87918-XXXX(REFER TO TABLE)

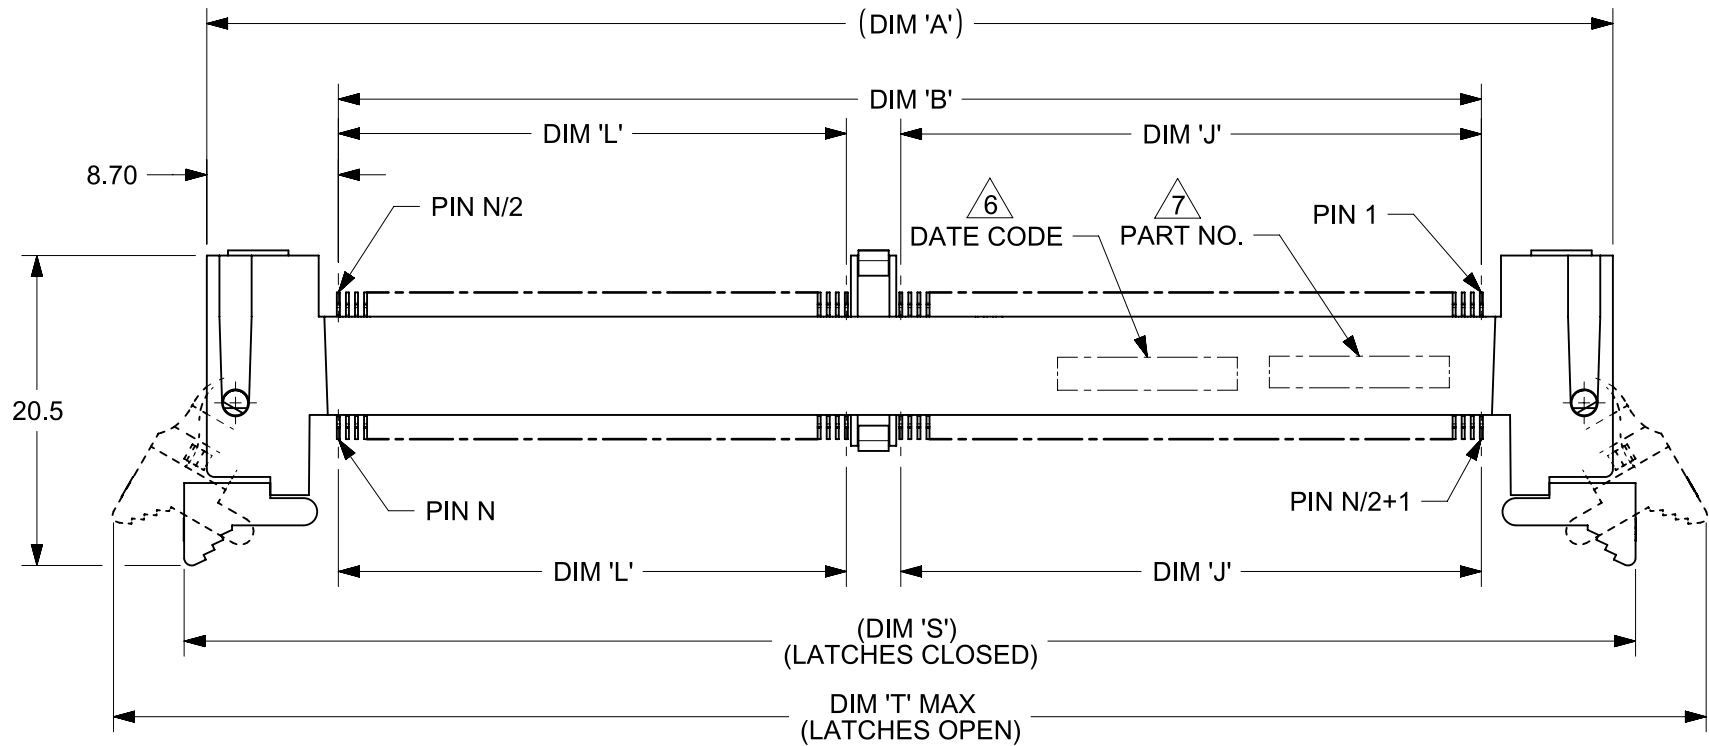

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181			molex MINI DIMM, 0.60MM PITCH 244/200 CKTS				
	MM	NTS	GENERAL TOLERANCES (UNLESS SPECIFIED)	ANGULAR TOL							±	1°
	4 PLACES	±										
DIVISIONAL SYMBOLS	3 PLACES	±	STATUS: Production	DRWN: Vishal Ramesh Hosur	2024-07-16	2024-08-20	2024-08-20	DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION	
	2 PLACES	± 0.130										
	1 PLACE	± 0.25										
	0 PLACES	±										
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION										DRAWING
		A3-SIZE	87918	SEE TABLE	GENERAL MARKET	1 OF 4						

PART NUMBER	CKT SIZE 'N'	MODULE CARD	VOLTAGE KEY	DIM 'R'	DIM 'E'	DIM 'J'	DIM 'L'	DIM 'A'	DIM 'S'	DIM 'T'	DIM 'U'	DIM 'V'	DIM 'C'	DIM 'D'	DIM 'B'	PACKAGING SPECIFICATION
87918-0001	244	DDR2	1.8 V	1.30	39.60	38.40	33.60	93.0	96.0	106.2	78.00	82.00	45.50	86.20	75.60	PK-87918-002
87918-0301		DDR3	1.5 V	2.30												
87918-0202	200	DDR	2.5 V	2.30	24.60	23.40	35.40	79.8	82.8	93.0	64.80	68.80	30.50	73.00	62.40	PK-87918-001
87918-0302	244	DDR3	1.5 V	2.30	39.60	38.40	33.60	93.0	96.0	106.2	78.00	82.00	45.50	86.20	75.60	PK-87918-005

FUNCTIONAL SYMBOLS F_A = 0 F_C = 0 F_E = 0 DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
	DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181				molex			
	MM		NTS									
	GENERAL TOLERANCES (UNLESS SPECIFIED)								MINI DIMM, 0.60MM PITCH 244/200 CKTS			
	ANGULAR TOL ± 1°											
	4 PLACES		±									
	3 PLACES		±		STATUS: Production DRWN: Vishal Ramesh Hosur							