
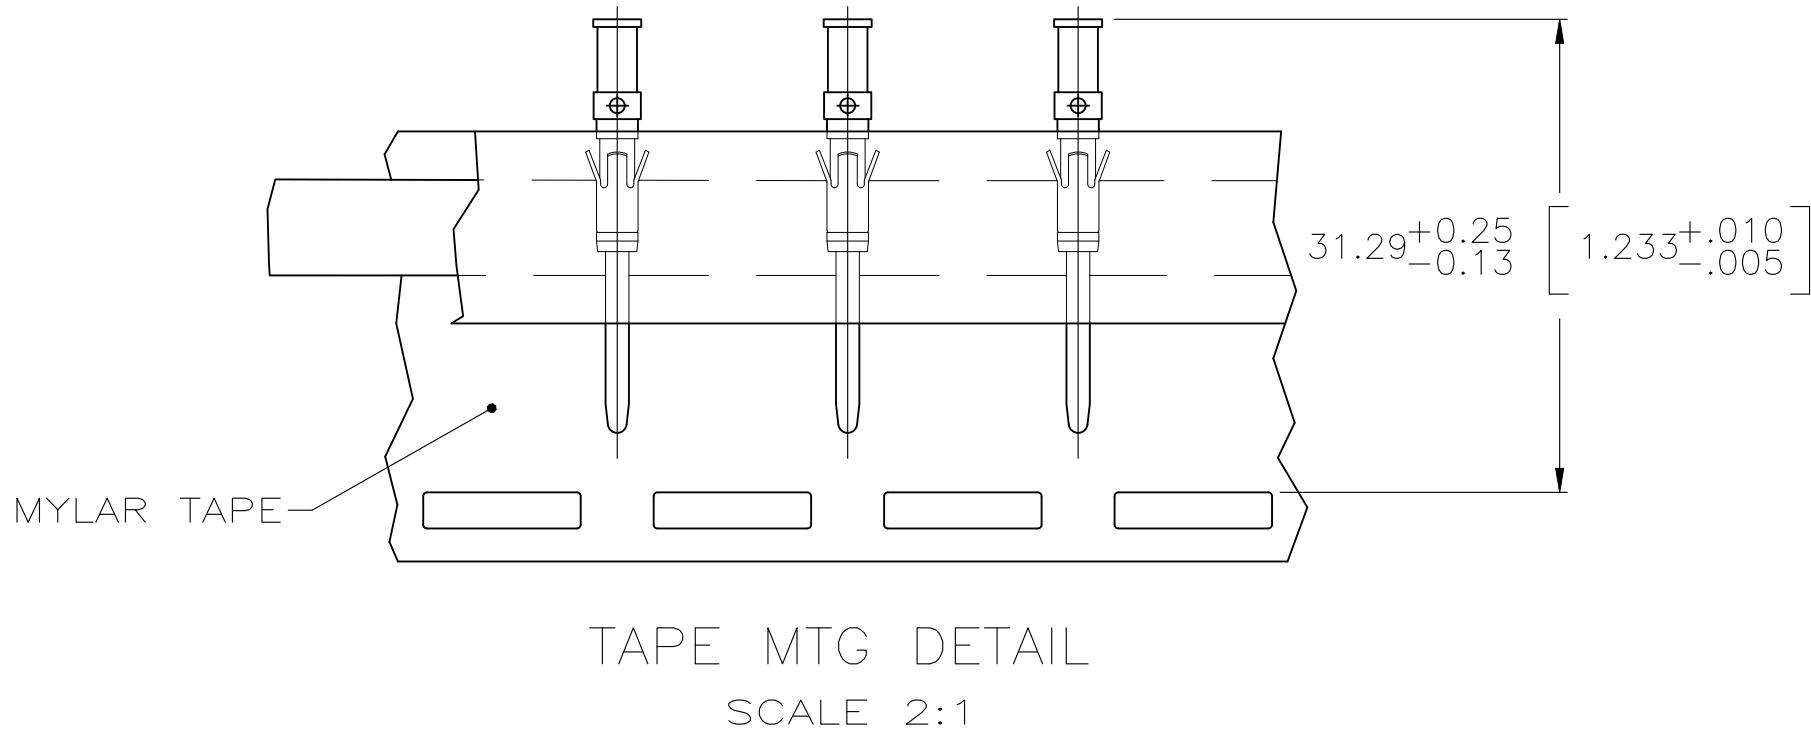


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AM	REVISED PER ECR-24-213591	28JUN2024	RK	FJS

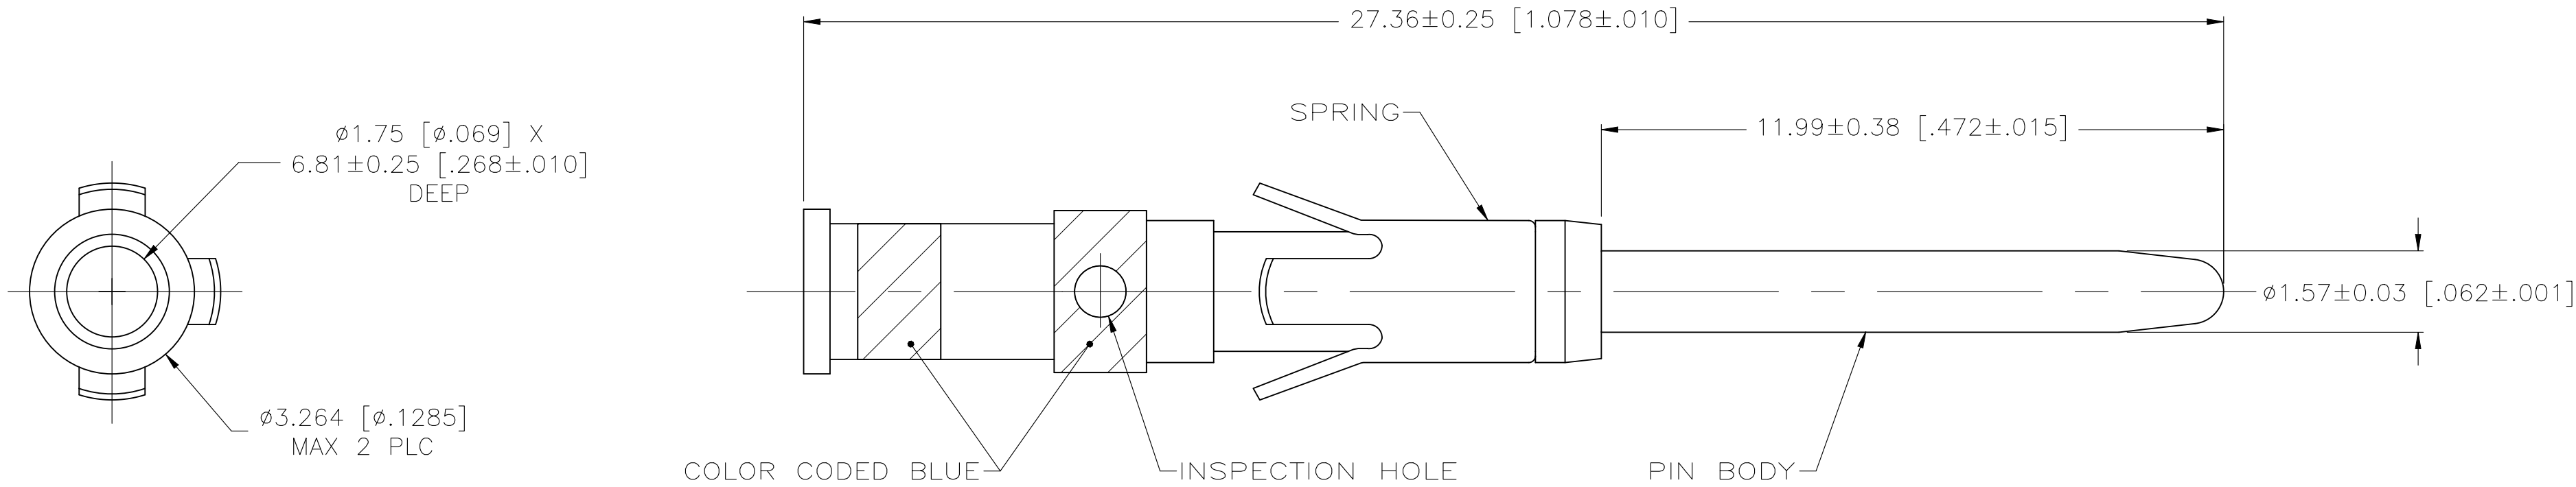

NOTES:

- 1 0.76um [.000030] MIN PRECIOUS METAL PLATE OVER 1.27um [.000050] MIN NICKEL. CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPEC 108-10042, BASED ON EIA-364-1000.01 (CONTROLLED ENVIRONMENT APPLICATIONS).
- 2 1.27um [.000050] MIN TIN-LEAD OVER 1.2um [.000050] MIN NICKEL.
- 3 WHEN ORDERING CONTACT ASSEMBLY ON TAPE, ORDER BY THE TAPE NUMBER PLUS PACKAGING CODE AS FOLLOWS:
1. FOR USE WITH AMP TAPETRONIC, PNEUMATIC TOOL
A. 1000 PARTS TO A BOX ADD PACKAGING CODE: 1MBOX
2. FOR USE WITH 4/8 INDENT STRIPPER CRIMPER
A. 1000 PARTS TO A REEL ADD PACKAGING CODE: 1MREEL
B. 5000 PARTS TO A REEL ADD PACKAGING CODE: 5MREEL
4. CONTACT ACCEPTS 16-18 WIRE SIZE.
- 5 7.62 um [.000300] MIN 60/40 MATTE TIN-LEAD OVER 1.27 um [.000050] MIN NICKEL.
- 6 7.62um[.000300] MIN 93/7 TIN/LEAD OVER 1.27um[.000050] MIN NICKEL.
- 7 NO COLOR CODED BANDS.
- 8 7.62um[.000300] MIN TIN OVER 1.27um[.000050] MIN NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	STANDARD	8	7	4-200336-7
9	OBSOLETE	STANDARD	6	7	4-200336-6
9	OBSOLETE	STANDARD	5	7	4-200336-5
9	OBSOLETE	SMALL PACK	1		4-200336-4
	OBSOLETE	STANDARD	2		1-200336-3
		TAPE MTG (SEE DETAIL) 3	1		200336-6
		STANDARD	1		200336-1
		PACKAGING TYPE		PIN BODY FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.GELTZ 04/06/93	TE Connectivity		
DIMENSIONS: mm		CHK R.STONE 4-26-93			
		APVD -	NAME CONTACT ASSEMBLY, PIN, #16, TYPE II -		
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -			
		PRODUCT SPEC -			
MATERIAL PIN BODY: COPPER ALLOY SPRING: STAINLESS STL		FINISH PIN BODY: SEE TABLE	WEIGHT -	SIZE A2	CAGE CODE 00779
CUSTOMER DRAWING			DRAWING NO C-200336	RESTRICTED TO -	REV AM
			SCALE 10:1	SHEET 1 OF 1	